

PVC · WOOD · ALUMINIUM
WINDOWS · ROLLER SHUTTERS · DOORS · GARAGE DOORS

A photograph of a modern living room interior. A large window with a light-colored wooden frame looks out onto a garden with a fountain and trees. On the windowsill, there is a potted plant, a small bowl, and several cushions. In the foreground, a blue sofa is visible. A yellow-bordered box is overlaid on the bottom right of the image, containing the text "DISCOVER DAKO PVC JOINERY!".

**DISCOVER
DAKO PVC
JOINERY!**

WINDOWS

DPP-70

Optimal thermal insulation, richly equipped hardware with the possibility of microventilation and high-class profiles guarantee long years of comfortable use.

Technical information:

- Installation depth: 70 mm
- Glass package: 4/14/4/14/4
- $U_w=0,96 \text{ W/m}^2\text{K}^*$


* reference window 1230 x 1480 mm




Find
out more



Colours:




Golden oak 2178001




Nut 2178007




Winchester 49240



Swamp oak 2052089




Anthracite 701605




Dark grey silk
4367003



Woodec oak
F4703001



Anthracite
grey ulti - matt
02.20.71.000001
- 504700



Black mat
02.12.01.000004
- 809700

Doors are also
available in special
colours:



DPQ-82 thermoSecure

The warmest series of DAKO windows with a unique Swisspacer ultimate frame and a special glazing package which provide up to 100% more light and thermal gains.

Technical information:

- Installation depth: 82 mm
- Glass package: 4Eclaz/18/4/18/4Eclaz
- $U_w=0,75 \text{ W/m}^2\text{K}^*$
- V-perfect weld for double-sided veneer


* reference window 1230 x 1480 mm




Find
out more



Colours:




Golden oak 2178001



Nut 2178007




Winchester 49240



Swamp oak 2052089



Anthracite 701605




Dark grey silk
4367003



Wooded oak
F4703001



Anthracite
grey ulti - matt
02.2071.000001
- 504700



Black mat
02.12.01.000004
- 809700

Doors are also
available in special
colours:



eXplore DPX-76 series

Energy-efficient, triple glazed PVC window with additional solutions for user comfort and a healthy interior microclimate.




Technical information:

- Installation depth: 76 mm
- Glass package: 4/18/4/18/4
- $U_w = 0,78 \text{ W/m}^2\text{K}^*$
- Surface mounted hinges
- 2 anti-burglary strikers
- Handle Secustik

* Factor value for reference construction: window 1230x1480 mm



Colours:

								
Black & brown 2.20.81.000010 116700	Concrete grey 02.2071.000019 6700	Golden oak F436-2076	Nut 9.2178.307 116700	Anthracite 02.2071.000001 116700	Anthracite grey ultra-mat F436-6003a	Mahogany 9.2065.321 116700	Winchester 4.0175.005 114800	Dark grey silk 02.2071.000001 808300
								
Swamp oak 9.2052.389 116700	Silver gray 02.2071.000007 116700	Black matt F476-6062	White 02.20.91.000001 116801	Natural oak F470-3001				



DPQ-82 AL

Product made from PVC and aluminium, effectively combines the advantages of both materials. Provides a functional, durable and elegant solution, tailored to the needs of the most demanding users.

Technical information:

- Installation depth: 87 mm
- Glass package: 4/18/4/18/4
- $U_w=0,77 \text{ W/m}^2\text{K}^*$
- V-perfect weld on the inner veneer

* refernece window 1230 x 1480 mm




Find
out more




Colours:

PVC profile (inner side)



Golden oak 2178001



Nut 2178007




Winchester 49240



Swamp oak
2052089



Anthracite 701605




Dark grey silk
4367003



Wooddec oak
F4703001



Anthracite
grey ulti - matt
02.2071.0000001
- 504700



Black mat
02.12.01.0000004
- 809700

Windows are also
available in special
colours:



Aluminium cladding
(outside)



+200

OPTIONAL COLOUR – RAL PALETTE



SLIDING SYSTEMS


HST Motion

Patio doors in a lift-and-slide system

Panoramic patio doors with optimal thermal insulation, practical opening system and outstanding aesthetics. Excellent solution for those looking for additional light.

Technical information:


- Installation depth: sash 82 mm, frame 194 mm
- system: lift-slide
- maximum dimensions: width: 6,5 m, height: 2,7 m (for white) and 2,5 m (other colours)
- 62 mm threshold made of vinyl
- V-perfect weld
- $U_w=0,83 \text{ W/m}^2\text{K}$

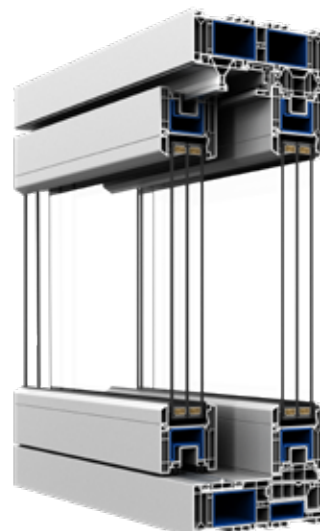


Find
out more



Colours:




Golden oak 2178001




Nut 2178007




Winchester 49240



Swamp oak 2052089




Anthracite 701605




Dark grey silk
4367003



Woodec oak
F4703001



Anthracite
grey ulti - matt
02.2071.000001
- 504700



Black mat
02.12.01.000004
- 809700

Windows are also
available in special
colours:



FRONT DOORS



DPQ-82 AL | PVC Panel Overlay Doors

A modern proposition combining comfort of use, elegant design and optimal thermal insulation properties. Provides a high level of security and increased resistance to atmospheric factors.

Technical information:

- 7-chamber profile
- Aluminium doorstep with 20 mm high thermal plate
- 65mm thick panel filled with polyurethane foam
- 2-chamber double-sided safety glass 33.1/18/4/18/33.1 $U_g=0,5 \text{ W/m}^2\text{K}$
- V-perfect weld
- $U_w=0,81 \text{ W/m}^2\text{K}^*$
- Transport/mounting extension of 30mm



Find
out more



Most popular models:



AUREA



NIMFA



LILLA



EUNIKA



SABANA



PVC Batch Doors

The advantages of this product include high aesthetics, easy care, as well as resistance to damage and weather conditions. A rich variety of colours, veneers and decors allows to easily match it to the nature of the investment.

Technical information:

- energy efficient profile DPQ-82 or thermally efficient profile DPP-70 and DPB-73
- waterproof thermal insulation panel or composite glazing
- 20 mm high aluminium doorstep with a thermal barrier
- Transport/mounting extension of 30mm



Find
out more



Most popular models:



EK-03A



EK-53A



NL-EK17A



NL-EK25A



EK-41A

Explore modern PVC joinery with DAKO!



**FAMILY
BUSINESS**



**SINCE
1994**



33 800 M²

Office phone: +48 661 61 64 20, +48 695-460-489

e-mail: jolanta.nowak@dako.eu, kinga.ploskonka@dako.eu



DAKO.EU