





WORTH KNOWING

TYPES OF VENEERS



- FINISH FOILS** - basic group of veneers.
- 3D FOILS** - foils with increased durability and excellent aesthetic values, 3D wood structure effect.
- DRE-CELL FOILS** - premium foils based on polypropylene, which are characterized by rich patterns and colors, while at the same time having high resistance to mechanical damage and guaranteeing high utility values.
- ACRYLIC LAMINATES** -top quality laminates with a thickness of 0.7 - 0.8 mm with a high degree of gloss or a deep super matt effect.
- CPL LAMINATES** - CPL laminates with a thickness of 0.15 to 0.7 mm, with the highest quality parameters and resistance to mechanical damage. We recommend for rooms with high traffic.
- SYNCHRONOUS LAMINATES** -laminated boards that perfectly reproduce the colors and structure of wood. They have excellent technical values and increased resistance to mechanical damage.
- PAINTED** - our doors are painted with premium acrylic varnishes using UV rays hardening technology.

PARAMETERS



FIRE RESISTANCE -
class EI30 or EI60



ACOUSTIC INSULATION
- Rw=37 dB parameter



MECHANICAL RESISTANCE CLASS



SMOKE PROOF



ACOUSTIC INSULATION
- parameter Rw=42 dB



Anti-burglary
- RC2 or RC3 class

SILENT PACKAGE 37dB

- the package includes a dropping seal and a special door leaf filling consisting of a package of acoustic panels. The Silent 37dB package is available in selected panel construction door collections.

REBATED OR NON-REBATED?



NON-REBATED DOORS

Non-rebated doors are flushed with the door frame architraves and create one surface with them. The side surface of the door leaf is free of cutouts on the opening side. Concealed hinges and a magnetic lock complete the minimalist effect.



REBATED DOORS

Rebated doors have a visible cutout in the side edge of the door leaf, where it meets the frame, when opened. In this solution, the hinges are visible on the side on which the door opens.

LEFT OR RIGHT?

LEFT

Left doors have hinges on the left side and the handle on the right.



RIGHT

The right door has the hinges on the right side and the handle on the left.



Table of contents

N	WATERPROOF DOOR FRAME	
	DOORS IN ACRYLIC LAMINATES	
N	› Ilis.....	6
N	› Nella.....	8
N	› Vetro D2.....	10
S N	› Silia.....	12
	FRAME AND PANEL DOORS	
	› Vetro E-Synchro / DRE-Cell.....	16
S M	› Estra.....	18
	› Nestor.....	20
S M	› Auri.....	22
S	› Reva.....	24
M	› Verso.....	26
	› Fosca.....	28
S	› Premium.....	30
	› Piano.....	32
	› Scala.....	34
M	› Lumio.....	36
	› Vico.....	38
	› Triesta.....	40
	› Ena.....	42
	› Otto.....	44
N	› Volta.....	46
	› Vetro D1.....	48
	FRAME AND PANEL DOORS PAINTED	
	› Berge.....	50
	› Even.....	52
	› Nestor.....	54
	› Vetro E.....	56
	FLUSH DOORS	
S	› Nova -Cell.....	60
S	› Nova - Synchro.....	62
S N	› Rezzo.....	64
S	› Lux.....	66
S	› Rivia.....	68
S	› Galeria Alu.....	70
S	› Finea and Finea B.....	72
S	› Deco.....	74
S	› Modern.....	76
S	› Plus.....	78
S M	› Standard.....	80
S	› Fano.....	82
S	› Arte.....	84
	FLUSH DOORS PAINTED	
S M	› Uni.....	86
S	› Fargo.....	88
S M	› Binito.....	90
	FLUSH DOORS CPL LAMINATE	
M	› Standard Invest.....	92
S	› Standard CPL.....	94
	FLUSH DOORS WITH VARIABLE HEIGHTS	
	› Standard 10.....	96
	› Modern.....	76
	› Plus.....	78
	DOORS WITH HIDDEN DOOR FRAME	
	› Profi.....	100
M	› Sara eco 2.....	102
	SLIDING AND FOLDING SYSTEMS	
	› Wall mounted sliding system.....	106
	› Glass doors sliding system.....	107
	› Spazio CD wall-mounted sliding system.....	108
	› SL door frameless cassette.....	109
	› Plus door frame cassette.....	110
	› Folde.....	112
	SIDE PANELS	
	› Flush side panels.....	114
	› Frame and panel side panels.....	115
	TRANSOM LIGHTS AND SIDE LIGHTS	
	› Transom lights and side lights.....	116
	INTERIOR ENTRANCE FLUSH DOOR LEAVES	
	› Enter/Solid.....	120
	› Solid RC2.....	124
N	› Nefryt RC3 / RC3 EI30.....	126
N	› Nefryt RC3 / RC3 EI30.....	127
N	› Steel hybrid door frame OSH2.....	128
N	› Steel hybrid door frame OSH LUX.....	129
N	› Steel fixed door frame OSS2.....	130
N	› Door panels.....	131
	TECHNICAL DOORS	
	› Athos fire resistant doors EI30.....	132
	› Fire resistant doors Olimp EI30 EI 60.....	134
	› Steel door frame, wooden, fire-resistant.....	136
	› Enter Acoustic Rw=32dB.....	137
	GLASS DOORS	
	› Galla.....	138
	› Fittings for glass doors.....	139
	DOOR FRAMES	
	› Fixed rebated door frames.....	142
	› Fixed non-rebated door frames.....	143
N	› Waterproof adjustable door frame.....	144
M	› Adjustable door frames.....	146
M	› Adjustable non-rebated door frames.....	148
	› Adjustable rebated door frames with variable heights.....	150
	› Adjustable non-rebated door frames with variable heights.....	151
	› Adjustable door frames with inverted rebate.....	152
	› Adjustable tunnel.....	153
	› Adjustable non-rebated door frames with angle panels.....	154
	› Extension panels.....	156
	› Steel fixed door frame.....	158
	› Steel adjustable door frame.....	161
	› Steel adjustable non-rebated door frame.....	163
	› Steel hybrid door frame.....	164
	› Steel hybrid non-rebated door frame.....	166
	› Small angular steel door frames.....	167
	ACCESSORIES, ADDITIONAL INFORMATIONS	
	› Door handles and accessories.....	170
	› Glass panes patterns.....	177
	› Decors.....	178
	› Architraves and skirting boards.....	180
	› Ventilation accessories and other.....	181
	TECHNICAL INFORMATION	182-195

N - New product
M - Product available from the stock
O - Collection with inverted rebate option
S - option in the "xN" width standard available for a specific configuration



DRE

Innovative, waterproof
door frame manufactured
in Poland



Waterproofness confirmed by tests

DRE WaterProof door frame resists deformation, even with prolonged, continuous contact with water. This is thanks to innovative materials and a precise manufacturing process.



Proven design

DRE WaterProof door frame is visually identical to MDF models. It features the same decorative finishes. This allows you to match door frames with different properties and use them in the same space while maintaining a consistent aesthetic.



Polish production and full quality control

To ensure complete control over the production cycle, a dedicated plastics processing facility has been established. This allows for oversight of every stage of DRE WaterProof door frame production process. This ensures the highest standards of workmanship.




Ecological approach and second life of raw materials

Wood flour is used in the production of the door frame. It's a byproduct of plants that process MDF, particleboard, and solid wood. Its new use has led to the creation of a durable and aesthetically pleasing product in the spirit of sustainable development.

Technical information and prices on page **144** of the catalogue



More on the website
www.dre.pl/waterproof



Proprietary technology

After four years of research and development, Polish experts created a unique formula. It combines wood flour with synthetic materials and strength-enhancing additives – all in a strictly controlled extrusion process.

ILIS



ILIS 3 - bigio



ILIS 3 - cubanit

DECORS

STANDARD GLASS	bianco	magnolia	moro	NEW cashmere	NEW cappuccino
METALIC GLOSS	cubanit	gabbiano	bigio		
STANDARD MATT	bianco matt	cemento matt	moro matt		

STANDARD OPTIONS

- edge whitout rebate
- door leaf covered with glossy laminate, standard matt
- stiles and rails made of MDF
- magnetic/mechanical lock for simple key, bathroom lock, cylinder lock or economic lock in steel and black color or magnetic in white color - to choose from
- glass pane MAT DRE 4 mm thick in ILIS 1-3
- core made of 20 mm MDF board in ILIS 4
- complex safe 8 mm glass pane MAT DRE in ILIS 5
- sockets for 2 recessed Estetic 80 hinges (hinges constitute a part of the door frame)

OPTION WITHOUT EXTRA CHARGE

- glass pane DECORMAT BROWN, DECORMAT GRAPHITE and 4 mm transparent glass in ILIS 1 - 3
- complex safe 8 mm glass pane transparent in ILIS 5
- holes for ventilation sleeves
- sliding door - 2043 mm height

OPTIONS AVAILABLE WITH EXTRA CHARGE

- door leaf „100”
- ventilation undercut
- recuperative shortcut -8 mm
- cover strip for double leaf door
- double leaf door

door leaf price x2

NOTE: Third Estetic 80 hinge for non-rebated doors (extra charge is added to the price of the door frame)

ILIS MODELS



ILIS 1



ILIS 2



ILIS 3



ILIS 4



ILIS 5

Sliding system - it is possible to use SPAZIO CD sliding system with a standard door leaf height of 2043 mm.

Gloss laminate. 0.7-0.8 mm of thickness is a modern laminate with a high degree of gloss, giving the effect of a mirror reflection. It is characterized by a perfectly smooth surface with increased scratch resistance.

STANDARD MATT Laminate with the 0,7-0.8 mm of thickness, the same properties as a high-gloss surface. The only difference is the degree of gloss of the hardcoat layer. Thanks to the pore-free hardcoat coating, the laminate can be used in rooms with the highest hygienic requirements.

NELLA



NELLA 6 - bianco



NELLA 1 - gabbiano

DECORS

STANDARD GLASS	bianco	magnolia	moro	NEW cashmere	NEW cappuccino
METALIC GLOSS	cubanit	gabbiano	bigio		
STANDARD MATT	bianco matt	cemento matt	moro matt		



STANDARD OPTIONS

- edge whitout rebate
- door leaf covered with glossy laminate, standard matt
- stiles and rails made of MDF
- magnetic/mechanical lock for simple key, bathroom lock, cylinder lock or economic lock in steel and black color or magnetic in white color - to choose from
- glass pane MAT DRE 4 mm thick
- sockets for 2 recessed Estetic 80 hinges (hinges constitute a part of the door frame)

OPTION WITHOUT EXTRA CHARGE


- glass pane DECORMAT BROWN, DECORMAT GRAPHITE and transparent glass pane
- holes for ventilation sleeves
- sliding door - 2043 mm height

OPTIONS AVAILABLE WITH EXTRA CHARGE

- door leaf „100”
- ventilation undercut
- recuperative shortcut -8 mm
- cover strip for double leaf door
- double leaf door

door leaf price x2

NOTE: Third Estetic 80 hinge for non-rebated doors (extra charge is added to the price of the door frame)

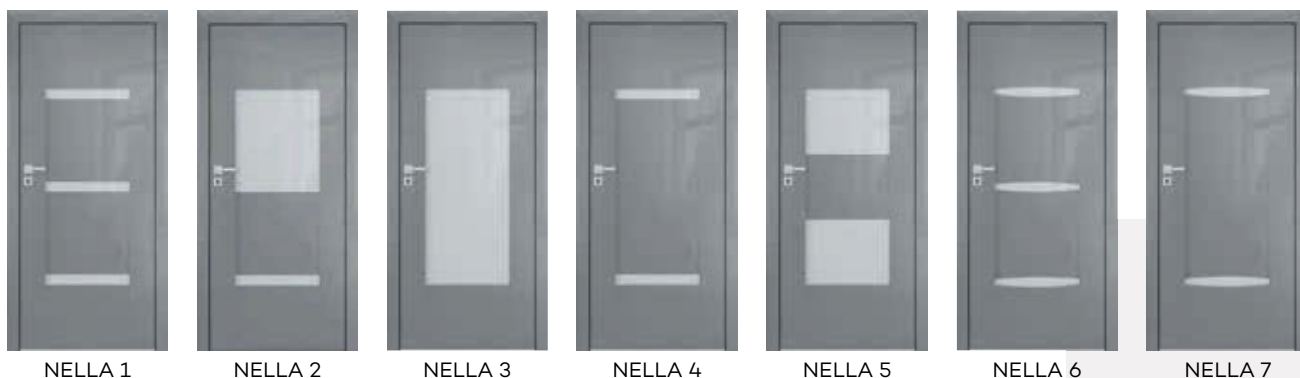NELLA MODELS

NELLA 1

NELLA 2

NELLA 3

NELLA 4

NELLA 5

NELLA 6

NELLA 7

Sliding system - it is possible to use SPAZIO CD sliding system with a standard door leaf height of 2043 mm.

Gloss laminate. 0.7-0.8 mm of thickness is a modern laminate with a high degree of gloss, giving the effect of a mirror reflection. It is characterized by a perfectly smooth surface with increased scratch resistance.

STANDARD MATT Laminate with the 0.7-0.8 mm of thickness, the same properties as a high-gloss surface. The only difference is the degree of gloss of the hardcoat layer. Thanks to the pore-free hardcoat coating, the laminate can be used in rooms with the highest hygienic requirements.

VETRO D2



VETRO D2 - cappuccino



VETRO D2 - cubanite

DECORS

STANDARD GLASS	bianco	magnolia	moro	NEW cashmere	NEW cappuccino
METALIC GLOSS	cubanite	gabbiano	bigio		
STANDARD MATT	bianco matt	cemento matt	moro matt		



ventilation undercut



VETRO D2

NON-REBATED DOOR LEAVES
interior doors

STANDARD OPTIONS

- edge whitout rebate
- door leaf covered with glossy laminate, standard matt
- door leaf frame made of MDF, narrow element with constant width, wide element with variable width
- core made of perforated chipboard
- magnetic/mechanical lock for simple key, bathroom lock, cylinder lock or economic lock in steel and black color or magnetic in white color - to choose from
- complex safe MAT DRE 8 mm glass
- sockets for 2 hidden concealed Estetic 80 hinges (non-rebated door frames are equipped with hinges)

OPTION WITHOUT EXTRA CHARGE

- complex safe transparent 8 mm glass pane
- sliding door - 2043 mm height
- 8 mm black laminated glass pane

OPTIONS AVAILABLE WITH EXTRA CHARGE

- door leaf „100“
- ventilation undercut
- cover strip for double leaf door
- double leaf door door leaf price x2

- **NOTE:** third Estetic 80 hinge for non-rebated doors (extra charge is added to the price of the door frame)
- **NOTE:** VETRO D2 sliding door leaves do not fit sliding system with PLUS door frame cassette.
- **NOTE: There is no possibility to shorten door leaf.**
- VETRO D2 – meets ventilation requirements for widths "80" - "100" with ventilation undercut

VETRO D2 MODELS



Sliding system - it is possible to use SPAZIO CD sliding system with a standard door leaf height of 2043 mm.

Gloss laminate. 0.7-0.8 mm of thickness is a modern laminate with a high degree of gloss, giving the effect of a mirror reflection. It is characterized by a perfectly smooth surface with increased scratch resistance.

STANDARD MATT Laminate with the 0,7-0.8 mm of thickness, the same properties as a high-gloss surface. The only difference is the degree of gloss of the hardcoat layer. Thanks to the pore-free hardcoat coating, the laminate can be used in rooms with the highest hygienic requirements.



SILIA 10 - standard gloss cashmere



SILIA steel BULAJ - bigio



DECORS

STANDARD GLOSS	bianco	magnolia	moro	NEW cashmere	NEW cappuccino
METALIC GLOSS	cubanit	gabbiano	bigio		
STANDARD MATT	bianco matt	cemento matt	moro matt		

Note: the option to choose a patterned edge applies only to doors in the bianco decor.

EDGE BANDING PATTERNS



theme 1

theme 2

theme 3

STANDARD OPTIONS

- edge whitout rebate
- core made of perforated chipboard
- door leaf covered with glossy laminate, standard matt
- edge banding in door leaf colour
- magnetic/mechanical lock for simple key, bathroom lock, cylinder lock or economic lock in steel and black color or magnetic in white color - to choose from
- sockets for 2 hidden recessed Estetic 80 hinges (hinges constitute a part of the door frame)

OPTION WITHOUT EXTRA CHARGE

- holes for ventilation sleeves
- sliding door - 2043 mm height

OPTIONS AVAILABLE WITH EXTRA CHARGE

- edge motif 1, 2 or 3 (only bianco color)
- door leaf „100”
- ventilation undercut
- recuperative shortcut -8mm
- cover strip for double leaf door
- aluminum ventilation grille
- double leaf door

door leaf price x2

NOTE: Third Estetic 80 hinge for non-rebated doors (extra charge is added to the price of the door frame)

SILIA MODELS



SILIA 10
bianco



SILIA 10
cappuccino



SILIA 10
magnolia



SILIA 10
gabbiano




BULAJ
STEEL
bigio

Sliding system - it is possible to use SPAZIO CD sliding system with a standard door leaf height of 2043 mm.

Gloss laminate. 0.7-0.8 mm of thickness is a modern laminate with a high degree of gloss, giving the effect of a mirror reflection. It is characterized by a perfectly smooth surface with increased scratch resistance.

STANDARD MATT Laminate with the 0.7-0.8 mm of thickness, the same properties as a high-gloss surface. The only difference is the degree of gloss of the hardcoat layer. Thanks to the pore-free hardcoat coating, the laminate can be used in rooms with the highest hygienic requirements.

FRAME AND PANEL DOORS

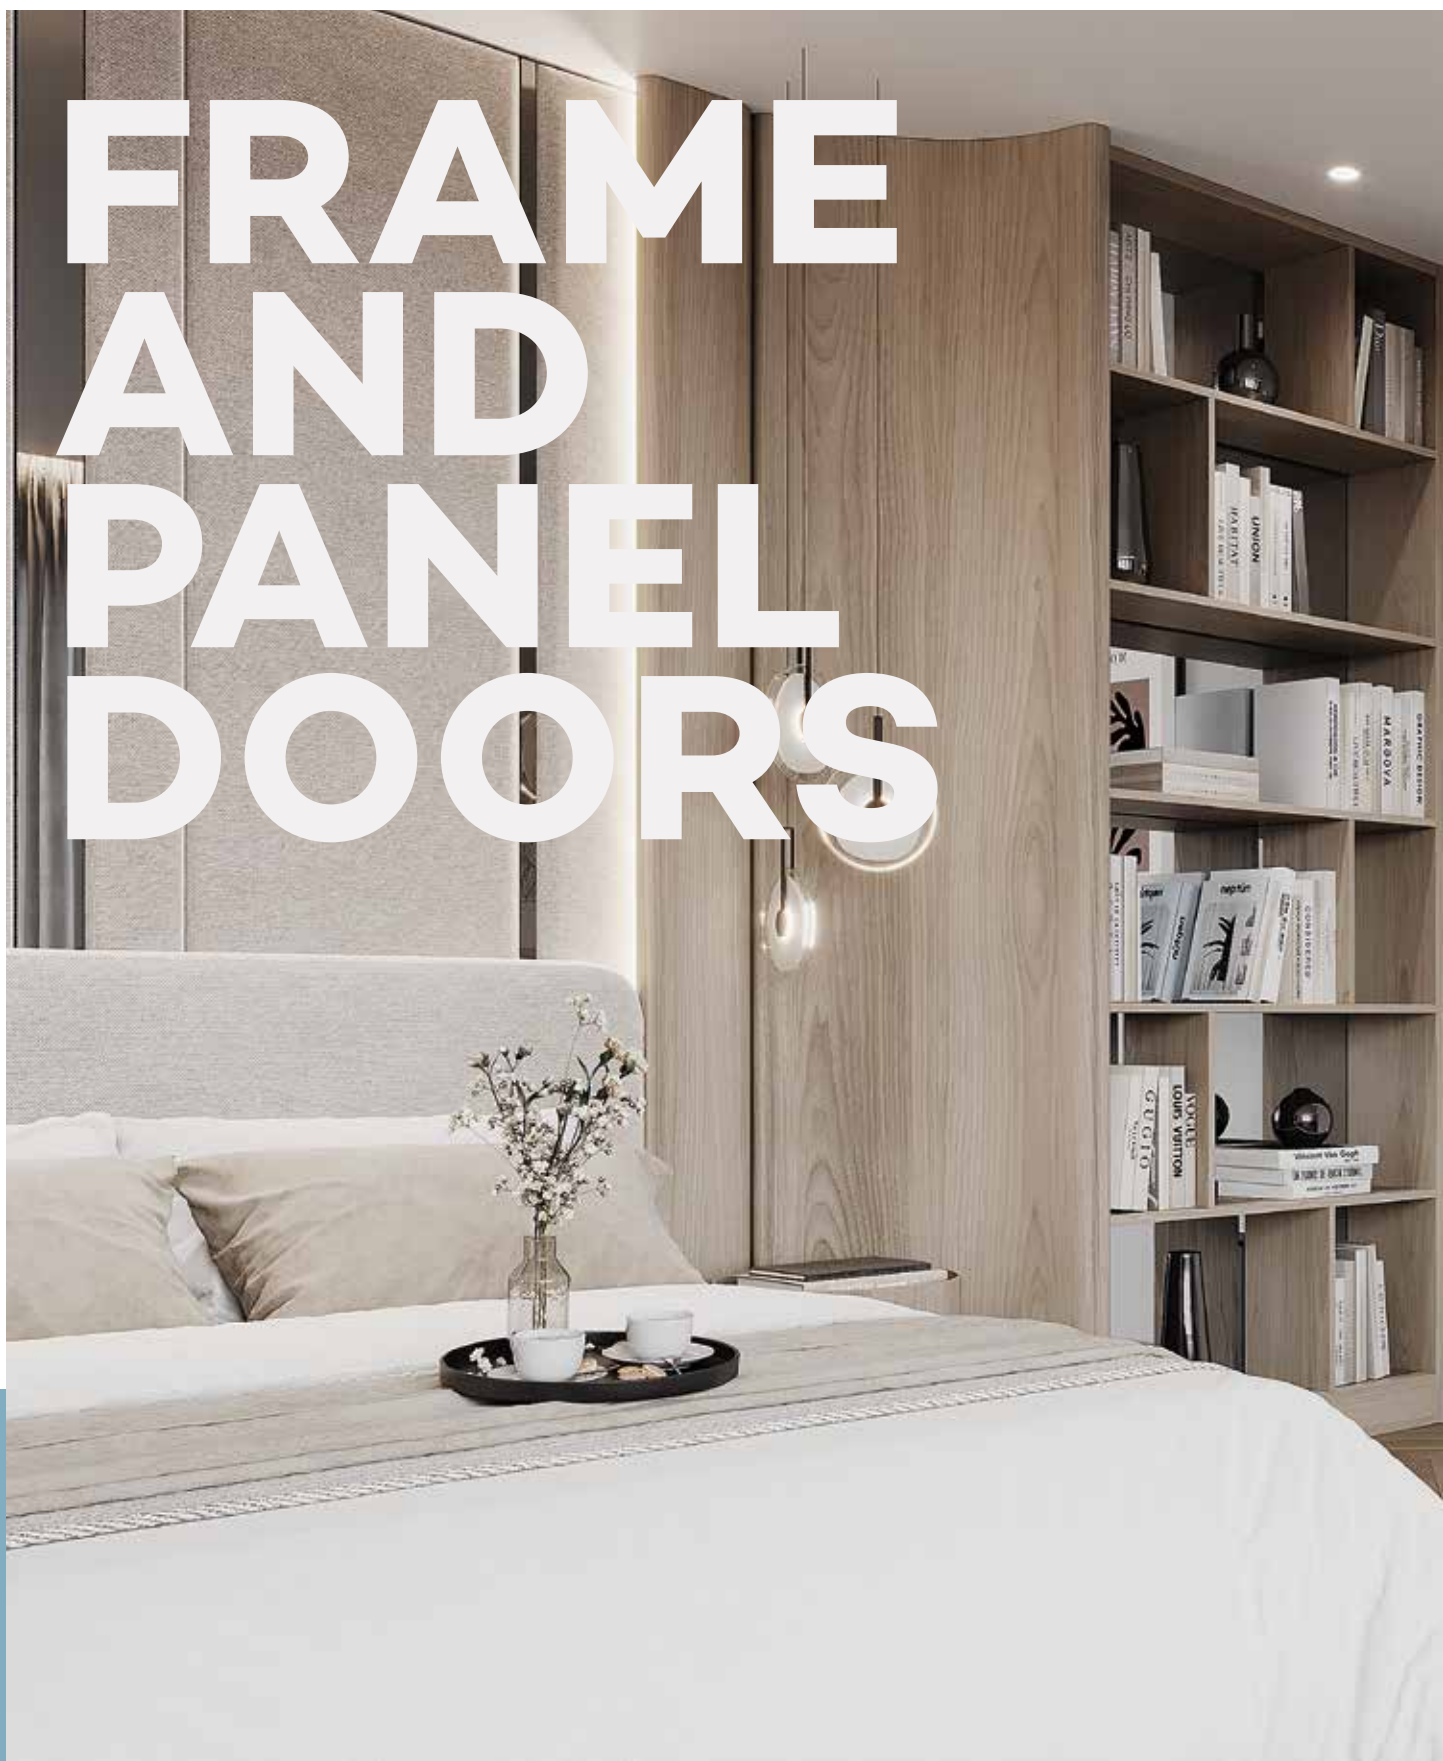

Frame and panel doors are characterized by a modern appearance and excellent durability. In addition, surface finishes with foils, laminates or acrylic varnishes provide durability, ease of care and a wide range of adjustment aesthetic options for interiors.



VETRO E - CASHMERE MATT

VETRO E



VETRO E - natural halifax oak



VETRO E - natural halifax oak

DECORS

EGGER LAMINATES	halifax gray oak	halifax natural oak	Halifax Tabac Oak				
	white matt	light gray matt	warm gray matt	cashmere matt	sage matt	dark olive matt	dark blue matt
	black matt 2						

ventilation undercut



VETRO E

REBATED AND NON-REBATED DOOR LEAVES

interior doors

STANDARD OPTIONS

- door leaf surface covered with DRE-CELL foil or 3 mm thick laminated synchronous board (EGGER laminate)
- reinforced MDF frame
- core made of tubular chipboard
- DECORMAT tempered laminated 8 mm glass pane with fixed width (regardless the width of the door leaf) or laminated black tempered 8 mm glass pane (opaque) with fixed width (regardless the door leaf width)

REBATED DOOR LEAF

- straight edge in black color
- for natural halifax oak decor, the edge in the color of the door leaf or black
- 3 screw-in hinges
- single-point mortise simple key lock, bathroom lock, cylinder lock or economic lock

NON-REBATED DOOR LEAF (extra charge)

- black non-rebated edge for laminates from 1st and 2nd group
- edge without rebate in the color of the door leaf for DRE-CELL foil
- for natural halifax oak decor, the edge in the color of the door leaf or black
- sockets for 2 Estetic 80 recessed hinges in steel, black or white color (hinges constitute a part of the door frame)
- magnetic simple key lock, bathroom lock, cylinder insert lock or economic lock in steel, black or white color

DOOR FRAMES

- for door leaves from the Vetro E collection in synchronous laminates, we recommend door frames in black matt foil 2 and in CPL laminate natural halifax oak in a longitudinal arrangement, in the second CPL price group
- for door leaves from Vetro E collection in DRE-CELL foils, we recommend door frames in the color of the door leaf

OPTIONS AVAILABLE WITH EXTRA CHARGE

- ventilation undercut
- non-rebated door leaves 1st, 2nd group
- black fittings for rebated door leaf
- adjustable hinge for rebated door leaf set.

SLIDING DOOR LEAF

- edge whitout rebate
- socket for hook lock and/or for handles

NOTE: sliding VETRO E door leaves do not fit the sliding system with PLUS door frame cassette.


NOTE: There is no possibility to shorten door leaf.

NOTE: Third Estetic 80 hinge for non-rebated doors (extra charge is added to the price of the door frame)

VETRO E – meets ventilation requirements for widths "80" - "100" with ventilation undercut

NOTE: It is required to use together with VETRO rebated door leaf model door frames equipped with 3 hinges.

VETRO E MODELS

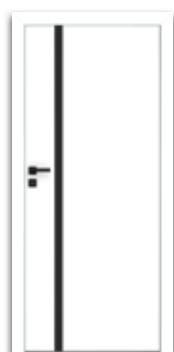

VETRO E
white matt
(black glass pane)



VETRO E
cashmere matt
(DECORMAT glass
pane)



VETRO E
warm gray matt
(DECORMAT glass
pane)



VETRO E
sage matt
(black glass pane)



VETRO E
dark olive matt
(black glass pane)



VETRO E
dark blue matt
(DECORMAT glass
pane)



VETRO E
halifax gray oak



VETRO E
halifax oak
natural



VETRO E
Halifax Tabac Oak

ESTRA



ESTRA 10 mirror - cashmere matt



ESTRA 5 - vintage oak



DECORS

DRE CELL	white matt	light gray matt	warm gray matt	cashmere matt	sage oak (textured)	sage matt	dark olive matt
	dark blue matt	black matt 2	premium natur oak	evoke oak	vintage oak		
3D	grand oak	elm	Polish oak 3D				

STANDARD OPTIONS

- stiles made of wood-based panels
- MAT DRE 4 mm glass pane
- 16mm flat panels
- Estra 7-9 models have black glass pane frame and black muntin frame
- Estra 10 model with a mirror
- Estra 12-14 models have a glazing bar in the color of the door leaf

OPTIONS WITHOUT EXTRA CHARGE

- glass pane DECORMAT BROWN, DECORMAT GRAPHITE and transparent glass pane
- holes for ventilation sleeves

REBATED DOOR LEAF

- straight edge
- 3 silver screw-in pivot hinges
- single-point mortise simple key lock, bathroom lock, cylinder lock or economic lock

NON-REBATED HINGED DOOR LEAF (extra charge)

- edge whitout rebate
- sockets for 2 recessed Estetic 80 hinges (hinges constitute a part of the door frame)
- magnetic/mechanical lock with a simple key, bathroom lock, cylinder lock or economic lock

DOOR LEAF WITH INVERTED REBATE (extra charge)

- active single door leaf
- straight edge
- sockets for two recessed Estetic 1821 hinges (hinges constitute a part of the door frame)
- magnetic simple key lock, bathroom lock, cylinder lock or economic lock

NOTE: Option available only for matt foil decors and vintage oak, evoke oak, premium natural oak in the standard height of 2043

SLIDING DOOR LEAF

- edge whitout rebate
- socket for hook lock and/or for handles

OPTIONS AVAILABLE WITH EXTRA CHARGE

- plastic ventilation sleeves 1 szt.
- non-rebated door leaf
- door leaves "90" and "100" standard height 2043
- door leaves "90" and "100" standard height 2110, 2240
- ventilation undercut
- recuperative shortcut -8mm
- door leaf with inverted rebate
- cover strip for double non-rebated door leaf
- black fittings for rebated door leaf
- adjustable hinge for rebated door leaf set.
- double leaf door door leaf price x2

NOTE: third Estetic 80 hinge for non-rebated doors (extra charge is added to the price of the door frame)

NOTE: Third hinge Estetic 1821 for doors with inverted rebate (extra charge is added to the price of the door frame)

NOTE: It is required to use door frame equipped with 3 hinges together with rebated door leaf ESTRA .

NOTE: Selected configurations of ESTRA 5 model are available from stock, in rebated and non-rebated option in white matt.

NOTE: Details and technical drawings of ESTRA 10 model with mirror can be found in the catalogue on page 182 .

ESTRA MODELS



ESTRA 1



ESTRA 2



ESTRA 3



ESTRA 4



ESTRA 5



ESTRA 6



ESTRA 7



ESTRA 8



ESTRA 9



ESTRA 10
mirror



ESTRA 11



ESTRA 12



ESTRA 13



ESTRA 14

NESTOR



NESTOR 1 - black matt 2

DECORS

DRE CELL	White matt	light gray matt	warm gray matt	cashmere matt	sage oak (textured)	sage matt	dark olive matt
	White pine	siberian elm	sand elm	vintage elm	caramel walnut	anthracite elm	dark blue matt
	black matt 2						
3D	Polish oak 3D						



NESTOR 10 - warm grey matt



NESTOR

REBATED, NON-REBATED, WITH INVERTED REBATED DOOR LEAVES

interior doors

STANDARD OPTIONS

- stiles made of wood-based panels
- MAT DRE 4 mm glass pane
- profiled 19mm MDF panels

REBATED DOOR LEAF

- straight edge
- 3 silver screw-in pivot hinges
- single-point mortise simple key lock, bathroom lock, cylinder lock or economic lock

NON-REBATED OPENING DOOR LEAF (extra charge)

- edge without rebate
- sockets for 2 hidden concealed Estetic 80 hinges (non-rebated door frames are equipped with hinges)
- magnetic/mechanical lock for a simple key, bathroom lock, cylinder lock or economic lock in steel and black color or magnetic in white, gold color - to choose from

SLIDING DOOR LEAF

- edge without rebate
- socket for hook lock and/or for handles

DOOR LEAF WITH INVERTED REBATE (extra charge)

- active single door leaf
- straight edge
- sockets for two recessed Estetic 1821 hinges (hinges constitute a part of the door frame)
- magnetic lock for a simple key, bathroom lock, cylinder lock or economy lock in steel, black, white, gold - to choose from

NOTE: This option is available only for matt foil decors

OPTIONS WITHOUT EXTRA CHARGE

- glass pane DECORMAT BROWN, DECORMAT GRAPHITE and transparent glass pane
- holes for ventilation sleeves

OPTIONS AVAILABLE WITH EXTRA CHARGE

- plastic ventilation sleeves 1 szt.
- non-rebated door leaf
- door leaf "90" and "100"
- ventilation undercut
- recuperative shortcut -8mm
- door leaf with inverted rebate
- cover strip for double non-rebated door leaf
- black fittings for rebated door leaf
- adjustable hinge for rebated door leaf set.
- double leaf door door leaf price x2

NOTE: third Estetic 80 hinge for non-rebated doors (extra charge is added to the price of the door frame)

NOTE: Third hinge Estetic 1821 for doors with inverted rebate (extra charge is added to the price of the door frame)

NOTE: It is required to use together with NESTOR rebated door leaf model door frames equipped with 3 hinges.

NESTOR MODELS



AURI



AURI 8 - natur premium oak



AURI 4 - dark olive matt

DECORS

DRE CELL 1st gr.	white (textured)	White matt	White pine	siberian elm	sand elm	vintage elm	premium natur oak
	marrone chestnut textured	evoke oak	caramel walnut	anthracite elm	black matt 2		
DRE CELL 2nd gr.	light gray matt	warm gray matt	cashmere matt	sage oak (textured)	sage matt	dark olive matt	dark blue matt
3D	grand oak	elm	Polish oak 3D				



STANDARD OPTIONS

- stiles made of wood-based panels
- MAT DRE 4 mm glass pane
- flat inserts (AURI 6-8)

REBATED DOOR LEAF

- straight edge
- 3 silver screw-in pivot hinges
- single-point mortise simple key lock, bathroom lock, cylinder lock or economic lock

NON-REBATED OPENING DOOR LEAF (extra charge)

- edge whitout rebate
- sockets for 2 recessed Estetic 80 hinges (hinges constitute a part of the door frame)
- magnetic/mechanical lock with simple key, bathroom lock, cylinder lock or economy lock

SLIDING DOOR LEAF

- edge whitout rebate
- socket for hook lock and/or for handles

DOOR LEAF WITH INVERTED REBATE (extra charge)

- active single door leaf
- straight edge
- sockets for two recessed Estetic 1821 hinges (hinges constitute a part of the door frame)
- magnetic simple key lock, bathroom lock, cylinder lock or economic lock

NOTE: Option available only for matt foil decors and vintage oak, evoke oak, premium natural oak in the standard height of 2043

OPTIONS WITHOUT EXTRA CHARGE

- glass pane DECORMAT BROWN, DECORMAT GRAPHITE and transparent glass pane
- holes for ventilation sleeves

OPTIONS AVAILABLE WITH EXTRA CHARGE

- plastic ventilation sleeves 1 szt.
- non-rebated door leaf
- door leaf "90" and "100"
- ventilation undercut
- recuperative shortcut -8mm
- cover strip for double non-rebated door leaf
- door leaf with inverted rebate
- black VSG 22.1 safety glass
- AURI 0
- AURI 1
- AURI 2, 5
- AURI 3
- AURI 4
- AURI 6
- AURI 8
- black fittings for rebated door leaf
- adjustable hinge for rebated door leaf set.
- double leaf door door leaf price x2

NOTE: Third Estetic 80 hinge for non-rebated doors (extra charge is added to the price of the door frame)

NOTE: Third hinge Estetic 1821 for doors with inverted rebate (extra charge is added to the price of the door frame)

NOTE: Selected configurations of AURI 0 rebated model in the evoke oak colour are available from stock.

NOTE: There is possibility to make rebated "40" side panels. It is required to use door frame equipped with 3 hinges together with AURI rebated door leaf model.

AURI MODELS



AURI 0



AURI 1



AURI 2



AURI 3



AURI 4



AURI 5



AURI 6
1 glass pane, 4
inserts in the color
of the door leaf



AURI 7
inserts in the colour
of the door leaf



AURI 8
2 glass panes, 3 inserts
in the color of the
leaf

REVA



REVA 1 -vintage oak



REVA 1 - natur premium oak

DECORS

DRE CELL 1st gr.	white (textured)	White matt	White pine	siberian elm	sand elm	vintage elm	premium natur oak
	marrone chestnut textured	evoke oak	caramel walnut	anthracite elm	black matt 2		
DRE CELL 2nd gr.	light gray matt	warm gray matt	cashmere matt	sage oak (textured)	sage matt	dark olive matt	dark blue matt
3D	grand oak	elm	Polish oak 3D				



STANDARD OPTIONS

- stiles made of wood-based panels
- MAT DRE 4 mm glass pane
- flat inserts (REVA 5-7)

REBATED DOOR LEAF

- straight edge
- 3 silver screw-in pivot hinges
- single-point mortise simple key lock, bathroom lock, cylinder lock or economic lock

NON-REBATED OPENING DOOR LEAF (extra charge)

- edge whitout rebate
- sockets for 2 hidden concealed Estetic 80 hinges (non-rebated door frames are equipped with hinges)
- magnetic/mechanical lock with a simple key, bathroom lock, cylinder lock or economic lock

SLIDING DOOR LEAF

- edge whitout rebate
- socket for hook lock and/or for handles

DOOR LEAF WITH INVERTED REBATE (extra charge)

- active single door leaf
- straight edge
- sockets for two recessed Estetic 1821 hinges (hinges constitute a part of the door frame)
- magnetic simple key lock, bathroom lock, cylinder lock or economic lock

NOTE: Option available only for matt foil decors and vintage oak, evoke oak, premium natural oak in the standard height of 2043

OPTIONS WITHOUT EXTRA CHARGE

- glass pane DECORMAT BROWN, DECORMAT GRAPHITE and transparent glass pane
- holes for ventilation sleeves

OPTIONS AVAILABLE WITH EXTRA CHARGE

- plastic ventilation sleeves 1 szt.
- non-rebated door leaf
- door leaf "90" and "100"
- ventilation undercut
- recuperative shortcut -8mm
- cover strip for double non-rebated door leaf
- door leaf with inverted rebate
- black VSG 22.1 safety glass
- REVA 1
- REVA 2
- REVA 3.4
- REVA 5
- REVA 7
- black fittings for rebated door leaf
- adjustable hinge for rebated door leaf set.
- double leaf door door leaf price x2

NOTE: Third Estetic 80 hinge for non-rebated doors (extra charge is added to the price of the door frame)

NOTE: Third hinge Estetic 1821 for doors with inverted rebate (extra charge is added to the price of the door frame)

NOTE: There is possibility to make rebated "40" side panels.
NOTE: It is required to use door frame equipped with 3 hinges together with REVA rebated door leaf model.

REVA MODELS



REVA 1



REVA 2



REVA 3



REVA 4



REVA 5
1 glass pane, 5
inserts in the colour
of the door leaf



REVA 6
inserts in the color
of the door leaf



REVA 7
2 glass panes, 4
inserts in the color
of the door leaf

VERSO



VERSO 0 - white pine



VERSO 3 - white matt

DECORS

DRE CELL	White matt	White pine
----------	---------------	---------------



VERSO

VERSO

REBATED, NON-REBATED DOOR LEAVES

interior doors

STANDARD OPTIONS

- stiles made of wood-based panels
- MAT DRE 4 mm glass pane

OPTIONS WITHOUT EXTRA CHARGE

- glass pane DECORMAT BROWN, DECORMAT GRAPHITE and transparent glass pane
- holes for ventilation sleeves

REBATED DOOR LEAF

- straight edge
- 3 silver screw-in pivot hinges
- single-point mortise simple key lock, bathroom lock, cylinder lock or economic lock

NON-REBATED OPENING DOOR LEAF (extra charge)

- edge whitout rebate
- sockets for 2 recessed Estetic 80 hinges (hinges constitute a part of the door frame)
- magnetic/mechanical lock with a simple key, bathroom lock, cylinder lock or economic lock

SLIDING DOOR LEAF

- edge whitout rebate
- socket for hook lock and/or for handles


OPTIONS AVAILABLE WITH EXTRA CHARGE

- plastic ventilation sleeves 1 szt.
- non-rebated door leaf
- door leaf "90" and "100"
- ventilation undercut
- recuperative shortcut -8mm
- cover strip for double non-rebated door leaf
- black fittings for rebated door leaf
- adjustable hinge for rebated door leaf set.
- double leaf door door leaf price x2

NOTE: Third Estetic 80 hinge for non-rebated doors (extra charge is added to the price of the door frame)

NOTE: Selected configurations of VERSO 0 rebated model in white matt are available from stock.

VERSO MODELS

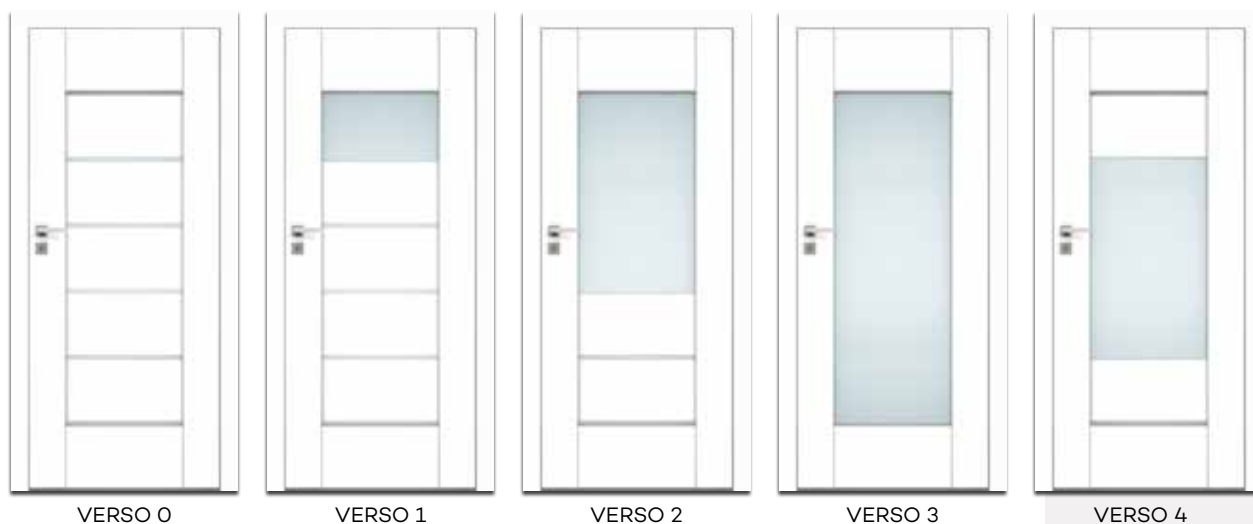

FOSCA



FOSCA 0 - grand oak



FOSCA 6 - grand oak

DECORS

DRE CELL	white (textured)	White matt	White pine	siberian elm	sand oak	premium natur oak	vintage oak
	marrone chestnut textured	evoke oak	caramel walnut	anthracite elm	black matt 2	light gray matt	
3D	grand oak	elm	Polish oak 3D				



STANDARD OPTIONS

- stiles made of wood-based panels
- MAT DRE 4 mm glass pane
- flat panel insert coated with silver laminate (FOSCA 1-3) or in door leaf colour (FOSCA 4-6)

OPTION WITHOUT EXTRA CHARGE

- glass pane DECORMAT BROWN, DECORMAT GRAPHITE and transparent glass pane
- holes for ventilation sleeves

REBATED DOOR LEAF

- straight edge
- 3 silver screw-in pivot hinges
- single-point mortise simple key lock, bathroom lock, cylinder lock or economic lock

NON-REBATED OPENING DOOR LEAF (extra charge)

- edge whitout rebate
- sockets for 2 recessed Estetic 80 hinges (hinges constitute a part of the door frame)
- magnetic simple key lock, bathroom lock, cylinder lock or economic lock

SLIDING SYSTEM DOOR LEAF

- edge whitout rebate
- socket for hook lock and/or for handles

OPTIONS AVAILABLE WITH EXTRA CHARGE

- plastic ventilation sleeves 1 szt.
- non-rebated door leaf
- door leaf "90" and "100"
- ventilation undercut
- recuperative shortcut -8mm
- cover strip for double non-rebated door leaf
- adjustable hinge for rebated door leaf set.
- double leaf door door leaf price x2

NOTE: Third Estetic 80 hinge for non-rebated doors (extra charge is added to the price of the door frame)

NOTE: There is possibility to make rebated „40" side panels.

NOTE: It is required to use door frame equipped with 3 hinges together with FOSCA rebated door leaf model.

FOSCA MODELS



FOSCA 0
5 pcs. of panes



FOSCA 1
3 pcs. of panes,
2 pcs. of HDF panels



FOSCA 2
1 pc. of glass,
4 pcs. of HDF panels



FOSCA 3
5 pcs. of HDF panels



FOSCA 4
3 pcs. of panes,
2 pcs. of HDF panels



FOSCA 5
1 pc. of glass,
4 pcs. of HDF panels



FOSCA 6
5 pcs. of HDF panels



FOSCA 1-3
(4mm HDF insert
coated with silver
laminate)



FOSCA 4-6
(4mm HDF insert
coated in door leaf
colour)

PREMIUM



PREMIUM O, side panel - vintage oak



PREMIUM O - natur premium oak

DECORS

DRE CELL	white (textured)	White matt	White pine	siberian elm	sand oak	premium natur oak	vintage oak
	marrone chestnut textured	evoke oak	caramel walnut	anthracite elm	black matt 2	light gray matt	
3D	grand oak	elm	Polish oak 3D				



PREMIUM

REBATED, NON-REBATED, WITH INVERTED REBATED DOOR LEAVES

interior doors

STANDARD OPTIONS

- stiles made of wood-based panels
- MAT DRE 4 mm glass pane

OPTION WITHOUT EXTRA CHARGE

- glass pane DECORMAT BROWN, DECORMAT GRAPHITE and transparent glass pane
- holes for ventilation sleeves

REBATED DOOR LEAF

- straight edge
- 3 silver screw-in pivot hinges
- single-point mortise simple key lock, bathroom lock, cylinder lock or economic lock

NON-REBATED OPENING DOOR LEAF (extra charge)

- edge whitout rebate
- sockets for 2 recessed Estetic 80 hinges (hinges constitute a part of the door frame)
- magnetic/mechanical lock with simple key, bathroom lock, cylinder lock or economy lock

SLIDING SYSTEM DOOR LEAF

- edge whitout rebate
- socket for hook lock and/or for handles

NOTE: There is possibility to make rebated „40” side panels.

NOTE: It is required to use door frame equipped with 3 hinges together with PREMIUM rebated door leaf model.

DOOR LEAF WITH INVERTED REBATE (extra charge)

- active single door leaf
- straight edge
- sockets for two recessed Estetic 1821 hinges (hinges constitute a part of the door frame)
- magnetic simple key lock, bathroom lock, cylinder lock or economic lock

NOTE: Option available only for matt foil decors and vintage oak, evoke oak, premium natural oak in the standard height of 2043

OPTIONS AVAILABLE WITH EXTRA CHARGE

- plastic ventilation sleeves 1 szt.
- non-rebated door leaf
- door leaf "90" and "100"
- ventilation undercut
- recuperative shortcut -8mm
- cover strip for double non-rebated door leaf
- door leaf with inverted rebate
- black fittings for rebated door leaf
- adjustable hinge for rebated door leaf set.
- double leaf door door leaf price x2

NOTE: Third Estetic 80 hinge for non-rebated doors (extra charge is added to the price of the door frame)

NOTE: Third hinge Estetic 1821 for doors with inverted rebate (extra charge is added to the price of the door frame)

PREMIUM MODELS



PREMIUM 0
PREMIUM 4*
PREMIUM 8**



PREMIUM 1
PREMIUM 5*
PREMIUM 9**



PREMIUM 2
PREMIUM 6*
PREMIUM 10**



PREMIUM 3
PREMIUM 7*
PREMIUM 11**



PREMIUM 12
2 glass panes, 6
inserts in the colour
of the door leaf



PREMIUM 13
2 glass panes, 6
inserts coated with
a silver laminate

In PREMIUM 12 and 13 models, from the top edge there are used two glass panes.



PREMIUM 0-3
(4 mm glass pane)



* PREMIUM 4-7, 12
(4 mm HDF inserts in
door leaf colour)



** PREMIUM 8-11, 13
(4mm HDF inserts,
coated with a silver
laminate)

PIANO



PIANO 0 - Polish oak 3D



PIANO 9 - grand oak



DECORS

DRE CELL	white (textured)	White matt	White pine	siberian elm	sand oak	premium natur oak	vintage oak
	marrone chestnut textured	evoke oak	caramel walnut	anthracite elm	black matt 2	light gray matt	
3D	grand oak	elm	Polish oak 3D				



PIANO 9-12 panel

PIANO

PIANO

REBATED, NON-REBATED DOOR LEAVES

interior doors

STANDARD OPTIONS

- stiles made of wood-based panels
- MAT DRE 4 mm glass pane
- filling with convex panel thickness 16 mm (PIANO 1-2, PIANO 5-6) or 19 mm convex panel (PIANO 9-12)

OPTION WITHOUT EXTRA CHARGE

- glass pane DECORMAT BROWN, DECORMAT GRAPHITE and transparent glass pane
- holes for ventilation sleeves

REBATED DOOR LEAF

- straight edge
- 3 silver screw-in pivot hinges
- single-point mortise simple key lock, bathroom lock, cylinder lock or economic lock

NON-REBATED OPENING DOOR LEAF (extra charge)

- edge whitout rebate
- sockets for 2 hidden concealed Estetic 80 hinges (non-rebated door frames are equipped with hinges)
- magnetic simple key lock, bathroom lock, cylinder lock or economic lock

SLIDING SYSTEM DOOR LEAF

- edge whitout rebate
- socket for hook lock and/or for handles

NOTE: There is possibility to make rebated „40“ side panels.

It is required to use door frame equipped with 3 hinges together with PIANO rebated door leaf model.

OPTIONS AVAILABLE WITH EXTRA CHARGE

- plastic ventilation sleeves 1 szt.
- non-rebated door leaf
- door leaf "90" and "100"
- ventilation undercut
- recuperative shortcut -8mm
- cover strip for double non-rebated door leaf
- adjustable hinge for rebated door leaf set.
- double leaf door door leaf price x2

NOTE: Third Estetic 80 hinge for non-rebated doors (extra charge is added to the price of the door frame)

PIANO MODELS



PIANO 0



PIANO 1



PIANO 2



PIANO 3



PIANO 4



PIANO 5



PIANO 6



PIANO 9



PIANO 10



PIANO 11



PIANO 12

SCALA



SCALA O, SCALA B2 - white matt



SCALA O - sand oak



DECORS

DRE CELL	white (textured)	White matt	White pine	siberian elm	sand oak	premium natur oak	vintage oak
	marrone chestnut textured	evoke oak	caramel walnut	anthracite elm	black matt 2	light gray matt	
3D	grand oak	elm	Polish oak 3D				

DOOR HANDLE WITH A BACKPLATE FOR

This promotion applies to rebated and non-rebated SCALA door leaves in DRE-Cell veneer and 3D foil. Available door handles models and finishes include: WEGA, ATRIA, ARCTUS, POLARIS, ORION, ZETA, AVIOR, and ALTAIR door handles, and a backplate for simple key, a cylinder lock, or a bathroom lock.
The promotion lasts while stocks last.



SCALA

SCALA

REBATED, NON-REBATED DOOR LEAVES

interior doors

STANDARD OPTIONS

- stiles made of wood-based panels
- MAT DRE 4 mm glass pane
- flat panel insert (SCALA A), 19 mm profiled MDF panels (SCALA B)

OPTIONS WITHOUT EXTRA CHARGE

- glass pane DECORMAT BROWN, DECORMAT GRAPHITE and transparent glass pane
- holes for ventilation sleeves

REBATED DOOR LEAF

- straight edge
- 3 silver screw-in pivot hinges
- single-point mortise simple key lock, bathroom lock, cylinder lock or economic lock

NON-REBATED OPENING DOOR LEAF (extra charge)

- edge whitout rebate
- sockets for 2 hidden concealed Estetic 80 hinges (non-rebated door frames are equipped with hinges)
- magnetic simple key lock, bathroom lock, cylinder lock or economic lock

SLIDING DOOR LEAF

- edge whitout rebate
- socket for hook lock and/or for handles

NOTE: Rebated "40" side panels available.

It is required to use door frame equipped with 3 hinges together with SCALA rebated door leaf model.

OPTIONS AVAILABLE WITH EXTRA CHARGE

- plastic ventilation sleeves 1 szt.
- non-rebated door leaf
- door leaf "90" and "100"
- ventilation undercut
- recuperative shortcut -8mm
- cover strip for double non-rebated door leaf
- adjustable hinge for rebated door leaf set.
- double leaf door door leaf price x2

NOTE: Third Estetic 80 hinge for non-rebated doors (extra charge is added to the price of the door frame)



panel SCALA A, A1-A7



panel SCALA B, B1-B7

SCALA MODELS



SCALA A/B



SCALA A1/B1



SCALA A2/B2



SCALA A3/B3



SCALA A4/B4



SCALA A5/B5



SCALA A6/B6



SCALA A7/B7



SCALA O

LUMIO



LUMIO 1 - alpine white

DECORS

FINISH	white alpine	bleached craft oak	riviera oak	rustic oak
--------	--------------	--------------------	-------------	------------



LUMIO 1 - bleached craft oak



STANDARD OPTIONS

- stiles made of wood-based panels
- MAT DRE 4 mm glass pane
- flat inserts (LUMIO 7-9)

OPTIONS WITHOUT EXTRA CHARGE

- glass pane DECORMAT BROWN, DECORMAT GRAPHITE and transparent glass pane
- holes for ventilation sleeves
- 4mm HDF flat panel gloss black lacquered in LUMIO 1, 7, 9 models - instead of a glass pane

REBATED DOOR LEAF

- straight edge
- 3 silver screw-in pivot hinges
- a deadbolt/mechanical lock with a simple key, bathroom lock, cylinder lock or economic lock

OPTIONS AVAILABLE WITH EXTRA CHARGE

- plastic ventilation sleeves 1 szt.
- door leaf „90” and „100”
- ventilation undercut
- recuperative shortcut -8mm
- black VSG 22.1 safety glass
- LUMIO 1
- LUMIO 2
- LUMIO 3, 6
- LUMIO 4
- LUMIO 5
- LUMIO 7
- LUMIO 9
- black fittings for rebated door leaf
- adjustable hinge for rebated door leaf set.
- double leaf door door leaf price x2

NOTE: 3 hinges door frames should be used with LUMIO rebated door leaves .

NOTE: Selected configurations of LUMIO 1 and LUMIO 9 models are available from stock in the colour alpine white.

LUMIO MODELS



LUMIO 1



LUMIO 2



LUMIO 3



LUMIO 4



LUMIO 5



LUMIO 6



LUMIO 7
1 glass pane, 4
inserts in the color
of the door leaf



LUMIO 8
inserts in the colour
of the door leaf



LUMIO 9
2 glass panes, 3
inserts in door leaf
colour

VICO



VICO 1 - bleached craft oak



VICO 4 - riviera oak

DECORS

FINISH	white alpine	bleached craft oak	riviera oak	rustic oak
--------	--------------	--------------------	-------------	------------



STANDARD OPTIONS

- stiles made of wood-based panels
- MAT DRE 4 mm glass pane
- flat inserts (VICO 5-7)

OPTIONS WITHOUT EXTRA CHARGE

- glass pane DECORMAT BROWN, DECORMAT GRAPHITE and transparent glass pane
- holes for ventilation sleeves
- 4mm HDF flat panel gloss black lacquered in VICO 1, 5, 7 models - instead of a glass pane

REBATED DOOR LEAF

- straight edge
- 3 silver screw-in pivot hinges
- a deadbolt/mechanical lock with a simple key, bathroom lock, cylinder lock or economic lock

OPTIONS AVAILABLE WITH EXTRA CHARGE

- plastic ventilation sleeves 1 szt.
- door leaf „90” and „100”
- ventilation undercut
- recuperative shortcut -8mm
- black VSG 22.1 safety glass
- VICO 1
- VICO 2
- VICO 3.4
- VICO 5
- VICO 7
- black fittings for rebated door leaf
- adjustable hinge for rebated door leaf set.
- double leaf door door leaf price x2

NOTE: 3 hinges door frames should be used with rebated door leaves VICO .

VICO MODELS



VICO 1



VICO 2



VICO 3



VICO 4



VICO 5
1 glass pane, 5
inserts in the colour
of the door leaf



VICO 6
inserts in the colour
of the door leaf



VICO 7
2 pcs. of panes, 4 pcs.
of inserts in the colo-
ur of the door leaf

TRIESTA



TRIESTA 0 - evoke oak



TRIESTA 2 - Siberian elm

DECORS

DRE CELL	white (textured)	White pine	siberian elm	sand elm	vintage elm
	marrone chestnut textured	evoke oak	caramel walnut	anthracite elm	

TRIESTA

REBATED, NON-REBATED DOOR LEAVES
interior doors

STANDARD OPTIONS

- stiles made of wood-based panels
- MAT DRE 4 mm glass pane

REBATED DOOR LEAF

- straight edge
- 3 silver screw-in pivot hinges
- single-point mortise simple key lock, bathroom lock, cylinder lock or economic lock

NON-REBATED OPENING DOOR LEAF (extra charge)

- edge whitout rebate
- sockets for 2 hidden concealed Estetic 80 hinges (non-rebated door frames are equipped with hinges)
- magnetic simple key lock, bathroom lock, cylinder lock or economic lock

SLIDING DOOR LEAF

- edge whitout rebate
- socket for hook lock and/or for handles

OPTION WITHOUT ADDITIONAL CHARGE

- glass pane DECORMAT BROWN, DECORMAT GRAPHITE and transparent glass pane
- holes for ventilation sleeves

OPTIONS AVAILABLE WITH EXTRA CHARGE

- plastic ventilation sleeves 1 szt.
- non-rebated door leaf
- door leaf "90" and "100"
- ventilation undercut
- recuperative shortcut -8mm
- cover strip for double non-rebated door leaf
- adjustable hinge for rebated door leaf set.
- double leaf door door leaf price x2

NOTE: Third Estetic 80 hinge for non-rebated doors (extra charge is added to the price of the door frame)

NOTE: For TRIESTA rebated door leaves, door frames with 3 hinges should be used.

TRIESTA MODELS



TRIESTA 0



TRIESTA 1



TRIESTA 2



TRIESTA 3

ENA



ENA 1, ENA 4 - sand oak



ENA 0 - vintage oak

DECORS

DRE CELL	white (textured)	White matt	White pine	siberian elm	sand elm	vintage elm
	marrone chestnut textured	evoke oak	caramel walnut	anthracite elm	black matt 2	light gray matt
3D	grand oak	elm	Polish oak 3D			



STANDARD OPTIONS

- stiles made of wood-based panels
- MAT DRE 4 mm glass pane

OPTIONS WITHOUT EXTRA CHARGE

- glass pane DECORMAT BROWN, DECORMAT GRAPHITE and transparent glass pane
- holes for ventilation sleeves

REBATED DOOR LEAF

- straight edge
- 3 silver screw-in pivot hinges
- single-point mortise simple key lock, bathroom lock, cylinder lock or economic lock

NON-REBATED OPENING DOOR LEAF (extra charge)

- edge whitout rebate
- sockets for 2 recessed Estetic 80 hinges (hinges constitute a part of the door frame)
- magnetic simple key lock, bathroom lock, cylinder lock or economic lock

SLIDING DOOR LEAF

- edge whitout rebate
- socket for hook lock and/or for handles

OPTIONS AVAILABLE WITH EXTRA CHARGE

- plastic ventilation sleeves 1 szt.
- non-rebated door leaf
- door leaf "90" and "100"
- ventilation undercut
- recuperative shortcut -8mm
- cover strip for double non-rebated door leaf
- adjustable hinge for rebated door leaf set.
- double leaf door door leaf price x2

NOTE: Third Estetic 80 hinge for non-rebated doors (extra charge is added to the price of the door frame)

NOTE: It is required to use door frames equipped with 3 hinges together with ENA rebated door leaf model .

ENA MODELS



ENA 0



ENA 1



ENA 2



ENA 3



ENA 4



ENA 5



OTTO 4 - warm grey



OTTO 4 - sage matt

DECORS

DRE CELL	white mat	light gray matt	warm gray matt	cashmere matt	sage matt	dark olive matt	dark blue matt
black matt 2							



STANDARD OPTIONS

- external frames made of MDF boards
- internal frame made of plywood and MDF boards with tubular chipboard filling
- glass pane MAT DRE 4 mm thick

NON-REBATED OPENING DOOR LEAF

- edge whitout rebate
- sockets for 2 recessed Estetic 80 hinges (hinges constitute a part of the door frame)
- magnetic simple key lock, bathroom lock, cylinder lock or economic lock

SLIDING DOOR LEAF

- edge whitout rebate
- socket for hook lock and/or for handles

OPTION WITHOUT ADDITIONAL CHARGE

- transparent glass
- holes for ventilation sleeves

OPTIONS AVAILABLE WITH EXTRA CHARGE

- plastic ventilation sleeves 1 szt.
 - door leaf „90” and „100”
 - ventilation undercut
 - recuperative shortcut -8mm
 - cover strip for double non-rebated door leaf
 - double leaf door door leaf price x2
- NOTE:** Third Estetic 80 hinge for non-rebated doors (extra charge is added to the price of the door frame)

OTTO MODELS



OTTO 1
cashmere matt



OTTO 2
cashmere matt



OTTO 3
cashmere matt



OTTO 4
cashmere matt

VOLTA



VOLTA 8 - warm grey matt

DECORS

DRE CELL	white matt	light gray matt	warm gray matt	cashmere matt	sage matt	dark olive matt	dark blue matt
	black matt 2						



VOLTA 2 - sage matt



Magnetic lock and Factor handrail



30mm muntin



VOLTA

VOLTA

NON-REBATED DOOR LEAVES

interior doors

NEW

STANDARD OPTIONS

- MDF frame, 80 mm rail
- 6 mm thick laminated glass, transparent or white frost
- 6 mm thick tempered glass with grooves available for models 1-3, 6-8
- holes for mounting a handrail (you need to buy a handrail separately – choose Factor or Nomi)

NON-REBATED OPENING DOOR LEAF

- edge whitout rebate
- sockets for 2 recessed Estetic 80 hinges (hinges constitute a part of the door frame)
- magnetic lock
- no locking option for simple key, lock, toilet

PASSIVE NON-REBATED DOOR LEAF - side doors "40"

- edge whitout rebate
- sockets for 2 recessed Estetic 80 hinges (hinges constitute a part of the door frame)
- latch strike plate
- two cantilevers
- no locking option for simple key, cylinder, toilet

NOTE: The double-leaf option does not close mechanically, permanently. The leaves are held together solely by the force of a magnet.

EXTRA CHARGE OPTIONS

- door leaf „100"
- black, white Factor handle
- black Nomi handrail
- non-rebated double door closing strip for non-rebated door leaves
- the price of double-leaf doors x 2

NOTE: Third Estetic 80 hinge for non-rebated doors (extra charge is added to the price of the door frame)

NOTE: There is no possibility to shorten door leaf.



Factor black handle



Factor white handle



Nomi handrail

VOLTA MODELS



VOLTA 1



VOLTA 2



VOLTA 3



VOLTA 4



VOLTA 5



VOLTA 6



VOLTA 7



VOLTA 8



passive doors as side doors "40"
Matching Volta 1-8 patterns, only horizontal slats

Door leaf width: single leaf "60"÷"100", double leaf non-rebated "100"÷"140".

Technical information: door frames: pp. 142-167, accessories: pp. 168-176 and 181, door leaves: pp. 182-195.

VETRO D1



VETRO D1 - natur premium oak



VETRO D1 - grand oak

DECORS

DRE CELL	white (textured)	White matt	White pine	siberian elm	sand oak	premium natur oak	vintage oak
	marrone chestnut textured	evoke oak	caramel walnut	anthracite elm	black matt 2	light gray matt	
3D	grand oak	elm	Polish oak 3D				

ventilation undercut



VETRO D1

REBATED, NON-REBATED DOOR LEAVES
interior doors

STANDARD OPTIONS

- reinforced MDF frame: narrow element with fixed width, wide element with variable width
- core made of tubular chipboard
- 8 mm tempered glass with fixed width, (regardless of the door leaf width)

OPTIONS WITHOUT EXTRA CHARGE

- door leaf with revers positioning of glass pane

OPTIONS AVAILABLE WITH EXTRA CHARGE

- ventilation undercut
- black tempered laminated glass pane
- adjustable hinge for rebated door leaf set.

REBATED DOOR LEAF

- R5 edge
- 3 silver screw-in pivot hinges
- single-point mortise simple key lock, bathroom lock, cylinder lock or economic lock

NON-REBATED OPENING DOOR LEAF (extra charge) ONLY

WHITE MATT

- edge whitout rebate
- sockets for 2 hidden concealed Estetic 80 hinges (non-rebated door frames are equipped with hinges)
- magnetic simple key lock, bathroom lock, cylinder lock or economic lock
- non-rebated door leaf

NOTE: Third Estetic 80 hinge for non-rebated doors (extra charge is added to the price of the door frame)

SLIDING DOOR LEAF

- edge whitout rebate
- socket for hook lock and/or for handles

NOTE: VETRO D sliding door leaves do not fit sliding system with PLUS door frame cassette.

NOTE: There is no possibility to shorten door leaf.

VETRO D – meets ventilation requirements for widths "80" - "100" with ventilation undercut.

NOTE: It is required to use door frame equipped with 3 hinges together with VETRO rebated door leaf model.

VETRO D1 MODELS



VETRO D1
transparent glass



VETRO D1
decormat



VETRO D1
decormat brown



VETRO D1
decormat graphite

BERGE



BERGE 5 - ashen



BERGE 6 - white

DECORS

PAINTED	white	cashmere	latte	ashen
---------	-------	----------	-------	-------

white - UV Premium acrylic varnish - RAL 9003
Cashmere - Premium UV Acrylic Varnish - NCS S2002-Y50R
Latte - Premium UV Acrylic Varnish - Flugger 4362, NCS S1505-Y50R
ashen - Premium UV acrylic varnish - RAL 7035

STANDARD OPTIONS

- door leaf painted with Premium UV acrylic varnish
- stiles made of wood-based panels
- MAT DRE 4 mm glass pane
- profiled 19mm MDF panels

OPTIONS WITHOUT EXTRA CHARGE

- glass pane DECORMAT BROWN, DECORMAT GRAPHITE and transparent glass pane
- holes for ventilation sleeves

REBATED DOOR LEAF

- straight edge
- 3 silver screw-in pivot hinges
- single-point mortise simple key lock, bathroom lock, cylinder lock or economic lock

NON-REBATED OPENING DOOR LEAF (extra charge)

- edge whitout rebate
- sockets for 2 hidden concealed Estetic 80 hinges (non-rebated door frames are equipped with hinges)
- magnetic/mechanical lock for simple key, bathroom lock, cylinder lock or economic lock in steel and black color or magnetic in white color - to choose from

SLIDING DOOR LEAF

- edge whitout rebate
- socket for hook lock and/or for handles

OPTIONS AVAILABLE WITH EXTRA CHARGE

- plastic ventilation sleeves 1 szt.
- non-rebated door leaf
- door leaf "90" and "100"
- ventilation undercut
- recuperative shortcut -8mm
- cover strip for double non-rebated door leaf
- black fittings for rebated door leaf
- adjustable hinge for rebated door leaf set.
- double leaf door door leaf price x2

NOTE: It is required to use door frame equipped with 3 hinges together with BERGE rebated door leaf model .

NOTE: Third Estetic 80 hinge for non-rebated doors (extra charge is added to the price of the door frame)

To ensure the highest quality of painted products, before painting process, both, door leaf and door frames are coated with special material which constitutes solid base.

BERGE MODELS



BERGE 1

BERGE 2

BERGE 3

BERGE 4

BERGE 5

BERGE 6

BERGE 7

EVEN



EVEN 0 - white



EVEN 2 - latte



DECORS

PAINTED	white	cashmere	latte	ashen
---------	-------	----------	-------	-------

white - UV Premium acrylic varnish - RAL 9003
Cashmere - Premium UV Acrylic Varnish - NCS S2002-Y50R
Latte - Premium UV Acrylic Varnish - Flugger 4362, NCS S1505-Y50R
ashen - Premium UV acrylic varnish - RAL 7035

EVEN

EVEN

REBATED AND NON-REBATED DOOR LEAVES
interior doors

STANDARD OPTIONS

- door leaf painted with Premium UV acrylic varnish
- stiles made of wood-based panels
- MAT DRE 4 mm glass pane

OPTIONS WITHOUT EXTRA CHARGE

- glass pane DECORMAT BROWN, DECORMAT GRAPHITE and transparent glass pane
- holes for ventilation sleeves

REBATED DOOR LEAF

- straight edge
- 3 silver screw-in pivot hinges
- single-point mortise simple key lock, bathroom lock, cylinder lock or economic lock

NON-REBATED OPENING DOOR LEAF (extra charge)

- edge whitout rebate
- sockets for 2 hidden concealed Estetic 80 hinges (non-rebated door frames are equipped with hinges)
- magnetic simple key lock, bathroom lock, cylinder insert lock or economic lock in steel, black or white color

SLIDING DOOR LEAF

- edge whitout rebate
- socket for hook lock and/or for handles

OPTIONS AVAILABLE WITH EXTRA CHARGE

- plastic ventilation sleeves 1 szt.
- non-rebated door leaf
- door leaf "90" and "100"
- ventilation undercut
- recuperative shortcut -8mm
- cover strip for double non-rebated door leaf
- adjustable hinge for rebated door leaf set.
- double leaf door door leaf price x2

NOTE: Third Estetic 80 hinge for non-rebated doors (extra charge is added to the price of the door frame)

NOTE: It is required to use door frame equipped with 3 hinges together with rebated door leaf.

To ensure the highest quality of painted products, before painting process, both, door leaf and door frames are coated with special material which constitutes solid base.

EVEN MODELS



EVEN 0



EVEN 1



EVEN 2



EVEN 3



EVEN 4



EVEN 5
2 glass panes, 4
inserts in the color
of the door leaf



EVEN 6
inserts in the colour
of the door leaf

NESTOR



NESTOR 12 - white



NESTOR 10 - cashmere

DECORS

PAINTED	white	cashmere	latte	ashen
---------	-------	----------	-------	-------

white - UV Premium acrylic varnish - RAL 9003
Cashmere - Premium UV Acrylic Varnish - NCS S2002-Y50R
Latte - Premium UV Acrylic Varnish - Flugger 4362, NCS S1505-Y50R
ashen - Premium UV acrylic varnish - RAL 7035



NESTOR

REBATED AND NON-REBATED DOOR LEAVES, WITH INVERTED REBATED

interior doors

STANDARD OPTIONS

- door leaf painted with Premium UV acrylic varnish
- stiles made of wood-based panels
- MAT DRE 4 mm glass pane
- profiled 19mm MDF panels

OPTIONS WITHOUT EXTRA CHARGE

- glass pane DECORMAT BROWN, DECORMAT GRAPHITE and transparent glass pane
- holes for ventilation sleeves

REBATED DOOR LEAF

- straight edge
- 3 silver screw-in pivot hinges
- single-point mortise simple key lock, bathroom lock, cylinder lock or economic lock

NON-REBATED OPENING DOOR LEAF (extra charge)

- edge whitout rebate
- sockets for 2 hidden concealed Estetic 80 hinges (non-rebated door frames are equipped with hinges)
- magnetic/mechanical lock for a simple key, bathroom lock, cylinder lock or economic lock in steel and black color or magnetic in white, gold color - to choose from

SLIDING DOOR LEAF

- edge whitout rebate
- socket for hook lock and/or for handles

DOOR LEAF WITH INVERTED REBATE (extra charge)

- active single door leaf
- straight edge
- sockets for two recessed Estetic 1821 hinges (hinges constitute a part of the door frame)
- magnetic lock for a simple key, bathroom lock, cylinder lock or economy lock in steel, black, white, gold - to choose from

OPTIONS AVAILABLE WITH EXTRA CHARGE

- plastic ventilation sleeves 1 szt.
- non-rebated door leaf
- door leaf "90" and "100"
- ventilation undercut
- recuperative shortcut -8mm
- door leaf with inverted rebate
- cover strip for double non-rebated door leaf
- black fittings for rebated door leaf
- adjustable hinge for rebated door leaf set.
- double leaf door door leaf price x2

NOTE: third Estetic 80 hinge for non-rebated doors (extra charge is added to the price of the door frame)

NOTE: Third hinge Estetic 1821 for doors with inverted rebate (extra charge is added to the price of the door frame)

NOTE: It is required to use together with NESTOR rebated door leaf model door frames equipped with 3 hinges.

To ensure the highest quality of painted products, before painting process, both, door leaf and door frames are coated with special material which constitutes solid base.

NESTOR MODELS



VETRO E



VETRO E - latte



VETRO E - cashmere, black laminated glass



DECORS

PAINTED	white	cashmere	latte	ashen
---------	-------	----------	-------	-------

white - UV Premium acrylic varnish - RAL 9003
Cashmere - Premium UV Acrylic Varnish - NCS S2002-Y50R
Latte - Premium UV Acrylic Varnish - Flugger 4362, NCS S1505-Y50R
ashen - Premium UV acrylic varnish - RAL 7035

VETRO E

REBATED AND NON-REBATED DOOR LEAVES
interior doors

STANDARD OPTIONS

- door leaf painted with Premium UV acrylic varnish
- reinforced MDF frame: narrow element with fixed width, wide element with variable width
- core made of tubular chipboard
- DECORMAT tempered laminated 8 mm glass pane with fixed width (regardless the width of the door leaf) or laminated black tempered 8 mm glass pane (opaque) with fixed width (regardless the door leaf width)

REBATED DOOR LEAF

- straight edge
- 3 silver screw-in pivot hinges
- single-point mortise simple key lock, bathroom lock, cylinder lock or economic lock

NON-REBATED DOOR LEAF (EXTRA CHARGE)

- edge whitout rebate
- sockets for 2 hidden concealed Estetic 80 hinges (non-rebated door frames are equipped with hinges)
- magnetic simple key lock, bathroom lock, cylinder insert lock or economic lock in steel, black or white color

SLIDING DOOR LEAF

- edge whitout rebate
- socket for hook lock and/or for handles

OPTIONS AVAILABLE WITH EXTRA CHARGE

- ventilation undercut
 - non-rebated door leaf
 - black fittings for rebated door leaf
 - adjustable hinge for rebated door leaf set.
- NOTE:** Third Estetic 80 hinge for non-rebated doors (extra charge is added to the price of the door frame)

NOTE: sliding VETRO E door leaves do not fit the sliding system with PLUS door frame cassette.

NOTE: There is no possibility to shorten door leaf.

VETRO E – meets ventilation requirements for widths "80" - "100" with ventilation undercut

NOTE: It is required to use together with VETRO rebated door leaf model door frames equipped with 3 hinges.

To ensure the highest quality of painted products, before painting process, both, door leaf and door frames are coated with special material which constitutes solid base.

VETRO E MODELS



VETRO E
white (black glass)



VETRO E
cashmere (black glass)



VETRO E
latte (DECORMAT glass)



VETRO E
ashen (DECORMAT glass)

FLUSH DOORS



Flush doors are covered with foils, laminates or acrylic lacquers. They combine aesthetics, durability and wide personalization possibilities, while being economical and functional solution.



UNI 10 - White Premium UV Acrylic Varnish

NOVA



NOVA 80 - sage oak (structure), brushed gold inlay



NOVA 70 - warm grey matt

DECORS

DRE CELL	white matt	light gray matt	warm gray matt	cashmere matt	sage oak (textured)	sage matt	dark olive matt
	dark blue matt	antique copper	oxide concrete				
CPL	black ST						
Inlays	brushed steel	brushed gold	moro matt				



NOTE: the Silent package applies to rebated and non-rebated single leaf door..

STANDARD OPTIONS

- door leaf frame made of softwood
- core made of „honeycomb“
- glass pane MAT DRE 4 mm thick
- the edge in the color of the door leaf or black
- concrete oxide and antique copper decors available only with black edge

OPTIONS WITHOUT EXTRA CHARGE

- ventilation sleeves
- three hinges - applies to rebated door leaf
- glass pane DECORMAT BROWN, DECORMAT GRAPHITE and transparent glass pane

REBATED DOOR LEAF

- straight edge
- 2 silver screw-in pivot hinges
- silver or black deadbolt lock with a simple key, bathroom lock, cylinder lock or economic lock

NON-REBATED OPENING DOOR LEAF (extra charge)

- edge whitout rebate
- sockets for 2 hidden concealed Estetic 80 hinges (non-rebated door frames are equipped with hinges)
- magnetic/mechanical lock for a simple key, bathroom lock, cylinder lock or economic lock in steel and black color or magnetic in white, gold color - to choose from

SLIDING DOOR LEAF

- edge whitout rebate
- socket for hook lock and/or for handles

DOOR LEAF WITH INVERTED REBATE (extra charge)

- active single door leaf
- straight edge
- sockets for two recessed Estetic 1821 hinges (hinges constitute a part of the door frame)
- magnetic lock for a simple key, bathroom lock, cylinder lock or economy lock in steel, black, white, gold - to choose from
- does not apply to door leaves with antique copper or oxide concrete decors

DOOR FRAMES

- for door leaves from NOVA collection it is recommended to use door frames in the same colour as door leaf or in black matt 2 decor

OPTIONS AVAILABLE WITH EXTRA CHARGE

- Silent 37dB package (dropping seal + acoustic filling) - NOVA 10, 50 - 80
- core made of tubular chipboard
- non-rebated door leaf
- door leaf "90", "100"
- ventilation undercut
- recuperative shortcut -8mm
- door leaf with inverted rebate
- plastic ventilation grille
- aluminum ventilation grille
- black fittings for rebated door leaf
- It is possible to buy only the steel BULAJ in black or stainless steel at a price

NOTE: Third Estetic 80 hinge for non-rebated doors (extra charge is added to the price of the door frame)

NOTE: Third hinge Estetic 1821 for doors with inverted rebate (extra charge is added to the price of the door frame)

NOTE: THE SILENT PACKAGE APPLIES TO REBATED AND NON-REBATED SINGLE LEAF DOOR.

NOVA MODELS

NOVA 10



NOVA 20



NOVA 30



NOVA 40



NOVA 50



NOVA 60



NOVA 70



NOVA 80



NOVA




NOVA 80 - natural halifax oak



NOVA 10 - natural halifax oak

DECORS

LAMINATES EGGER	halifax gray oak	halifax natural oak	Halifax Tabac Oak
	brushed steel	brushed gold	moro matt



Option of combining a door fra-
me in DRE-Cell black matt2 foil
and natural Halifax oak laminate



NOTE: the Silent package applies to rebated and non-rebated single leaf door..

STANDARD OPTIONS

- the door leaf surface is covered with a 3 mm thick laminated synchronous board
- door leaf frame made of softwood
- core made of „honeycomb“
- glass pane MAT DRE 4 mm thick
- edgeband in black colour
- for natural halifax oak decor, the edge in the color of the door leaf or black
- NOVA 50 - 80 Vertical inlays made of laminate: brushed steel, brushed gold or more matt

OPTIONS WITHOUT EXTRA CHARGE

- ventilation sleeves
- three hinges - applies to rebated door leaf
- glass pane DECORMAT BROWN, DECORMAT GRAPHITE and transparent glass pane

REBATED DOOR LEAF

- straight edge
- 2 silver screw-in pivot hinges
- silver or black deadbolt lock with a simple key, bathroom lock, cylinder lock or economic lock

NON-REBATED OPENING DOOR LEAF (extra charge)

- edge whitout rebate
- sockets for 2 hidden concealed Estetic 80 hinges (non-rebated door frames are equipped with hinges)
- magnetic/mechanical lock for simple key, bathroom lock, cylinder lock or economic lock in steel and black color or magnetic in white color - to choose from

SLIDING DOOR LEAF

- edge whitout rebate
- socket for hook lock and/or for handles

DOOR FRAMES

- for door leaves from NOVA collection we recommend door frames in DRE-CELL black matt 2 foil and in CPL laminate natural halifax oak for door leaves made in laminate natural halifax oak, in longitudinal arrangement in the second CPL price group

OPTIONS AVAILABLE WITH EXTRA CHARGE

- Silent 37dB package (dropping seal + acoustic filling)NOVA 10,50-80 1st gr. of Egger laminates
- core made of tubular chipboard
- non-rebated door leaf
- "100" door leaves
- ventilation undercut
- recuperative shortcut -8mm
- plastic ventilation grille
- aluminum ventilation grille
- black fittings for rebated door leaf
- It is possible to buy only the steel BULAJ in black or stainless steel at a price

NOTE: Third Estetic 80 hinge for non-rebated doors (extra charge is added to the price of the door frame)

NOTE: THE SILENT PACKAGE APPLIES TO REBATED AND NON-REBATED SINGLE LEAF DOOR.

steel BULAJ NOVA 30 - in the steel or black colour. Available only MAT or transparent glass pane.

NOVA MODELS

NOVA 10



NOVA 20



NOVA 30



NOVA 40



NOVA 50



NOVA 60



NOVA 70



NOVA 80



REZZO

NEW



REZZO 50 - premium natural oak



REZZO 10 - sage matt

DECORS

DRE CELL	white mat	light gray matt	warm gray matt	cashmere matt	sage oak (textured)	sage matt	dark olive matt
	dark blue matt	premium natur oak	evoke oak	vintage oak			



NOTE: the Silent package applies to rebated and non-rebated single leaf door..

STANDARD OPTIONS

- door leaf frame made of softwood
- milling a "V" pattern in black HDF board
- core made of „honeycomb“
- the edge in the color of the door leaf or black

OPTIONS WITHOUT EXTRA CHARGE

- ventilation sleeves
- three hinges - applies to rebated door leaf

REBATED DOOR LEAF

- straight edge
- 2 silver screw-in pivot hinges
- silver or black deadbolt lock with a simple key, bathroom lock, cylinder lock or economic lock

NON-REBATED OPENING DOOR LEAF (extra charge)

- edge whitout rebate
- sockets for 2 hidden concealed Estetic 80 hinges (non-rebated door frames are equipped with hinges)
- magnetic/mechanical lock for a simple key, bathroom lock, cylinder lock or economic lock in steel and black color or magnetic in white, gold color - to choose from

SLIDING DOOR LEAF

- edge whitout rebate
- socket for hook lock and/or for handles

OPTIONS AVAILABLE WITH EXTRA CHARGE

- Silent 37dB package (drooping seal + acoustic filling) - REZZO 10 - 80
- core made of tubular chipboard
- non-rebated door leaf
- door leaf "90", "100"
- ventilation undercut
- recuperative shortcut -8mm
- plastic ventilation grille
- aluminum ventilation grille
- black fittings for rebated door leaf

NOTE: Third Estetic 80 hinge for non-rebated doors (extra charge is added to the price of the door frame)

NOTE: THE SILENT PACKAGE APPLIES TO REBATED AND NON-REBATED SINGLE LEAF DOOR.

DOOR FRAMES

- For doors from REZZO collection, we recommend door frames in the color of the foil or in the color DRE-CELL black matt2

REZZO MODELS



REZZO 10



REZZO 20



REZZO 30



REZZO 40



REZZO 50



REZZO 60



REZZO 70



REZZO 80



LUX



LUX 10 - birch



LUX 20 - viking oak

DECORS

DECORS	pavio oak	viking oak	country oak	cannero walnut	birch	wenge	uranus



Black edge,
black toilet lock



STANDARD OPTIONS

- door leaf surface is coated with primer material in the colour of decor and varnished
- high gloss lacquer
- door leaf frame made of MDF
- core made of perforated chipboard
- MAT DRE glass pane 4 mm thick (model LUX 20, LUX 40)

NON-REBATED DOOR LEAF

- edge without rebate in black colour fig.1
- sockets for 2 recessed Estetic 80 hinges in black, white or steel color (hinges constitute a part of the door frame)
- magnetic/mechanical lock for simple key, bathroom lock, cylinder lock or economic lock in steel and black color or magnetic in white color - to choose from

DOOR FRAMES

- for door leaves from LUX collection we recommend to use door frames lacquered in the same colour as the door leaf unit or in black matt decor 2

OPTION WITHOUT EXTRA CHARGE

- holes for ventilation sleeves
- DECORMAT BROWN, DECORMAT GRAPHITE and transparent glass (model LUX 20, LUX 40)

OPTIONS AVAILABLE WITH EXTRA CHARGE

- door leaf „100“
- ventilation undercut
- aluminum ventilation grille

NOTE: Third Estetic 80 hinge for non-rebated doors (extra charge is added to the price of the door frame)

steel BULAJ LUX 30- in the steel or black colour. Available only MAT or transparent glass pane.

LUX MODELS



LUX 10



LUX 20



LUX 30



LUX 40

RIVIA



RIVIA 10 - marrone chestnut / black ST



RIVIA 70 - marrone chestnut /white matt



DECORS

DRE CELL	White matt	White pine	siberian elm	sand elm	vintage elm	premium natur oak	walnut
	marrone chestnut textured	evoke oak	caramel walnut	anthracite elm	light gray matt	silver	
3D	grand oak	elm	Polish oak 3D				



Rivia 20 white matt base Rivia 20 black ST base

STANDARD OPTIONS

- door leaf frame made of softwood
- core made of tubular chipboard
- glass pane white bark 4 mm thick

OPTIONS WITHOUT EXTRA CHARGE

- glass pane „chinchila” or „window blind”
- ventilation sleeves
- three hinges - applies to rebated door leaf

REBATED DOOR LEAF

- straight edge, uniform flat glazing frame
- 2 silver screw-in pivot hinges
- single-point mortise simple key lock, bathroom lock, cylinder lock or economic lock

NON-REBATED OPENING DOOR LEAF (extra charge)

- edge without rebate, uniform flat glazing frame
- sockets for 2 recessed Estetic 80 hinges (hinges constitute a part of the door frame)
- magnetic/mechanical lock with a simple key, bathroom lock, cylinder lock or economic lock

SLIDING DOOR LEAF

- edge without rebate, uniform flat glazing frame
- socket for hook lock and/or for handles

***In RIVIA 70 and 120 models, the insert in the selected color has vertical grain. In the other models, the inserts have horizontal grain.

OPTIONS AVAILABLE WITH EXTRA CHARGE

- glass pane MAT DRE, DECORMAT BROWN, DECORMAT GRAPHITE, (applies to door leaf)

RIVIA 20, 30

RIVIA 40, 50

- white frost VSG 22.1 safe, complex glass pane

RIVIA 20, 30

RIVIA 40, 50

- non-rebated door leaf
- door leaf „90” and „100”
- ventilation undercut
- recuperative shortcut -8mm
- plastic ventilation grille
- aluminum ventilation grille
- black fittings for rebated door leaf

NOTE: Third Estetic 80 hinge for non-rebated doors (extra charge is added to the price of the door frame)

NOTE: The door leaf is made in white matt or black ST with a choice of center stripe decor. The edge of the door leaf is in the color of the central stripe. RIVIA 40 - BULAJ is covered with white or black PVC foil, RIVIA 50 - BULAJ is covered with silver foil.

By default, the configurator selects the colour of the door frame in the same colour as the middle strip of the door leaf unit.

RIVIA MODELS



GALERIA ALU



GALERIA ALU 20 - anthracite elm



GALERIA ALU 50 - acacia

DECORS

DRE CELL	white (textured)	White matt	White pine	siberian elm	sand elm	vintage elm	walnut
	premium natur oak	marrone chestnut textured	evoke oak	caramel walnut	anthracite elm	light gray matt	silver
3D	grand oak	elm	Polish oak 3D				
CPL laminat*	white	milky white	ashen	dark gray	concrete 2	gray oak	welsh oak
	acacia	celini walnut	walnut	honey oak	natural hickory	roasted walnut	black ST
	NEW light Casel- la oak	NEW cashmere	NEW anthracite				
		NEW brushed gold	NEW moro matt				
Inlays	brushed steel	brushed gold	moro matt				

8 mm wide inlays placed flush with the door surface on both sides



* laminate available in models 10, 20, 30, 50, 60



GALERIA ALU

REBATED, NON-REBATED DOOR LEAVES
interior doors

STANDARD OPTIONS

- door leaf frame made of softwood
- core made of tubular chipboard
- edge with a radius R 2.5 mm for 0.15-0.2 mm CPL laminates except white, milky white, ashen, cashmere.
- 8 mm decorative inserts, brushed steel, brushed gold or more matt to choose from
- glass pane white bark 4 mm thick

OPTIONS WITHOUT EXTRA CHARGE

- glass pane „chinchila” or „window blind”
- ventilation sleeves
- three hinges - applies to rebated door leaf

REBATED DOOR LEAF

- straight edge, flat glazing bar
- 2 silver screw-in pivot hinges
- a deadbolt lock with a simple key, a bathroom lock, a cylinder insert or an economic lock
- straight edge or edge with a radius R 2.5 mm made by direct-forming (in CPL laminate)

NON-REBATED OPENING DOOR LEAF (extra charge)

- edge without rebate, flat glazing bar
- sockets for 2 recessed Estetic 80 hinges (hinges constitute a part of the door frame)
- magnetic/mechanical lock with a simple key, bathroom lock, cylinder lock or economic lock

SLIDING DOOR LEAF

- edge without rebate, flat glazing bar
- socket for hook lock and/or for handles

NOTE: passive door leaf GALERIA ALU 20, 21, 22, 23, 24, 25, 60 without horizontal inserts in a uniform grain.

OPTIONS AVAILABLE WITH EXTRA CHARGE

- Silent 37dB package (dropping seal + acoustic filling) - GALERIA ALU 10 - 60
- glass pane MAT DRE, DECORMAT BROWN, DECORMAT GRAPHITE, (applies to door leaf)
GALERIA ALU 11, 13, 23
GALERIA ALU 21
GALERIA ALU 24, 25
GALERIA ALU 12, 22
- white frost VSG 22.1 safe, complex glass pane
GALERIA ALU 11
GALERIA ALU 13, 23
GALERIA ALU 21
GALERIA ALU 24
GALERIA ALU 25
GALERIA ALU 12
GALERIA ALU 22
- non-rebated door leaf
- door leaf „90” and „100”
- ventilation undercut
- recuperative shortcut -8mm
- plastic ventilation grille
- aluminum ventilation grille
- cover strip for double non-rebated door leaf
- black fittings for rebated door leaf
- double leaf door

leaf price x2

NOTE: Third Estetic 80 hinge for non-rebated doors (extra charge is added to the price of the door frame)

NOTE: THE SILENT PACKAGE APPLIES TO REBATED AND NON-REBATED SINGLE LEAF DOOR.

GALERIA ALU MODELS



GALERIA ALU
10



GALERIA ALU
20



GALERIA ALU
30



GALERIA ALU
50



GALERIA ALU
60



GALERIA ALU
11




GALERIA ALU
12




GALERIA ALU
13



GALERIA ALU
21



GALERIA ALU
22



GALERIA ALU
23



GALERIA ALU
24



GALERIA ALU
25



FINEA

FINEA B



FINEA 40 - vintage oak



FINEA 60 - sand oak

DECORS

DRE CELL	white (textured)	White matt	White pine	siberian elm	sand elm	vintage elm	walnut
	premium natur oak	marrone chestnut textured	evoke oak	caramel walnut	anthracite elm	light gray matt	silver
3D	grand oak	elm	Polish oak 3D				



FINEA and FINEA B

REBATED, NON-REBATED DOOR LEAVES
interior doors

STANDARD OPTIONS

- door leaf frame made of softwood
- core made of tubular chipboard
- glass pane white bark 4 mm thick

OPTIONS WITHOUT EXTRA CHARGE

- glass pane „chinchila” or „window blind”
- ventilation sleeves
- three hinges - applies to rebated door leaf

REBATED DOOR LEAF

- straight edge, flat glazing bar
- 2 silver screw-in pivot hinges
- single-point mortise simple key lock, bathroom lock, cylinder lock or economic lock

NON-REBATED OPENING DOOR LEAF (extra charge)

- edge without rebate, flat glazing bar
- sockets for 2 recessed Estetic 80 hinges (hinges constitute a part of the door frame)
- magnetic/mechanical lock with a simple key, bathroom lock, cylinder lock or economic lock

SLIDING DOOR LEAF

- edge without rebate, flat glazing bar
- socket for hook lock and/or for handles

OPTIONS AVAILABLE WITH EXTRA CHARGE

- glass pane MAT DRE, DECORMAT BROWN, DECORMAT GRAPHITE (applies to door leaf)

FINEA 20, FINEA B 20

FINEA 30, 50, 60, FINEA B 30, 50, 60

- white frost VSG 22.1 safe, complex glass pane

FINEA 20, FINEA B 20

FINEA 30, FINEA B 30

FINEA 50, 60, FINEA B 50, 60

- non-rebated door leaf

- door leaf „90” and „100”

- ventilation undercut

- recuperative shortcut -8mm

- plastic ventilation grille

- aluminum ventilation grille

- black fittings for rebated door leaf

NOTE: Third Estetic 80 hinge for non-rebated doors (extra charge is added to the price of the door frame)

FINEA and FINEA B MODELS



FINEA 10
FINEA B 10*



FINEA 20
FINEA B 20*



FINEA 30
FINEA B 30*



FINEA 40
FINEA B 40*



FINEA 50
FINEA B 50*



FINEA 60
FINEA B 60*



panels wood grain in
FINEA



*horizontal graining of
FINEA B panels

DECO



DECO 20 - concrete 2, black SLIM frame



DECO 30 - elm

DECORS

DRE CELL	white (textured)	White matt	White pine	siberian elm	sand elm	vintage elm	walnut
	premium natur oak	marrone chestnut textured	evoke oak	caramel walnut	anthracite elm	light gray matt	silver
3D	grand oak	elm	Polish oak 3D				
CPL Laminate	white	milky white	ashen	dark gray*	concrete 2	gray oak	welsh oak
	acacia	celini walnut	walnut	honey oak	natural hickory	roasted walnut	black ST
	NEW light Casel- la oak	NEW cashmere	NEW anthracite				

* laminate available while stock last



STANDARD OPTIONS

- door leaf frame made of softwood
- edge with a radius R 2.5 mm for CPL laminates with a thickness of 0.15-0.2 mm, except for white, milky white, ash grey, cashmere
- core made of „honeycomb“
- glass pane white bark 4 mm thick
- flat 4mm HDF panel in DECO 40

OPTIONS WITHOUT EXTRA CHARGE

- glass pane „chinchila“ or „window blind“
- ventilation sleeves
- three hinges - applies to rebated door leaf

REBATED DOOR LEAF

- straight edge, flat glazing frame in the door leaf decor or black Slim
- 2 silver screw-in pivot hinges
- single-point mortise simple key lock, bathroom lock, cylinder lock or economic lock
- rounded frame, straight edge or edge with a radius R 2.5 mm made using the directforming method (in CPL laminate)

NON-REBATED OPENING DOOR LEAF (extra charge)

- edge without rebate, flat glazing frame in the door leaf decor or black Slim
- sockets for 2 hidden recessed Estetic 80 hinges (hinges constitute a part of the door frame)
- magnetic/mechanical lock with a simple key, bathroom lock, cylinder lock or economic lock
- edge without rebate, rounded glazing frame (in CPL laminate)

SLIDING SYSTEM DOOR LEAF

- edge without rebate and optionally: flat glazing frame in the door leaf decor or black Slim or rounded glazing frame
- socket for hook lock and/or for handles
- edge without rebate, rounded glazing frame (in CPL laminate)

OPTIONS AVAILABLE WITH EXTRA CHARGE

- decorative glass MAT DRE, DECORMAT BROWN, DECORMAT GRAPHITE (for door leaf)
- DECO 10, 20, 30
- white frost VSG 22.1 safe, complex glass pane
- DECO 10, 20, 30
- core made of tubular chipboard
- non-rebated door leaf
- door leaf „90“ and „100“
- ventilation undercut
- recuperative shortcut -8mm
- plastic ventilation grille
- aluminum ventilation grille
- cover strip for double non-rebated door leaf
- black fittings for rebated door leaf
- double leaf door

leaf price x2

NOTE: Third Estetic 80 hinge for non-rebated doors (extra charge is added to the price of the door frame)

DECO MODELS



DECO 10



DECO 20



DECO 30



DECO 40



DECO 10
with SLIM black
glazing bar



DECO 20
with black glass
pane frame SLIM



DECO 30
with black glass
pane frame SLIM



DECO 40
with black glass
pane frame SLIM

MODERN



MODERN 20 - white matt



MODERN 30 - marrone chestnut textured

DECORS

DRE CELL	white (textured)	White matt	White pine	siberian elm	sand elm	vintage elm	walnut
	premium natur oak	marrone chestnut textured	evoke oak	caramel walnut	anthracite elm	light gray matt	silver
3D	grand oak	elm	Polish oak 3D				
CPL Laminate	white	milky white	ashen	welsh oak	acacia	celini walnut	gray oak
	honey oak	natural hickory	roasted walnut	black ST	dark gray*	concrete 2	walnut
	NEW light Casel- la oak	NEW cashmere	NEW anthracite				

* laminate available while stock last



MODERN

MODERN

DOOR LEAVES - REBATED, NON-REBATED, WITH VARIABLE HEIGHTS

interior doors

STANDARD OPTIONS

- door leaf frame made of softwood
- core made of „honeycomb“
- glass pane white bark 4 mm thick

OPTIONS WITHOUT EXTRA CHARGE

- glass pane „chinchila“ or „window blind“
- ventilation sleeves
- three hinges - applies to rebated door leaf

REBATED DOOR LEAF

- straight edge, flat glass pane frame (in CPL laminate - rounded) in door leaf decor or black Slim, 4 mm flat HDF panels
- 2 pcs. of silver screw-in hinges, 3 pcs. with variable heights
- single-point mortise lock for simple key, for bathroom lock, for cylinder lock or economic lock

NON-REBATED HINGED DOOR LEAF (extra charge)

- edge without rebate, flat glass pane frame (in CPL laminate - rounded), in door leaf decor or black Slim, 4 mm flat HDF panels
- sockets for 2 recessed Estetic 80 hinges (hinges constitute a part of the door frame)
- magnetic/mechanical lock with a simple key, bathroom lock, cylinder lock or economic lock

SLIDING DOOR LEAF (does not apply to height 1983)

- edge without rebate and optionally: flat glazing frame in the door leaf decor or black Slim, flat HDF panels 4 mm thick or rounded glazing frame, profiled MDF panels 19 mm thick
- socket for hook lock and/or for handles
- in CPL laminate, edge without rebate and optionally: rounded glass pane frame in the colour of the door leaf or black Slim 4 mm flat HDF panels

OPTIONS AVAILABLE WITH EXTRA CHARGE

- glass pane MAT DRE, DECORMAT BROWN, DECORMAT GRAPHITE, (applies to door leaf)

MODERN 20

MODERN 30

MODERN 40

MODERN 50

- white frost VSG 22.1 safe, complex glass pane

MODERN 20

MODERN 30

MODERN 40

MODERN 50

- stabilising insert:

- core made of: tubular chipboard (1983 and 2043)

- tubular chipboard (2110 and 2240)

- door leaf „90“ and „100“ (1983 and 2043)

- door leaf "90" and "100"

- non-rebated door leaf

- ventilation undercut

- recuperative shortcut -8mm

- plastic ventilation grille

- aluminum ventilation grille

- cover strip for double non-rebated door leaf

- black fittings for rebated door leaf

- double leaf door

leaf price x2

NOTE: Third Estetic 80 hinge for non-rebated doors (extra charge is added to the price of the door frame)

NOTE: In rebated door leaves covered with laminates from the CPL group, it is possible to choose a door leaf with an edge radius of R=2.5 mm, except for white, milky white, ash, cashmere.

MODERN MODELS



MODERN 10



MODERN 20



MODERN 30



MODERN 40



MODERN 50



MODERN 10
with SLIM black
glazing bar



MODERN 20
with SLIM black
glazing bar



MODERN 30
with SLIM black
glazing bar



MODERN 40
with SLIM black
glazing bar



MODERN 50
with black glass
pane frame SLIM

PLUS



PLUS 30 height 2240 - white matt



PLUS 30 - grey oak

DECORS

DRE CELL	white (textured)	White matt	White pine	siberian elm	sand elm	vintage elm	walnut
	premium natur oak	marrone chestnut textured	evoke oak	caramel walnut	anthracite elm	light gray matt	silver
3D	grand oak	elm	Polish oak 3D				
CPL Laminate	white	milky white	ashen	welsh oak	acacia	celini walnut	walnut
	honey oak	natural hickory	roasted walnut	black ST	dark gray*	concrete 2	gray oak
	NEW light Casel- la oak	NEW cashmere	NEW anthracite				

* laminate available while stock last



STANDARD OPTIONS

- door leaf frame made of softwood
- core made of „honeycomb“
- glass pane white bark 4 mm thick

OPTIONS WITHOUT EXTRA CHARGE

- glass pane „chinchila“ or „window blind“
- ventilation sleeves
- three hinges - applies to rebated door leaf

REBATED DOOR LEAF

- straight edge, flat glass pane (in CPL laminate - rounded), 4 mm thick HDF flat panels
- 2 pcs. of silver screw-in hinges, 3 pcs. with variable heights
- single-point mortise lock for simple key, for bathroom lock, for cylinder lock or economic lock

NON-REBATED HINGED DOOR LEAF (extra charge)

- edge without rebate, flat glass pane frame (in CPL laminate - rounded), 4 mm flat HDF panels
- sockets for 2 recessed Estetic 80 hinges (hinges constitute a part of the door frame)
- magnetic/mechanical lock with a simple key, bathroom lock, cylinder lock or economic lock

SLIDING DOOR LEAF (does not apply to height 1983)

- edge without rebate, flat HDF panels 4 mm thick and optional: flat glazing frame or rounded glazing frame (only rounded in CPL laminate)
- socket for hook lock and/or for handles

OPTIONS AVAILABLE WITH EXTRA CHARGE

- glass pane MAT DRE, DECORMAT BROWN, DECORMAT GRAPHITE (applies to door leaf) PLUS 20 PLUS 40, 50, 60, 70, 80 PLUS 30

- opal glass VSG 22.1, safety composite PLUS 20, 50, 60 PLUS 30 PLUS 40 PLUS 70, 80

filling: tubular chipboard (1983 and 2043) filling: tubular chipboard (2110 i 2240)

- door leaf „90“ and „100“ (1983 and 2043)
- door leaf "90" and "100"
- non-rebated door leaf
- ventilation undercut
- recuperative shortcut -8mm
- plastic ventilation grille
- aluminum ventilation grille
- cover strip for double non-rebated door leaf
- black fittings for rebated door leaf
- double leaf door

leaf price x2

NOTE: Third Estetic 80 hinge for non-rebated doors (extra charge is added to the price of the door frame)

NOTE: colours equivalent: W0118 - WHITE

NOTE: In rebated door leaves covered with laminates from the CPL group, it is possible to choose a door leaf with an edge radius of R=2.5 mm, except for white, milky white, ash, cashmere.

NOTE: Different heights are available in all models of PLUS collection.

Door leaf, dependent on selected height option - 1983 mm, 2110 mm or 2240 mm is dedicated to door frames with three hinges in corresponding heights.

PLUS MODELS



PLUS 10



PLUS 20



PLUS 30



PLUS 40



PLUS 50



PLUS 60



PLUS 70



PLUS 80

STANDARD



STANDARD 40S - chestnut marrone structure



STANDARD 10 - evoke oak door frame black matt 2

DECORS

DRE CELL	white (textured)	White matt	White pine	siberian elm	sand elm	vintage elm	walnut
	premium natur oak	marrone chestnut textured	evoke oak	caramel walnut	anthracite elm	light gray matt	silver
3D	grand oak	elm	Polish oak 3D				



STANDARD

STANDARD

REBATED, NON-REBATED DOOR LEAVES
interior doors

STANDARD OPTIONS

- door leaf frame made of softwood
- core made of „honeycomb“
- glass pane white bark 4 mm thick

OPTIONS WITHOUT EXTRA CHARGE

- glass pane „chinchila“ or „window blind“
- ventilation sleeves
- three hinges - applies to rebated door leaf

REBATED DOOR LEAF

- straight edge, flat glazing bar
- 2 silver screw-in pivot hinges
- single-point mortise simple key lock, bathroom lock, cylinder lock or economic lock

• **All orders in the investment standard require approval of The Investment Department. The investment standard is defined by the clear opening, with opened door leaf at 90 degree, respectively for interior doors: "80" 800 mm, "90" 900 mm.**

NON-REBATED OPENING DOOR LEAF (extra charge)

- edge without rebate, flat glazing bar
- sockets for 2 recessed Estetic 80 hinges (hinges constitute a part of the door frame)
- magnetic/mechanical lock with a simple key, bathroom lock, cylinder lock or economic lock

SLIDING DOOR LEAF

- edge without rebate and optional: flat or rounded glazing frame
- socket for hook lock and/or for handles

NOTE: the Silent package applies to rebated and non-rebated single leaf door.

NOTE: Selected configurations of STANDARD 10 model are available from stock: rebated in evoke oak colour and non-rebated in the white matt colour.

OPTIONS AVAILABLE WITH EXTRA CHARGE

- 37dB silent package (dropping seal + acoustic insert) - STANDARD 10
- glass pane MAT DRE, DECORMAT BROWN, DECORMAT GRAPHITE (applies to door leaf)
- STANDARD 20, 20s, 40, 40s, BULAJ MDF STANDARD 50, 50s
- STANDARD 30, 30s
- STANDARD 60
- white frost VSG 22.1 safe, complex glass pane
- STANDARD 20, 20s, 40, 40s
- STANDARD 50, 50s, BULAJ MDF
- STANDARD 30, 30s
- STANDARD 60
- core made of tubular chipboard
- non-rebated door leaf
- door leaf „90“ and „100“
- rebated door leaf "110" (only STANDARD 10)
- upper single point mortise lock (only STANDARD 10 with tubular chipboard and fixed door frame)
- ventilation undercut
- recuperative shortcut -8mm
- plastic ventilation grille
- aluminum ventilation grille
- non-rebated double door closing strip non-rebated
- black fittings for rebated door leaf
- double leaf door door leaf price x 2
- it is possible to buy only steel BULAJ in black or steel color - included in the price
- NOTE:** Third Estetic 80 hinge for non-rebated doors (extra charge is added to the price of the door frame)

STANDARD MODELS



STANDARD 10



STANDARD 20



STANDARD 20s



STANDARD 30



STANDARD 30s



STANDARD 40



STANDARD 40s



STANDARD 50



STANDARD 50s



STANDARD 60



MDF BULAJ



steel BULAJ



deadbolt lock upper



37 dB



Steel black BULAJ**



Steel BULAJ**

** only matt or transparent laminated glass available,

FANO



FANO 30s - white matte



FANO 30S - grand oak

DECORS

DRE CELL	white (textured)	White matt	White pine	siberian elm	sand elm	vintage elm	walnut
	premium natur oak	marrone chestnut textured	evoke oak	caramel walnut	anthracite elm	light gray matt	silver
3D	grand oak	elm	Polish oak 3D				



STANDARD OPTIONS

- door leaf frame made of softwood
- core made of „honeycomb“
- glass pane white bark 4 mm thick

OPTIONS WITHOUT EXTRA CHARGE

- glass pane „chinchila“ or „window blind“
- ventilation sleeves
- three hinges - applies to rebated door leaf

REBATED DOOR LEAF

- straight edge, flat glazing bar
- 2 silver screw-in pivot hinges
- single-point mortise simple key lock, bathroom lock, cylinder lock or economic lock

NON-REBATED OPENING DOOR LEAF (extra charge)

- edge without rebate, flat glazing frame, 19 mm thick MDF profiled panels
- sockets for 2 recessed Estetic 80 hinges (hinges constitute a part of the door frame)
- magnetic/mechanical lock with a simple key, bathroom lock, cylinder lock or economic lock

SLIDING DOOR LEAF

- edge without rebate, rounded or flat glazing frame, 19 mm thick profiled MDF panel
- socket for hook lock and/or for handles

OPTIONS AVAILABLE WITH EXTRA CHARGE

- glass pane MAT DRE, DECORMAT BROWN, DECORMAT GRAPHITE (applies to door leaf)

FANO 20, 20s

FANO 30, 30s

- white frost VSG 22.1 safe, complex glass pane

FANO 20, 20s

FANO 30, 30s

- core made of tubular chipboard

- non-rebated door leaf

- door leaf „90“ and „100“

- ventilation undercut

- recuperative shortcut -8mm

- plastic ventilation grille

- aluminum ventilation grille

- cover strip for double non-rebated door leaf

- black fittings for rebated door leaf

- double leaf door

leaf price x2

NOTE: Third Estetic 80 hinge for non-rebated doors (extra charge is added to the price of the door frame)

FANO MODELS



FANO 10



FANO 20



FANO 20s



FANO 30



FANO 30s

ARTE



ARTE 40 - sand oak



ARTE 20 - anthracite elm

DECORS

DRE CELL	white (textured)	White matt	White pine	siberian elm	sand elm	vintage elm	walnut
	premium natur oak	marrone chestnut textured	evoke oak	caramel walnut	anthracite elm	light gray matt	silver
3D	grand oak	elm	Polish oak 3D				



STANDARD OPTIONS

- door leaf frame made of softwood
- core made of „honeycomb“
- glass pane white bark 4 mm thick

OPTIONS WITHOUT EXTRA CHARGE

- glass pane „chinchila“ or „window blind“
- ventilation sleeves
- three hinges – applies to rebated door leaf

REBATED DOOR LEAF

- straight edge, flat glazing bar
- 2 silver screw-in pivot hinges
- single-point mortise simple key lock, bathroom lock, cylinder lock or economic lock

NON-REBATED OPENING DOOR LEAF (extra charge)

- edge without rebate, flat glazing bar
- sockets for 2 recessed Estetic 80 hinges (hinges constitute a part of the door frame)
- magnetic/mechanical lock with a simple key, bathroom lock, cylinder lock or economic lock

SLIDING DOOR LEAF

- edge without rebate, rounded glazing frame or flat glazing frame
- socket for hook lock and/or for handles

OPTIONS AVAILABLE WITH EXTRA CHARGE

- glass pane MAT DRE, DECORMAT BROWN, DECORMAT GRAPHITE (applies to door leaf)
 - ARTE 10-30, 90
 - ARTE 40, 50
 - ARTE 80
 - white frost VSG 22.1 safe, complex glass pane
 - ARTE 10, 20, 30
 - ARTE 40, 50
 - ARTE 80
 - ARTE 90
 - core made of tubular chipboard
 - non-rebated door leaf
 - door leaf „90“ and „100“
 - ventilation undercut
 - recuperative shortcut -8mm
 - plastic ventilation grille
 - aluminum ventilation grille
 - cover strip for double non-rebated door leaf
 - black fittings for rebated door leaf
 - double leaf door
- leaf price x2
- NOTE:** Third Estetic 80 hinge for non-rebated doors (extra charge is added to the price of the door frame)

ARTE MODELS



ARTE 10

ARTE 20

ARTE 30

ARTE 40


ARTE 50

ARTE 80

ARTE 90



UNI 10 - cashmere

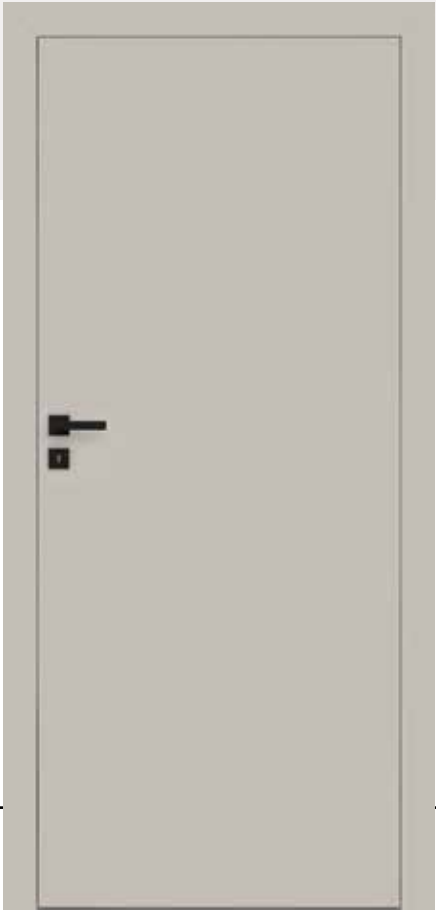

UNI 10 - cashmere

DECORS

PAINTED	white	cashmere	latte	ashen
---------	-------	----------	-------	-------

white - UV Premium acrylic varnish - RAL 9003
Cashmere - Premium UV Acrylic Varnish - NCS S2002-Y50R
Latte - Premium UV Acrylic Varnish - Flugger 4362, NCS S1505-Y50R
ashen - Premium UV acrylic varnish - RAL 7035



STANDARD OPTIONS

- door leaf painted with Premium UV acrylic varnish
- door leaf frame made of MDF
- core made of „honeycomb“
- glass pane white bark 4 mm thick

OPTIONS WITHOUT EXTRA CHARGE

- glass pane „chinchila“ or „window blind“
- ventilation sleeves
- third hinge to rebated door leaf

NOTE: To ensure highest quality of painted products, before painting process, both, door leaf and door frames are coated with special material which constitutes solid base.

REBATED DOOR LEAF

- straight edge
- 2 silver screw-in pivot hinges
- single-point mortise simple key lock, bathroom lock, cylinder lock or economic lock

NON-REBATED OPENING DOOR LEAF (extra charge)

- edge whitout rebate
- sockets for 2 recessed Estetic 80 hinges (hinges constitute a part of the door frame)
- magnetic/mechanical lock for simple key, bathroom lock, cylinder lock or economic lock in steel and black color or magnetic in white color - to choose from

SLIDING DOOR LEAF

- edge whitout rebate
- socket for hook lock and/or for handles

NOTE: Selected configurations of UNI 10 rebated model in white are available from stock.

NOTE: THE SILENT PACKAGE APPLIES TO REBATED AND NON-REBATED SINGLE LEAF DOOR.

DOOR LEAF WITH INVERTED REBATE (extra charge)

- active single door leaf
- straight edge
- sockets for two recessed Estetic 1821 hinges (hinges constitute a part of the door frame)
- magnetic simple key lock, bathroom lock, cylinder lock or economic lock

OPTIONS AVAILABLE WITH EXTRA CHARGE


- Silent 37dB package (dropping seal + acoustic insert) - UNI 10
- glass pane MAT DRE, DECORMAT BROWN, DECORMAT GRAPHITE (applies to door leaf)
- BULAJ MDF
- white frost VSG 22.1 safe, complex glass pane
- BULAJ MDF
- stabilising insert tubular chipboard
- core made of full chipboard
- door leaf „90“ and „100“
- ventilation undercut
- recuperative shortcut -8mm
- non-rebated door leaf
- door leaf with inverted rebate
- cover strip for double non-rebated door leaf
- plastic ventilation grille
- aluminum ventilation grille
- black fittings for rebated door leaf
- double leaf door

leaf price x2

- it is possible to buy only steel BULAJ in black or steel color - included in the price

NOTE: Third Estetic 80 hinge for non-rebated doors (extra charge is added to the price of the door frame)


NOTE: Third hinge Estetic 1821 for doors with inverted rebate (extra charge is added to the price of the door frame)

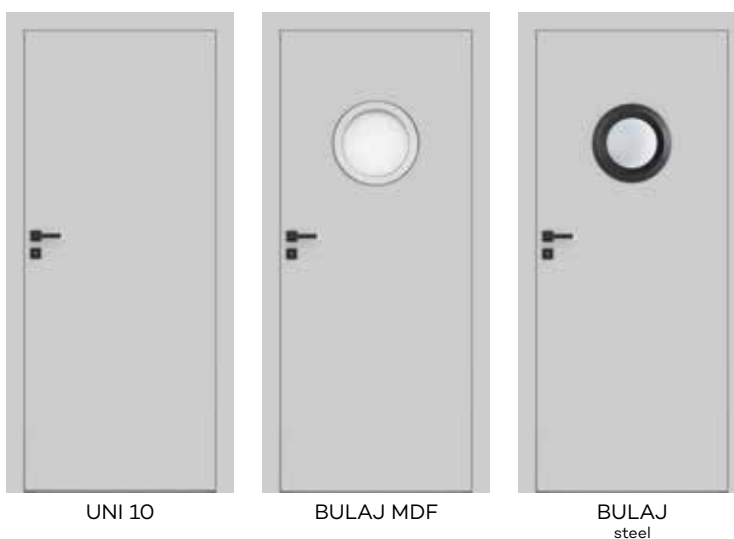UNI MODELS

FARGO



FARGO 30 - ashen

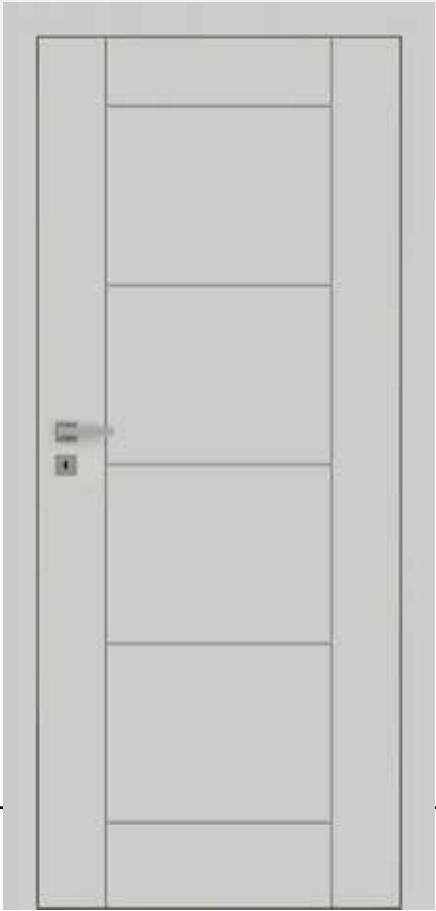


FARGO 10 - ashen

DECORS

PAINTED	white	cashmere	latte	ashen
---------	-------	----------	-------	-------

white - UV Premium acrylic varnish - RAL 9003
Cashmere - Premium UV Acrylic Varnish - NCS S2002-Y50R
Latte - Premium UV Acrylic Varnish - Flugger 4362, NCS S1505-Y50R
ashen - Premium UV acrylic varnish - RAL 7035



type of milling in
FARGO collection



STANDARD OPTIONS

- door leaf painted with Premium UV acrylic varnish
- door leaf frame made of MDF
- core made of „honeycomb“

OPTIONS WITHOUT EXTRA CHARGE

- ventilation sleeves
- three hinges - applies to rebated door leaf

NOTE: To ensure highest quality of painted products, before painting process, both, door leaf and door frames are coated with special material which constitutes solid base.

REBATED DOOR LEAF

- straight edge
- 2 silver screw-in pivot hinges
- single-point mortise simple key lock, bathroom lock, cylinder lock or economic lock

NON-REBATED OPENING DOOR LEAF (extra charge)

- edge whitout rebate
- sockets for 2 recessed Estetic 80 hinges (hinges constitute a part of the door frame)
- magnetic/mechanical lock for simple key, bathroom lock, cylinder lock or economic lock in steel and black color or magnetic in white color - to choose from

SLIDING DOOR LEAF

- edge whitout rebate
- socket for hook lock and/or for handles

DOOR LEAF WITH INVERTED REBATE (extra charge)

- active single door leaf
- straight edge
- sockets for two recessed Estetic 1821 hinges (hinges constitute a part of the door frame)
- magnetic simple key lock, bathroom lock, cylinder lock or economic lock

OPTIONS AVAILABLE WITH EXTRA CHARGE

- Silent 37dB package (dropping seal + acoustic filling) - FARGO 10 - 60
- door leaf "90" and "100"
- tubular chipboard
- core made of full chipboard
- ventilation undercut
- recuperative shortcut -8mm
- non-rebated door leaf
- door leaf with inverted rebate
- cover strip for double non-rebated door leaf
- plastic ventilation grille
- aluminum ventilation grille
- black fittings for rebated door leaf
- double leaf door

leaf price x2

NOTE: Third Estetic 80 hinge for non-rebated doors (extra charge is added to the price of the door frame)

NOTE: Third hinge Estetic 1821 for doors with inverted rebate (extra charge is added to the price of the door frame)

NOTE: the Silent package applies to rebated and non-rebated single leaf door.

FARGO MODELS

FARGO 10



FARGO 20



FARGO 30



FARGO 40



FARGO 50



FARGO 60



BINITO



BINITO 50 - cashmere

DECORS

PAINTED	white	cashmere	latte	ashen
---------	-------	----------	-------	-------

white - UV Premium acrylic varnish - RAL 9003
Cashmere - Premium UV Acrylic Varnish - NCS S2002-Y50R
Latte - Premium UV Acrylic Varnish - Flugger 4362, NCS S1505-Y50R
ashen - Premium UV acrylic varnish - RAL 7035



BINITO 50 - ashen



DOOR HANDLE WITH A BACKPLATE FOR

The promotion applies to rebated and non-rebated BINITO collections doors. Door handle model and finish color available door handles: WEGA, ATRIA, ARCTUS, ORION, ZETA, AVIOR and ALTAIR and a backplate for simple key or a cylinder lock or a bathroom lock.

The promotion lasts while stocks last.



STANDARD OPTIONS

- door leaf painted with Premium UV acrylic varnish
- door leaf frame made of MDF
- core made of „honeycomb“
- glass pane white bark 4 mm thick

OPTIONS WITHOUT EXTRA CHARGE

- glass pane „chinchila“ or „window blind“
- ventilation sleeves
- three hinges – applies to rebated door leaf

NOTE: To ensure highest quality of painted products, before painting process, both, door leaf and door frames are coated with special material which constitutes solid base.

REBATED DOOR LEAF

- straight edge, flat glazing bar
- 2 silver screw-in pivot hinges
- single-point mortise simple key lock, bathroom lock, cylinder lock or economic lock

NON-REBATED OPENING DOOR LEAF (extra charge)

- edge without rebate, flat glazing bar
- sockets for 2 recessed Estetic 80 hinges (hinges constitute a part of the door frame)
- magnetic/mechanical lock for simple key, bathroom lock, cylinder lock or economic lock in steel and black color or magnetic in white color – to choose from

SLIDING DOOR LEAF

- edge without rebate, flat glazing bar
- socket for hook lock and/or for handles

DOOR LEAF WITH INVERTED REBATE (extra charge)

- active single door leaf
- straight edge
- sockets for two recessed Estetic 1821 hinges (hinges constitute a part of the door frame)
- magnetic simple key lock, bathroom lock, cylinder lock or economic lock

OPTIONS AVAILABLE WITH EXTRA CHARGE

- Silent 37dB package (dropping seal + acoustic filling) – BINITO 10 – 90
- glass pane MAT DRE, DECORMAT BROWN, DECORMAT GRAPHITE
- BINITO 11, 23
- BINITO 21, 100
- BINITO 24, 110
- white frost VSG 22.1 safe, complex glass pane
- BINITO 11
- BINITO 23
- BINITO 21, 100
- BINITO 24
- BINITO 110
- door leaf "90" and "100"
- tubular chipboard
- core made of full chipboard
- non-rebated door leaf
- ventilation undercut
- recuperative shortcut –8mm
- door leaf with inverted rebate
- cover strip for double non-rebated door leaf
- plastic ventilation grille
- aluminum ventilation grille
- black fittings for rebated door leaf
- double leaf door

leaf price x2

NOTE: Third Estetic 80 hinge for non-rebated doors (extra charge is added to the price of the door frame)

NOTE: Third hinge Estetic 1821 for doors with inverted rebate (extra charge is added to the price of the door frame)

NOTE: the Silent package applies to rebated and non-rebated single leaf door.

BINITO MODELS



BINITO 10



BINITO 20



BINITO 30



BINITO 50



BINITO 60



BINITO 70



BINITO 80



BINITO 90



BINITO 100



BINITO 110



BINITO 11




BINITO 21



BINITO 23



BINITO 24

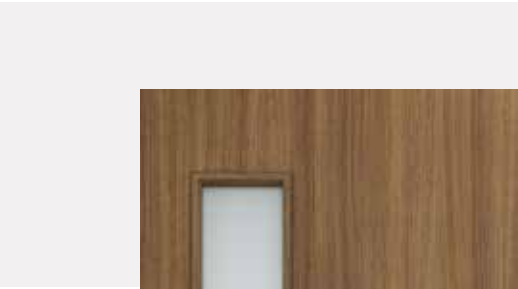

A vertical wooden door with a long, narrow, frosted glass window. The door has a silver handle and a lock. The wood grain is visible on the door.

CPL Laminate 1st group	white	milky white	ashen				
	welsh oak	acacia	celini walnut	walnut	honey oak	natural hickory	roasted walnut
CPL Laminate 2nd group	black ST	dark gray*	concrete 2	gray oak	NEW light Casella oak	NEW cashmere	NEW anthracite
	white alpine	bleached craft oak	riviera oak	rustic oak			
FINISH							



37 dB



STANDARD INVEST

REBATED DOOR LEAVES
interior doors

STANDARD OPTIONS

- door leaf frame made of MDF
- core made of „honeycomb“
- transparent glass, thickness 4 mm

OPTIONS WITHOUT EXTRA CHARGE

- ventilation sleeves
- three hinges - applies to rebated door leaf

REBATED DOOR LEAF

- straight edge
- edge with a radius of $R = 2.5$ mm made by the directforming method **available in 2nd CPL group except for cashmere laminate (rounded glazing frame in CPL laminates)**
- straight edge (**Slim frame in Finish foils**)
- 2 silver screw-in pivot hinges
- single-point mortise simple key lock, bathroom lock, cylinder lock or economic lock
- All orders in the investment standard require approval of The Investment Department. The investment standard is defined by the clear opening, with opened door leaf at 90° , respectively for interior doors: "80" 800 mm, "90" 900 mm.

OPTIONS AVAILABLE WITH EXTRA CHARGE

- 37dB silent package (dropping seal + acoustic insert) - STANDARD INVEST 10
- glass pane MAT DRE (applies to door leaf) STANDARD INVEST 20, 70, 80, BULAJ MDF STANDARD INVEST 60
- stabilising insert tubular chipboard
- door leaf „100“
- ventilation undercut
- recuperative shortcut -8mm
- plastic ventilation grille
- aluminum ventilation grille
- black fittings for rebated door leaf
- it is possible to buy only steel BULAJ in black or steel color - included in the price

NOTE! Selected configurations of STANDARD INVEST 10 rebated model in alpine white are available from stock.

STANDARD INVEST MODELS



STANDARD
INVEST 10



STANDARD
INVEST 20



STANDARD
INVEST 60



STANDARD
INVEST 70



STANDARD
INVEST 80



MDF BULAJ
INVEST



steel BULAJ
INVEST



Steel black BULAJ **



Steel BULAJ**

** only matt or transparent laminated glass available,



STANDARD CPL



STANDARD 10 - acacia



STANDARD CPL 20 - concrete 2

DECORS

CPL Laminate 1st group							
CPL Laminate 2nd group							
							



* laminate available while stock last

STANDARD CPL

REBATED, NON-REBATED DOOR LEAVES
interior doors

STANDARD OPTIONS

- edge with a radius R 2.5 mm only for laminates 0.15-0.20 mm with 2nd group CPL laminates (except cashmere laminate)
- straight edge for laminates 0.15-0.20 mm and 0.7 mm
- door leaf frame made of softwood
- core made of „honeycomb“
- glass pane white bark 4 mm thick
- CPL laminate 0.15 - 0.2mm or 0.7mm

OPTIONS WITHOUT EXTRA CHARGE

- glass pane „chinchila“ or „window blind“
- ventilation sleeves
- three hinges - applies to rebated door leaf

REBATED DOOR LEAF

- straight edge
- edge with a radius R 2.5 mm made by directforming method, available in 2nd group of CPL laminates 0.15-0.20 mm (except for cashmere laminate)
- **straight edge for laminates 0.7 mm**
- 2 silver screw-in pivot hinges
- single-point mortise simple key lock, bathroom lock, cylinder lock or economic lock
- All orders in the investment standard require approval of The Investment Department. The investment standard is defined by the clear opening, with opened door leaf at 90°, respectively for interior doors: "80" 800 mm, "90" 900 mm.

NON-REBATED OPENING DOOR LEAF (extra charge)

- edge without rebate, rounded glazing frame
- sockets for 2 recessed Estetic 80 hinges (hinges constitute a part of the door frame)
- magnetic/mechanical lock with a simple key, bathroom lock, cylinder lock or economic lock

SLIDING DOOR LEAF

- edge without rebate, rounded glazing frame
- socket for hook lock and/or for handles

NOTE: colours equivalent: W0118 - WHITE

OPTIONS AVAILABLE WITH EXTRA CHARGE

- Silent 37dB package (dropping seal + acoustic filling) - STANDARD 10 CPL
- glass pane MAT DRE, DECORMAT BROWN, DECORMAT GRAPHITE (applies to door leaf)
- STANDARD 20, BULAJ MDF
- STANDARD 60
- white frost VSG 22.1 safe, complex glass pane
- STANDARD 20
- STANDARD 60
- MDF BULAJ
- stabilising insert tubular chipboard
- door leaf „100“
- door leaf "110" (only STANDARD 10)
- laminates 0.15 - 0.20 mm
- non-rebated door leaf
- upper single point mortise lock (available only in STAN-DARD 10 door leaf model with tubular chipboard and fixed door frame)
- plastic ventilation grille
- aluminum ventilation grille
- cover strip for double non-rebated door leaf
- ventilation undercut
- recuperative shortcut -8mm
- black fittings for rebated door leaf
- double leaf door
- there is possibility to purchase steel BULAJ separately in black or steel color included in the price
- NOTE: Third Estetic 80 hinge for non-rebated doors (extra charge is added to the price of the door frame)
- CPL laminate 0.7 mm is also available in the width "110" and in the models Standard CPL 20, 60, MDF BULAJ, metal BULAJ - to place an order, please contact the Customer Service Department.**

leaf price x2

STANDARD CPL MODELS



STANDARD 10



STANDARD 20



STANDARD 60



MDF BULAJ



steel BULAJ



Steel black BULAJ **



Steel BULAJ**

** only matt or transparent laminated glass available



NOTE: the Silent package applies to rebated and non-rebated single leaf door.

Door leaf width: single leaf "60" ÷ "100", double leaf rebated "120" ÷ "200", double leaf non-rebated "120" ÷ "180".
Technical information: door frames: pp. 142-167, accessories: pp. 168-176 and 181, door leaves: pp. 182-195.

STANDARD

variable heights



STANDARD 10 - evoke oak



STANDARD 10 - vintage oak

DECORS

DRE CELL	white (textured)	White matt	White pine	siberian elm	sand elm	vintage elm	walnut
	premium natur oak	marrone chestnut textured	evoke oak	caramel walnut	anthracite elm	light gray matt	silver
CPL Laminate 1st group	white	milky white	ashen				
	welsh oak	acacia	celini walnut	walnut	honey oak	natural hickory	roasted walnut
CPL Laminate 2nd group	black ST	dark gray*	concrete 2	gray oak	NEW light Casel- la oak	NEW cashmere	NEW anthracite

* laminate available while stock last



STANDARD 10

REBATED, NON-REBATED DOOR LEAVES WITH VARIABLE HEIGHTS

interior doors

STANDARD OPTIONS

- door leaf frame made of softwood
- core made of „honeycomb“

OPTIONS WITHOUT EXTRA CHARGE

- ventilation sleeves

REBATED DOOR LEAF

- straight edge with the edging band
- edge with a radius R 2.5 mm made using the direcforming method
- Directforming **available in 2nd CPL group** except for ca-shmere laminate
- 3 silver screw-in pivot hinges
- single-point mortise simple key lock, bathroom lock, cylinder lock or economic lock

NON-REBATED OPENING DOOR LEAF (extra charge)

- edge whitout rebate
- sockets for 2 hidden concealed Estetic 80 hinges (non-rebated door frames are equipped with hinges)
- magnetic/mechanical lock with a simple key, bathroom lock, cylinder lock or economic lock

OPTIONS AVAILABLE WITH EXTRA CHARGE

- Silent 37dB package (1983) (dropping seal + acoustic filling) - STANDARD 10
- Silent 37dB package (2110 and 2240) (dropping seal + acoustic filling) - STANDARD 10
- filling: tubular chipboard (1983)
- tubular chipboard (2110 and 2240)
- door leaf "90" - "100" (1983) DRE - CELL
- door leaves "90"- "100" (2110 and 2240) DRE-CELL
- door leaf "90" - "100" (1983) DRE - CELL
- door leaf "100" (2110 and 2240) DRE - CPL
- non-rebated door leaf
- ventilation undercut
- plastic ventilation grille
- aluminum ventilation grille
- cover strip for double non-rebated door leaf
- black fittings for rebated door leaf
- double leaf door

leaf price x2

NOTE: Third Estetic 80 hinge for non-rebated doors (extra charge is added to the price of the door frame)

CPL 0.7 mm laminate also available - to place an order, please contact the Customer Service Department.

Door leaf, dependent on selected height option - 1983 mm, 2110 mm or 2240 mm is dedicated to door frames with three hinges in corresponding heights.

NOTE: colours equivalent: W0118 - WHITE

STANDARD 10 MODELS



STANDARD 10
height 1983



STANDARD 10
standard
height



STANDARD 10
height 2110



STANDARD 10
height 2240



DOORS WITH HIDDEN FRAME



Hidden doors mounted on an aluminum frame offer a minimalist design that blends perfectly into the wall, giving the impression of a coherent space. The option of finishing with paint or wallpaper allows for full personalization, while ready-made color variants or veneers offered by DRE ensure easy and quick adjustment to various interior styles.



SARA ECO 2 - primer, wall and door leaf are painted.

PROFI



PROFI - primer (painted in wall color)



PROFI - white door leaf with aluminum frame

DOOR LEAF DECORS

PAINTED	white	white - UV Premium acrylic varnish - RAL 9003
	primed	



NON-REBATED - OPENED OUTWARDS AND INVERTED REBATE - OPENED INWARDS

PROFI door with an aluminum door frame and a 50 mm thick door leaf is an innovative solution that allows for creative interior design with the usage of invisible doors, with the option of finishing the door leaf surface in the same colors as the walls.

PROFI DOOR STRUCTURE INCLUDES:

Aluminum door frame, "invisible" after assembly process, build in the wall or overlayed with plasterboards. After detailing process, the only visible part is the rebate of the door frame, prepared for future painting, e.g. in the colors of the walls.

Non-rebated flush door leaf and inverted rebate in two finishing options:

- Wide surfaces of the door leaf primed and ready for painting or wallpapering (e.g. in the color of the walls). The edges of the leaf are covered with the edge band that can be also painted. Painting should be done on your own or you shall choose a painted decor.
- Wide surfaces of the door leaf and edges painted with white acrylic UV varnish.

OPTIONS AVAILABLE WITH EXTRA CHARGE

- ventilation undercut
- dropping seal
- **Silent 37dB** package (dropping seal + acoustic filling) - Standard 2043
- **Silent 37dB package** (package (dropping seal + acoustic filling) - Standard 2240
- extra charge for the third hinge Estetic 80

Inverted rebate door frame profile



Non-rebated door frame profile



SARA ECO 2



SARA ECO 2 - standard 240 painted in the color of the wall



SARA ECO 2 - sand oak door leaf with aluminum frame



DOOR LEAF DECORS

PAINTED	white	cashmere	latte	ashen			
3D	grand oak	elm	Polish oak 3D				
DRE CELL1	white (textured)	White matt	White pine	siberian elm	sand elm	vintage elm	walnut
	premium natur oak	marrone chestnut textured	evoke oak	caramel walnut	anthracite elm	silver	light gray matt
	warm gray matt	cashmere matt	sage oak (textured)	sage matt	dark olive matt	dark blue matt	
DRE CELL2	antique copper*	concrete oxide*					
CPL	black ST						
DECOR	primed						

white - UV Premium acrylic varnish - RAL 9003
Cashmere - Premium UV Acrylic Varnish - NCS S2002-Y50R
Latte - Premium UV Acrylic Varnish - Flugger 4362, NCS S1505-Y50R
ashen - Premium UV acrylic varnish - RAL 7035

* decor with a door leaf edge in black colour

SARA ECO 2

NON-REBATED DOOR LEAVES WITH INVERTED REBATE
interior doors

NON-REBATED - OPENED OUTWARDS AND INVERTED REBATE - OPENED INWARDS

Sara Eco 2 door leaf is an innovative solution for creative interior design with the use of "invisible" doors. This unique construction gives possibility to finish surface of door leaf in the colors of the walls.

CONSTRUCTION OF SARA ECO 2 DOOR LEAF COMPRISES OF:

Aluminum door frame, "invisible" after assembly process, build in the wall or overlayed with plasterboards. After detailing process, the only visible part is the rebate of the door frame, prepared for future painting, e.g. in the colors of the walls.

Non-rebated flush door leaf and inverted rebate in two finishing options:

- wide surfaces of door leaf are primed and ready for painting or paperhanging (e.g. in the colour of the walls). Edges of the leaf are covered with a paintable edge band. Painting is to be done at one's discretion or optional choose painted decor.
- Wide door leaf surfaces covered with foils from DRE-Cell, 3D, CP black ST groups or with painting foil in the group of painted decors, the edges of the door leaf covered with the edging in the color of the foil (except for antique copper and concrete oxide colors).

OPTIONS AVAILABLE WITH EXTRA CHARGE WITH PRIMER

- ventilation undercut
- recuperative shortcut -8mm
- tubular chipboard in standard 202
- tubular chipboard in 220 standard
- tubular chipboard in 240 standard
- solid chipboard in standard 202
- solid chipboard in standard 220
- solid chipboard, standard 240

STANDARD OPTION

- softwood or MDF frame (primed and painted)
- sockets for 2 or 3 recessed hinges, new hinges with increased load capacity up to 60 kg are used in white and black door frame colors
- core made of „honeycomb“
- white or silver simple key magnetic lock, toilet lock, cylinder lock or economic lock

OPTIONS AVAILABLE WITH EXTRA CHARGE IN DRE-CELL, 3D AND PAINTED

- ventilation undercut
- recuperative shortcut -8mm
- plastic ventilation grille
- aluminum ventilation grille
- dropping seal
- tubular chipboard in standard 202
- tubular chipboard in 220 standard
- tubular chipboard in 240 standard
- solid chipboard in standard 202
- solid chipboard in standard 220
- solid chipboard, standard 240

Price of the door frame includes 2 or 3 hidden concealed hinges.

Note: in the option with a tubular chipboard or solid chipboard in standard 202, there are required 3 hinges.

NOTE: Sara ECO 2 door leaves in primer with DRE aluminum frames in aluminum and white are available from stock in selected configurations.

AVAILABLE COLOURS OF ALUMINUM DOOR FRAMES



aluminum



White
RAL 9003



black

SLIDING SYSTEMS, FOLDING



Sliding door systems save space, making them ideal for smaller rooms, and provide a modern and elegant look. Folding doors, on the other hand, allow for easy opening even in narrow spaces and at the same time offer more flexible room divisions, which increases the functionality of the interior.



ESTRA 5 - cashmere matt, sliding system

SLIDING SYSTEM

NS (on a wall), NT (on a tunnel)
interior doors

DRE WALL-MOUNTED SLIDING SYSTEM

Designed for single- or double-leaf interior doors, in a sliding version, it can be used with doors in our range of finishes: DRE-Cell, 3D foil, CPL laminates, and painted doors, with the exception of the following collections: Enter, Enter Akustik, Solid, and Solid RC2, fire-rated doors, glass doors, and doors with variable heights.

In our sale offer there are available two different types of sliding system:
NS - system mounted directly on the wall
NT - sliding system mounted together with adjustable tunnel

There are two options of NT sliding system:

- mounted together with adjustable tunnel with 63 mm architrave
- mounted together with adjustable tunnel with 80 mm architrave

The NS sliding system includes: a guide (SN 150, 180, 200) with fittings, a spacer strip, a cover and a fender beam (the beam is only for single-leaf doors, for doors with a lock there

NS system - mounted directly on the wall



NT system - installed using an adjustable tunnel



is a milling for a catch in the beam).
In the system mounted with adjustable tunnel, NT, set contains 2 additional 16 mm spacing boards with cross-sections adapted to the width of architraves (63 mm or 80 mm). There are differences in cross-sections of NS and NT masking element.

To complete entire set of sliding doors it is necessary to purchase sliding leaf unit in following dimensions:

Single leaf door: „60“, „70“, „80“, „90“, „100“

Double leaf door: „2x60“, „2x70“, „2x80“, „2x90“, „2x100“

Door leaf might be equipped with sockets for lock and/or handle - those accessories must be purchased separately.

In the system mounted with adjustable tunnel NT, it is necessary to purchase adjustable tunnel separately.

CPL 2nd group laminate applies to the natural halifax oak laminate with horizontal graining.

ACCESSORIES

- Square handle 1 pc.
- Rectangular handle 1 pc.
- Hook lock with key, WC, with two square handles
- hook lock with key, WC, for cylinder lock, with two rectangular handles
- One set of door handle for single leaf door consist of 2 pcs.
- 20/20 cylinder insert

NOTE: The masking strip and guide for double systems are obtained by connecting two elements from a single system.



SYSTEMS

SLIDING SYSTEM

of GLASS DOORS TP, TO
interior doors

SPAZIO SLIDING SYSTEM FOR GLASS DOORS.

Made of anodized aluminum, it is a complete solution designed for a finished jamb. The set includes a running rail with a straight or oval blend and elements designed for hanging a sliding glass panel and a bottom limiter.

There are two options of Spazio System (only difference is in the shape of external blende):

- Spazio TP – with straight blende
- Spazio TO – with oval blende

PRICE



- Price of the sliding system in aluminum color for glass doors
- Price of the sliding system, color black anode for glass doors

To complete the whole system it is recommended to buy glass door leaf in sliding version from Galla collection. There is designed for this solution round handle.

OPTIONS AVAILABLE WITH EXTRA CHARGE


- door handle (two-sided)

Note: There is no possibility to make ventilation option.

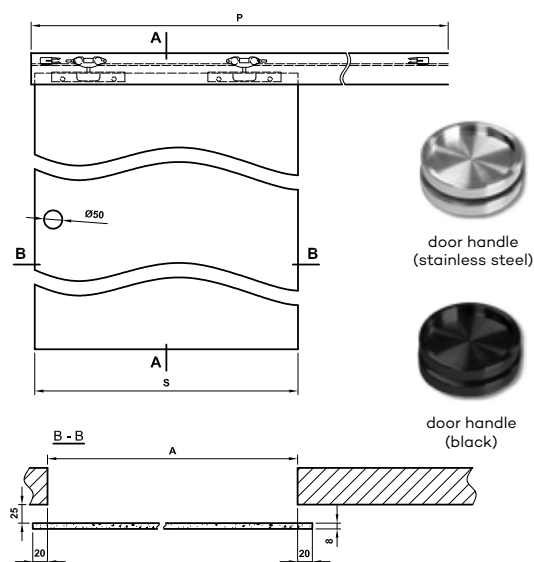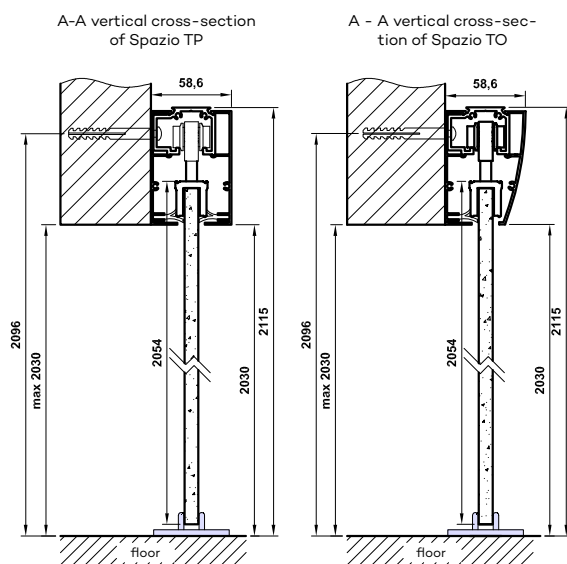

Dimensions

	S	A	P	S - width of door leaf unit A - width of wall passage P - length of guide channel
"60"	630	590	1340	
"70"	730	690	1540	
"80"	830	790	1740	
"90"	930	890	1940	

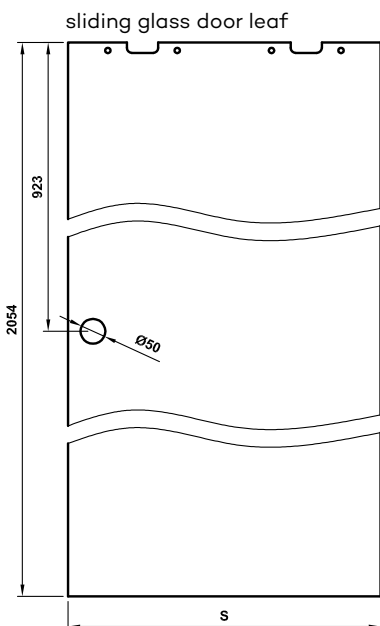

Spazio TO
aluminum



Spazio TP
aluminum



Spazio TO
black anode



Spazio TP
black anode



Width of door leaves: single leaf "60"÷"90".

SPAZIO CD WALL MOUNTED

SLIDING SYSTEM
interior doors


SPAZIO CD

On-wall mounted sliding system with anodized guide channel and rectangular blende. Is designated for panel doors and frame construction doors.


WHOLE SET COMPRISES OF:

- guide channel with side caps
- system sliding trolleys
- door leaf hangers
- bottom stopper
- assembly kit (screws and bolts)

To complete the system, you need to buy a sliding door leaf from our wide range in a version with a handle. The handle must be purchased separately.

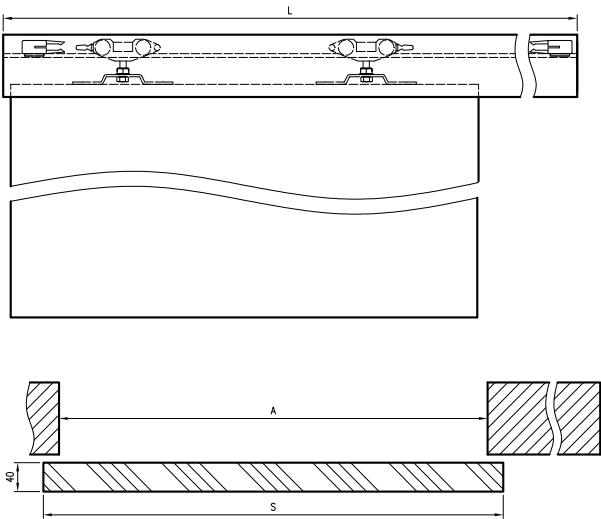

A - width of wall passage
S - width of door leaf unit
L - lenght of guide channel

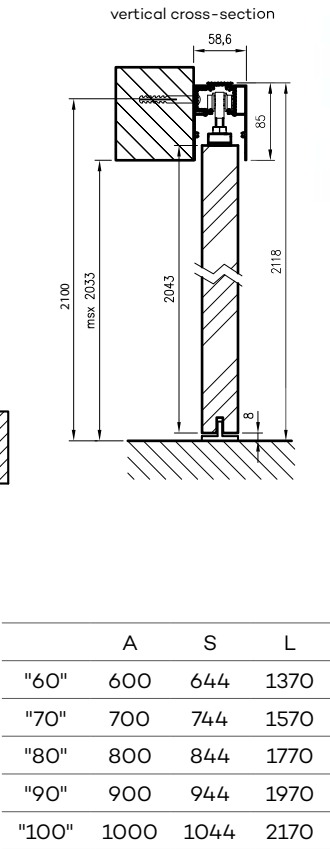

Spazio CD - aluminum



Spazio CD - black anode

SL FRAMELESS CASSETTE

SLIDING DOOR LEAVES
interior doors

SL FRAMELESS CASSETTE


Door frameless cassette with the possibility of assembly and disassembly of the door leaf after assembly and processing of the cassette. The assembly of the system involves embedding the cassette in the construction of profiles used to build a plasterboard wall (or other structure) with a thickness of:

- 100 mm for the SL 100 mm frameless cassette
- 125 mm for SL 125 mm frameless cassette

Then covering wide surfaces with 12.5 mm plasterboards (plasterboards must be purchased separately) and finishing these surfaces.

LIST OF DOOR COLLECTIONS AND MODELS AVAILABLE IN SL FRAMELESS CASSETTE SYSTEM:

ESTRA; ENA; TRIESTA; REVA; FOSCA; NESTOR; AURI; PREMIUM; PIANO; SCALA; VERSO; BERGE; EVEN; NOVA 10; RIVIA 10, RIVIA 60-130; GALERIA ALU 10, 20, 30, 50, 60; FINEA 10, 40; STANDARD 10, UNI 10; FARGO 10-60; BINITO 10-90. The door leaves have additional milling on the upper edge. Leaves with locks and flush door leaves with glazing and panels cannot be used for SL frameless cassettes.

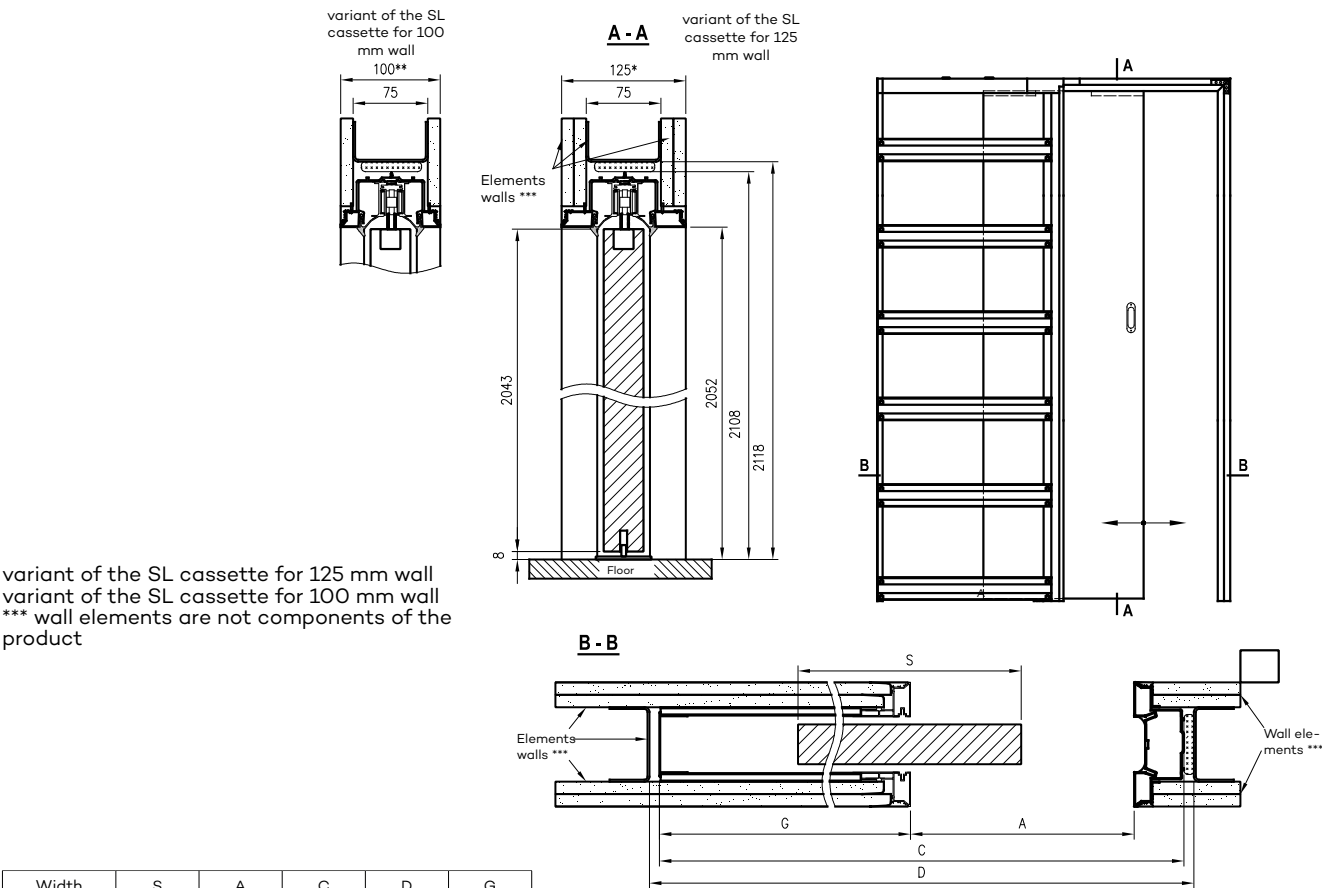

Width	S	A	C	D	G
60	644	620	1420	1440	750
70	744	720	1620	1640	850
80	844	820	1820	1840	950
90	944	920	2020	2040	1050
100	1044	1020	2220	2240	1150

S - door leaf width
A - width of the door frame passage
C - total width of cassette
D - width of walls passage prepared for cassette
G - cassette depth

PLUS CASSETTE



Sliding system PLUS door frame cassette - STANDARD 10 vintage oak



STANDARD 10 - PLUS cassette sand oak

DECORS

PAINTED	white	cashmere	latte	ashen			
3D	grand oak	elm	Polish oak 3D				
DRE CELL	white (textured)	White matt	White pine	siberian elm	sand elm	vintage elm	walnut
	premium natur oak	marrone chestnut textured	evoke oak	caramel walnut	anthracite elm	silver	light gray matt
	warm gray matt	cashmere matt	sage oak (textured)	sage matt	dark olive matt	dark blue matt	black matt 2
	concrete oxide*	antique copper*					

*while stock last

white - UV Premium acrylic varnish - RAL 9003
Cashmere - Premium UV Acrylic Varnish - NCS S2002-Y50R
Latte - Premium UV Acrylic Varnish - Flugger 4362, NCS S1505-Y50R
ashen - Premium UV acrylic varnish - RAL 7035

PLUS DOOR FRAME CASSETTE

SLIDING DOOR LEAVES

interior doors

PLUS DOOR FRAME CASSETTE

The system is installed by embedding the cassette into a 100mm or 125mm thick drywall (or other structure) profile.

The PLUS 100/125 cassette is universal.


Next, the wide surfaces are covered with 12.5 mm thick plasterboards (plasterboards must be purchased separately) and these surfaces are finished, as well as the Tunnel Cassette Cover is installed.

NOTE: VETRO D, VETRO D2 and VETRO E door leaves do not fit PLUS 100/125 cassettes.

In addition, for PLUS 100/125 cassettes for a wall thickness of 100 mm, door leaves with locks and flush doors with glazing or panels cannot be used.

THE SET INCLUDES:

- cassette elements made of aluminum and accessories enabling its assembly
- elements allowing for decorative construction of the resulting jamb - the so-called Tunnel Cassette Cover with 80mm and 63mm architraves.

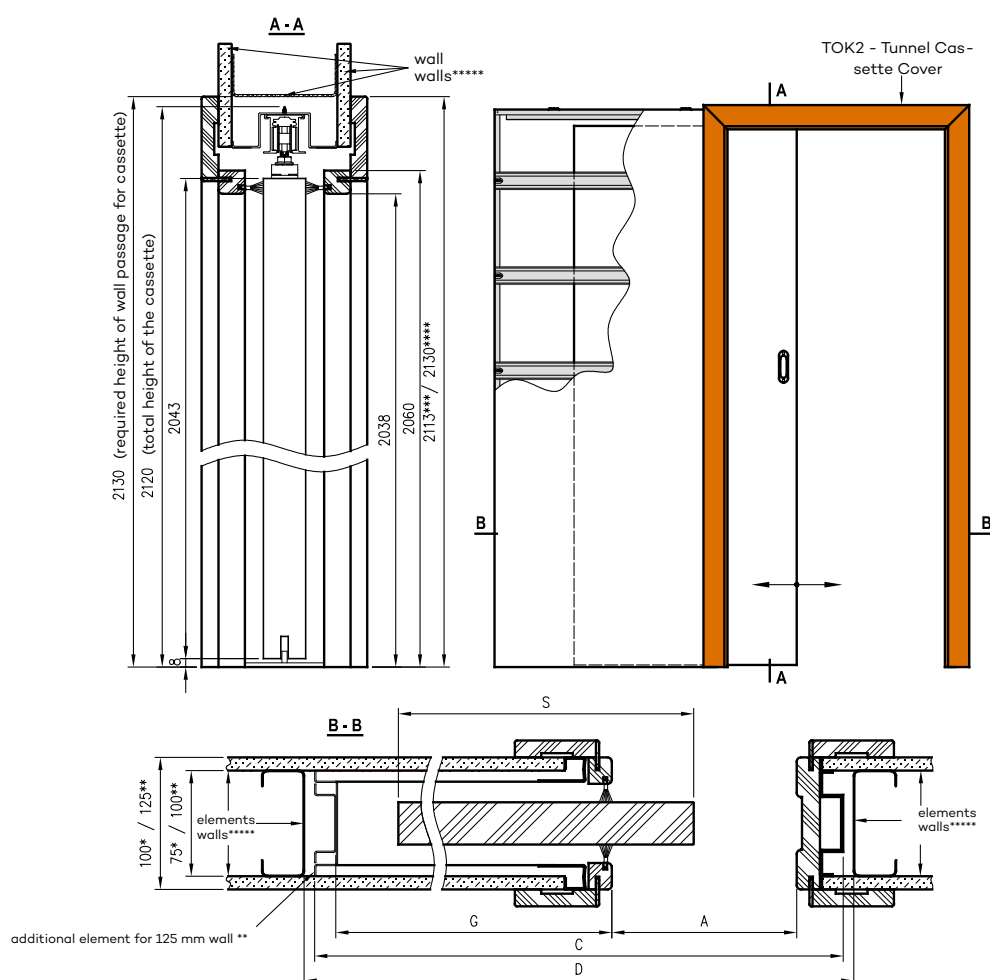

Width	A	S	C	D	G
60	623	644	1352	1372	665
70	723	744	1552	1572	765
80	823	844	1752	1772	865
90	923	944	1952	1972	965
100	1023	1044	2152	2172	1065

* installation on a 100mm thick wall

** installation on a 125mm thick wall

*** applies to T63 architrave

**** applies to the T80 architrave

***** wall elements are not components of the product

C - total width of cassette

D - width of walls passage prepared for cassette

G - depth of ready cassette

FOLDE



folding doors FOLDE 10 - white matt



FOLDE - light grey matt

DECORS

3D	grand oak	elm	Polish oak 3D					
DRE CELL	white (textured)	White matt	White pine	siberian elm	sand elm	vintage elm	walnut	
	premium natur oak	marrone chestnut textured	evoke oak	caramel walnut	anthracite elm	silver	light gray matt	



FOLDING DOORS FOLDE

interior doors

In folding doors during opening process of door leaf unit, doors fold into position parallel to each other . The complete set of folding doors comprises of:

- two-elements door leaf connected by 3 hidden recessed hinges
- adjustable door frame for folding doors

STANDARD OPTIONS


- door leaf frame made of softwood
- core made of „honeycomb“
- straight edge
- single-point mortise simple key lock, bathroom lock, cylinder lock or economic lock
- 3 hidden recessed ISTAR hinges installed between two-elements of door leaf unit

OPTIONS AVAILABLE WITH EXTRA CHARGE


- core made of tubular chipboard
- door leaf „90“ and „100“

NOTE: There is no possibility to shorten door leaf.


Cross-section of folding doors in closed position*
(right doors, left doors are mirror reflection)

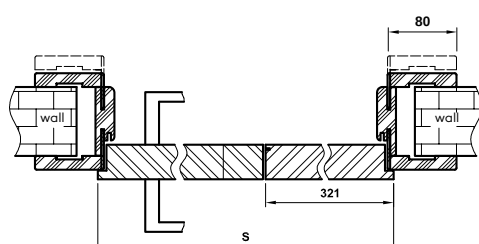

vertical cross-section

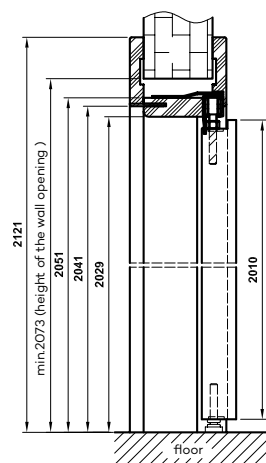

Cross section of folding door in open position*

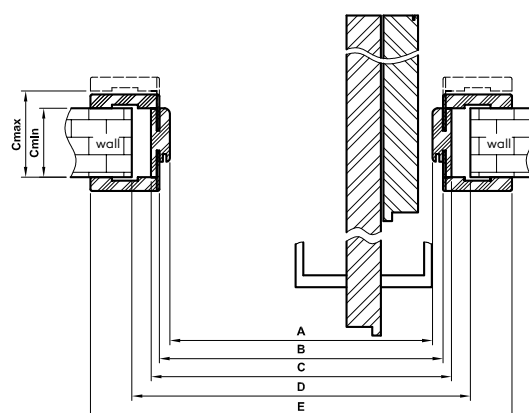

*NOTE: When doors are fully opened, the door fittings slightly reduce the clear opening by approx. 10 cm. (this value doesnt take into account door handle)

Dimensions

	S	A	B	C	D	E
"80"	844	806	830	850	880	990
"90"	944	906	930	950	980	1090
"100"	1044	1006	1030	1050	1080	1190

D - required width of wall opening

ADJUSTMENT RANGE

95-120
120-145
140-165
160-185
180-205
200-225
220-245
240-265
260-285
280-305

SIDE PANELS

REBATED FLUSH DOORS
INTERIOR DOORS

STANDARD OPTIONS

- door leaf frame made of softwood
- core made of „honeycomb“
- glass pane 4 mm thick: white bark, "window blind", CHINCHI-LA, MAT DRE, DECORMAT BROWN or DECORMAT GRAPHITE.
- 2 silver screw-in pivot hinges
- latch strike plate and two flush bolts
- to choose from: straight edge*, flat glazing frame or black Slim glazing frame

OPTION WITHOUT EXTRA CHARGE

- third hinge
- black glass pane frame Slim

OPTIONS AVAILABLE WITH EXTRA CHARGE

- white frost VSG 22.1 safe, complex glass pane SIDE PANEL 30 SIDE PANELS DOORS 40 SIDE PANELS DOORS 41
 - core made of perforated chipboard
 - black fittings for rebated door leaf
 - door frame for door leaf with side panel +30%
- Side panel it is passive rebated door leaf with "40" width and 40 mm thickness, with glazing or without glazing option, in uniform wood grain. Side panels can be paired with interior rebated door leaf in the following combination: „60+40“; „70+40“; „80+40“; „90+40“; „100+40“.
- SIDE PANEL 10 can be used for rebated interior doors. SIDE PANEL 30 is adapted to the ARTE 10-30 and STANDARD 30 models. SIDE PANEL 40 is adapted to the ARTE 40, 50, 90 models; STANDARD 40, DECO collection. SIDE PANEL 41 is adapted to the MODERN 30, PLUS 30 models.
- To make the best possible match of side panel to door leaf unit, besides selection of model, it is necessary to choose wright colour, type of the edge and number of hinges.

NOTE: There is no possibility to shorten side panels.



Side panel 10



Side panel 30



Side panel 40



Side panel 41

DRE CELL	white (textured)	White matt	White pine	siberian elm	sand oak	evoke oak	vintage oak	walnut	premium natur oak	anthracite elm	caramel walnut	marrone chestnut textured
	silver	light gray matt										
3D	grand oak	elm	Polish oak 3D									
CPL Laminate	white	milky white	ashen	welsh oak	acacia	celini walnut	walnut	honey oak	natural hickory	roasted walnut	black ST	dark gray*
		NEW	NEW	NEW								
	concrete 2	gray oak	light Casella oak	cashmere	anthracite							

* laminate available while stock last

SIDE PANELS

REBATED FRAME AND PANEL DOORS
INTERIOR DOORS

STANDARD OPTIONS

- stiles made of wood-based panels
- glass pane 4 mm: MAT DRE, decormat brown, decormat graphite or transparent glass
- 3 silver screw-in pivot hinges
- latch strike plate and two flush bolts
- straight edge

OPTIONS AVAILABLE WITH EXTRA CHARGE

- door frame for door leaf with side panel +30%

NOTE: Price of side panel is equal to the price of corresponding door leaf model.

Possibility of making side panels "40" for all models of frame doors included in the presented collections in the combinations "60+40"; "70+40"; "80+40"; "90+40"; "100+40"

NOTE: There is no possibility to shorten side panels.



side panel
PREMIUM
(edge
straight)
DRE-Cell 3D
foil



side panel
PIANO
(edge
straight)
DRE-Cell 3D
foil



side panel
FOSCA
(edge
straight)
DRE-Cell 3D
foil



side panel
SCALA A
(edge
straight)
DRE-Cell 3D
foil



side panel
SCALA B
(edge
straight)
DRE-Cell 3D
foil



side panel
AURI
(edge
straight)
DRE-Cell 3D
foil



side panel
REVA
(edge
straight)
DRE-Cell 3D
foil

white (textured)	White matt	White pine	siberian elm	light gray matt	sand elm	vintage elm	premium natur oak	evoke oak	caramel walnut	marrone chestnut textured	anthracite elm	DRE CELL
											black matt 2	
									grand oak	elm	Polish oak 3D	3D

TRANSOM LIGHTS

price per 1 running meter from gross




STANDARD 10 and side lights - vintage oak



ESTRA 6- sidelight - black matt2

POSSIBLE CONFIGURATIONS

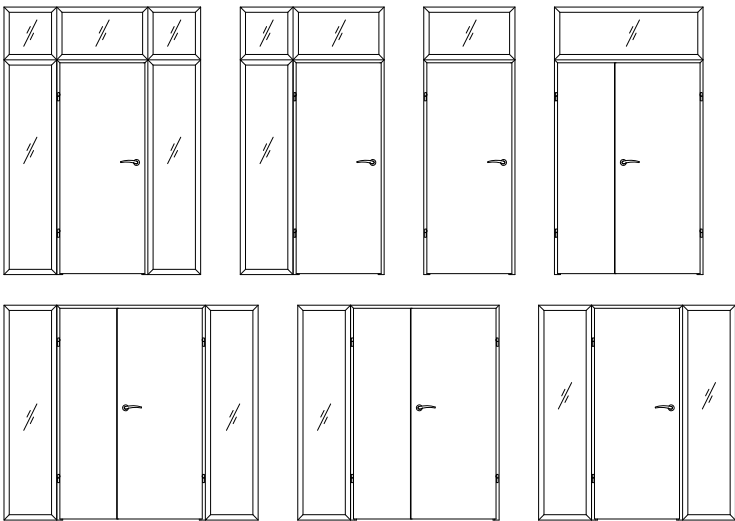

The price of the transom lights/sidelights applies to one running meter of the circumference measured on the outside of the transom lights/sidelight, and is an approximate price. In order to calculate the exact price of the finished product, please contact the Investment Department.

The price of 1 running meter of the perimeter of the transom/side lights is in Cell, 3D, CPL decors and painted. When ordering, please specify dimensions in mm.

To place an order please contact the Investment Department - phn. 55 236 42 59.

NOTE: height of the sidelight is adapted to the standard height of the fixed door frame. Therefore, we do not recommend shortening door frames in configuration with the sidelight.

TRANSOM LIGHTS / SIDELIGHTS

Transom lights/ sidelights are fixed, unpenable, glazed partition between rooms or spaces that may constitute an independent structure or a supplement for interior doors (except for glass doors) with a fixed door frames. Transom lights/sidelights are manufactured and delivered as a set of components ready for assembly. Set contains the following:

- two horizontal and two vertical main beams
- set of cover and instalation strips
- set of gaskets
- main beam couplers

Transom lights/sidelights are used in interior doors with a fixed door frames and they come in the following decors DRE-Cell, 3D , CPL laminate 0,15-0,20 mm and painted.

NOTE: Our product doesn't come with the glass pane, which should be purchased separately. We reccomend to use tempered glass pane with a thickness of 4 mm. Assembly of transom lights/sidelights should be performed once the "wet" construction are completed.


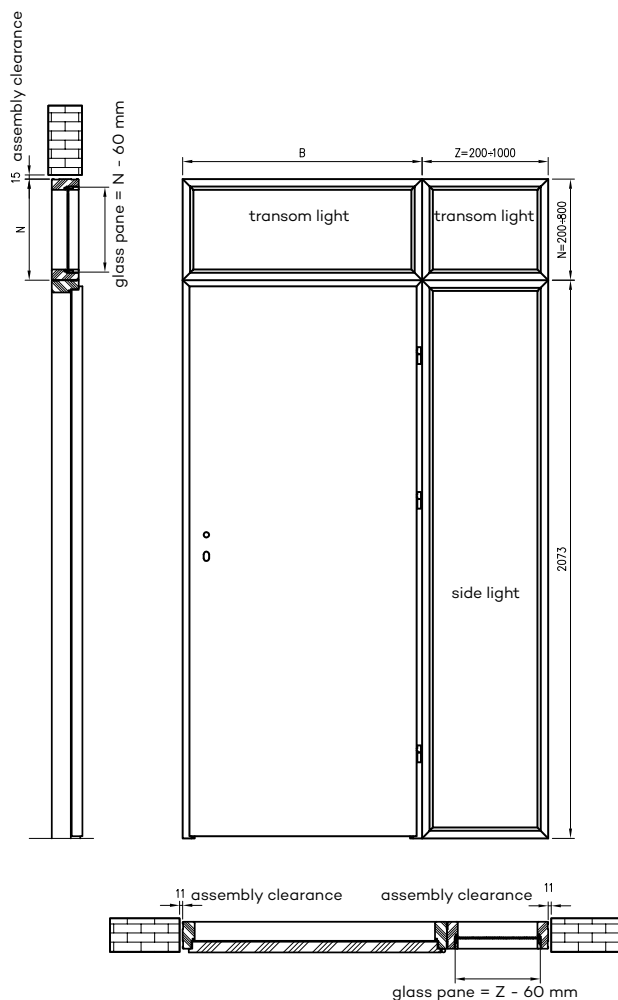


Fig. A cross-section of the transom light/sidelights

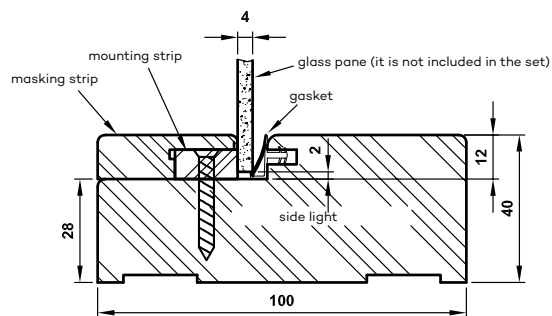

Dimensions of transom lights/side lights

range of products	height total	width total	lenght of the perimeter
side light	2073 mm	Z	$2 \cdot 2073 + 2 \cdot Z$
side light	N	Z	$2 \cdot N + 2 \cdot Z$
transom light	N	B	$2 \cdot N + 2 \cdot B$

available options of transom lights heights

„N” = 200-800 mm.

available options of the width of transom and side lights

„Z” = 200-1000 mm.

Width of the upper "B" transom lights is adjusted to the width of the fixed door frames; the available options of the width of fixed door frames; available options of the widths can be found in the following tables:


The transom lights are mounted on the single-leaf door frame

	"60"	"70"	"80"	"90"	"100"	"110"
B	688	788	888	988	1088	1188

TRANSOMS MOUNTED WITH THE DOOR FRAME IN DOUBLE-LEAF DOORS

	„100d"	„110d"	„120"	„130"	„140"	„150"	„160"	„170"	„180"	„190"	„200"
B	1123	1223	1323	1423	1523	1623	1723	1823	1923	2023	2123

TECHNICAL DOORS INTERIOR ENTRANCE

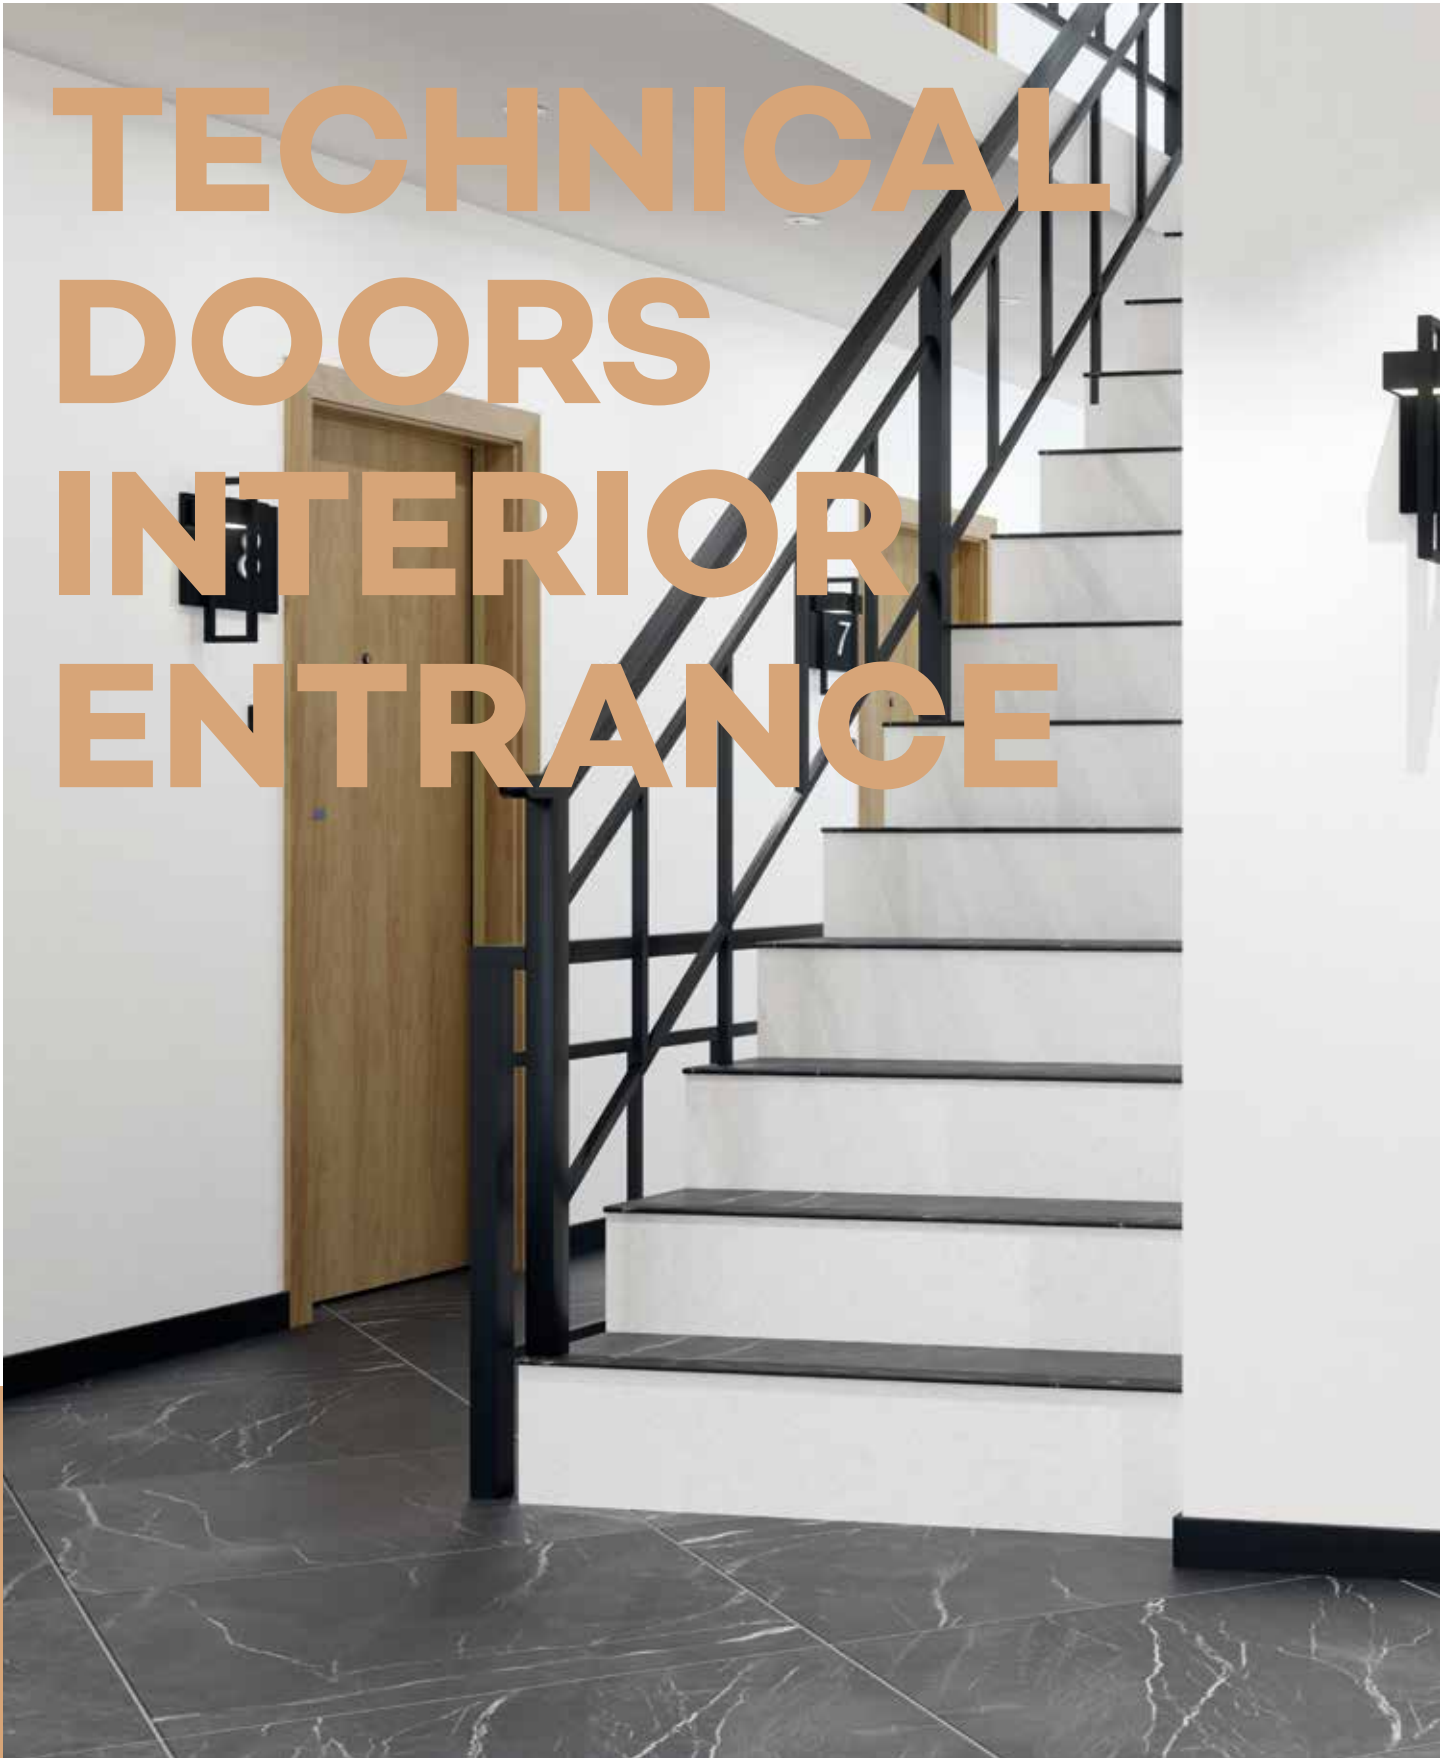

We present interior entrance and technical doors, ideally suited to apartments, offices and specialist rooms. We offer products that meet the highest standards of quality, functionality and safety.



Nefryt RC3 - natural hickory

ENTER / SOLID



ENTER O - elm



ENTER O - acacia

DECORS

DRE CELL 1st gr.	White matt	light gray matt	silver				
DRE CELL 2nd gr.	white (textured)	White pine	siberian elm	sand elm	vintage elm	walnut	premium natur oak
	marrone chestnut textured	evoke oak	caramel walnut	anthracite elm			
3D	grand oak	elm	Polish oak 3D				
CPL Laminate	white	milky white	ashen	dark gray**	concrete 2	gray oak	welsh oak
	acacia	celini walnut	walnut	honey oak	natural hickory	roasted walnut	black ST
	NEW light Casel- la oak	NEW cashmere	NEW anthracite				



* laminate available while stock last

ENTER / SOLID

REBATED DOOR LEAVES,
interior entrance

STANDARD OPTIONS

- door leaf frame made of MDF additionally reinforced with two flat metal bars
- core made of tubular chipboard
- external HDF board - flat or with decorative milling .
- 3 silver screw-in pivot hinges
- straight edge or edge R 2.5 mm (in CPL laminates except for white, milky white, ash grey, cashmere)

REBATED DOOR LEAF MODEL ENTER:

- bottom deadbolt lock adapted for door lock cylinder
- upper deadbolt lock adapted for door lock cylinder
- Door leaves are available in the investment dimension "90E" (clear opening with opened door leaf at 90° = 900mm)

REBATED DOOR LEAF SOLID

- multipoint mortise lock
- hinges reinforced with anti-thrust bolts
- Door leaves are available in the investment dimension "90E" (clear opening with opened door leaf at 90° = 900mm)

APPLICATION

Door leaf ENTER and SOLID can be used as internal entrance door in multifamily and in public utility buildings.

CONSTRUCTION

Construction door leaf frame is made of MDF, additionally reinforced with two flat metal bars. Core is made of perforated chipboard. Door leaf unit has increased acoustic insulation (Rw=32dB). External HDF board is ennobled with DRE-Cell veneer - optional - flat finishing or decorative milling.

For Enter/Solid O models, 0.7 mm CPL laminate is also available - to place an order, please contact the Investment Department.

OPTIONS AVAILABLE WITH EXTRA CHARGE

- viewfinder - included separately
- digital viewfinder DDS1 - separately
- digital viewfinder DDS2 - separately
- stainless steel threshold - 70 mm wide
- resignation from the second lock (Enter)
- dropping seal
- black hinges for ENTER rebated door leaf

NOTE: ENTER O and SOLID O models - doors in CPL laminates as standard with an edge with a radius of R=2.5 mm except for white, milky white, ash, cashmere.

For ENTER/SOLID collection door leaves we recommend fixed door frame ENTER/SOLID or steel door frames .

ENTER/SOLID MODELS



ENTER/ SOLID
0



ENTER/ SOLID
1



ENTER/ SOLID
2



ENTER/ SOLID
3



ENTER/ SOLID
4



ENTER/ SOLID
5



ENTER/ SOLID
6



ENTER/ SOLID
7



ENTER/ SOLID
8



ENTER/ SO-
LID9



ENTER/ SOLID
10



ENTER/ SOLID
11

Door leaves width: single leaf "80"÷"100".

Technical information: door frames: pp. 142-167, accessories: pp. 168-176 and 181, door leaves: pp. 182-195.

ENTER / SOLID



SOLID 23 - acacia



ENTER 0 - concrete 2

DECORS

DRE CELL 1st gr.	White matt	light gray matt	silver				
DRE CELL 2nd gr.	white (textured)	White pine	siberian elm	sand elm	vintage elm	walnut	premium natur oak
	marrone chestnut textured	evoke oak	caramel walnut	anthracite elm			
3D	grand oak	elm	Polish oak 3D				
CPL Laminate	white	milky white	ashen	dark gray**	concrete 2	gray oak	welsh oak
	acacia	celini walnut	walnut	honey oak	natural hickory	roasted walnut	black ST
	NEW light Casel- la oak	NEW cashmere	NEW anthracite				
Inlays	brushed steel	NEW brushed gold	NEW moro matt				

Inlays available only in ENTER/SOLID 21, 22, 23 models

* laminate available while stock last



STANDARD OPTIONS

- door leaf frame made of MDF additionally reinforced with two flat metal bars
- core made of tubular chipboard
- external HDF board - flat or with decorative milling .
- 3 silver screw-in pivot hinges
- straight edge or edge R 2.5 mm (in CPL laminates except for white, milky white, ash grey, cashmere)

REBATED DOOR LEAF MODEL ENTER:

- bottom deadbolt lock adapted for door lock cylinder
- upper deadbolt lock adapted for door lock cylinder
- Door leaves are available in the investment dimension "90E"
- (clear opening with opened door leaf at 90° = 900mm)

REBATED DOOR LEAF SOLID

- multipoint mortise lock
- hinges reinforced with anti-thrust bolts
- Door leaves are available in the investment dimension "90E"
- (clear opening with the door leaf open at an angle of 90° = 900 mm)

APPLICATION

Door leaf ENTER and SOLID can be used as internal entrance door in multifamily and in public utility buildings.

For ENTER/SOLID collection door leaves we recommend fixed door frame ENTER/SOLID or steel door frames .

DOOR FRAME CONSTRUCTION

Construction door leaf frame is made of MDF, additionally reinforced with two flat metal bars. Core is made of perforated chipboard. Door leaf unit has increased acoustic insulation (Rw=32dB). External HDF board is ennobled with DRE-Cell veneer - optional - flat finishing or decorative milling.

NOTE: In models 19 and 20, the cladding is glued into strips with variable grain.

NOTE: In models 21-23 there are made 8 mm wide inserts, placed flush with the door surface on both sides, in the following colors: brushed steel, brushed gold, moro matt (black) - to choose from.

NOTE: ENTER 21-23 and SOLID 21-23 models - door leaves in CPL laminates and edge with R 2,5 mm radius as a standard.

ENTER/SOLID MODELSENTER/ SOLID
12ENTER/ SOLID
13ENTER/ SOLID
14ENTER/ SOLID
15ENTER/ SOLID
16ENTER/ SOLID
17ENTER/ SOLID
18ENTER/ SOLID
19ENTER/ SOLID
20ENTER/ SOLID
21ENTER/ SOLID
22ENTER/ SOLID
23

SOLID RC2



SOLID RC2 - gray oak



SOLID RC2 - acacia

DECORS

CPL Laminates	white	milky white	ashen	dark gray**	concrete 2	gray oak	welsh oak
	acacia	celini walnut	walnut	honey oak	natural hickory	roasted walnut	black ST
	NEW	NEW	NEW				
	light Casella oak	cashmere	anthracite				
Steel door frame colors	white mat RAL 9003	light gray matt RAL 7047	NEW anthracite matt RAL 7016	brown matt RAL 8017	white semi-gloss RAL 9003	light gray semi-gloss RAL 7047	
	brown semi-gloss RAL 8017	beige semi-gloss RAL 1001	black matt RAL 9005	Black semi-gloss RAL 9005	NEW cashmere deep matt	dark gray matt** RAL 7024	DARK GRAY semi-gloss** RAL 7024

The door frames are powder-coated in two gloss levels: matt/fine texture or semi-gloss/smooth. The cashmere color is only available in a deep matt finish.

** laminate, color available while stock last



STANDARD OPTION:

- door leaf frame made of soft wood
- core made of full chipboard
- straight edge
- multipoint mortise lock
- anti-thrust bolts
- 3 triple hinges
- HDF external board with aluminum sheet

SOLID RC2 doors have an acoustic insulation class of $R_w=32\text{dB}$ and burglary resistance of class RC2 according to PN-EN 1627:2012, provided that the door leaf is completed with a steel door frame, a steel threshold and a separately purchased, dedicated set of fittings: door handle, long backplate and cylinder inserts.

APPLICATION

Door leaf SOLID RC2 can be used as internal entrance door in multifamily buildings and in public utility buildings. It can be used together with door frames:

- OSS (steel fixed door frame) information and prices - page 158
- OSR (steel adjustable door frame) information and prices - page 161
- OSH (steel hybrid door frame) information and prices - page 164

OPTIONS AVAILABLE WITH EXTRA CHARGE

- viewfinder - separately
- door leaf „100”
- steel threshold
- ONTARIO door handle
- ONTARIO backplate
- patent insert (price for 2 pc)

OPTIONS WITHOUT ADDITIONAL CHARGE

Doors available in the investment dimension "90E" (clear opening with the door leaf open at an angle of $90^\circ = 900\text{ mm}$)



threefold hinge E878



SOLID RC2

SOLID RC2 MODELS



Nefryt RC3 / RC3 EI30

ANTI BURGLARY, REBATED DOORS
interior entrance

NEW



NEFRYT RC2 - welsh oak



NEFRYT RC2 INTERNAL ENTRANCE DOOR IN EI30 VERSION MEETS THE FOLLOWING REQUIREMENTS:

- anti - burglary class: RC2 (according to PN-EN 1627:2021)
- fire resistance class: EI30
- smoke resistance class: Sa₄, S₂₀₀
- mechanical resistance class: 4
- acoustic insulation class: Rw=42 (-1,-4) dB, R_{A1}, R=39 dB with steel hybrid door frame OSH2, OSH LUX and metal threshold
Rw=41 (-1,-4) dB, R_{A1}, R=38 dB with steel door frame OSS2 and metal threshold

APPLICATION

Anti-burglary internal entrance doors, used in residential buildings, public buildings and collective housing buildings, as well as utility and technical rooms.

STANDARD OPTION

- door leaf frame made of soft wood
- special multi-layer filling
- straight edge
- two multi-pin locks
- 3 triple hinges
- anti-theft pins
- expanding seals in EI 30 version

DOOR FRAMES

- steel hybrid door frame, LUX steel hybrid door frame, fixed steel door frame 2

OPTIONS AVAILABLE WITH EXTRA CHARGE

- steel threshold
- door leaf "100"
- viewfinder
- fire resistant viewfinder.
- DIVA F6 INOX door handle
- F6 INOX rosette
- satin insert sets
- DIVA F8 BLACK door handle
- F8 BLACK rosette
- set of black inserts
- black hinges
- DORMA TS-71 selfcloser
- DORMA TS-90 selfcloser
- silver mortise closer
- black mortise closer

In accordance with the technical conditions that buildings and their location should meet, NEFRYT RC2 doors in EI 30 version should be equipped with a self closer.

DECORS

CPL Laminat 1st group	white	milky white	ashen	dark gray**	concrete 2	gray oak	welsh oak
NEW cashmere	NEW anthracite	celini walnut	walnut	honey oak	natural hickory	roasted walnut	acacia
NEW Kendal Oak natural	NEW light Casel- la oak	black ST			CPL Laminat 2nd group	NEW natural Vicenza oak	NEW gray vicenza oak

* laminate available while stock last

Door leaf width: single leaf "80E"÷"100E".



Nefryt RC3 / RC3 EI30

ANTI BURGLARY, REBATED DOORS

interior entrance

NEFRYT RC3 INTERNAL ENTRANCE DOOR IN EI30 VERSION MEETS THE FOLLOWING REQUIREMENTS:

- anti-burglary class RC3 (according to PN-EN 1627:2012)
- fire resistance class: EI30
- smoke resistance class: $Sa_{4'}$, S_{200}
- mechanical resistance class: 4
- acoustic insulation class: $Rw=42$ (-1,-4) dB, $R_{A1'}$, $R=39$ dB with steel hybrid door frame OSH2, OSH LUX and metal threshold
 $Rw=41$ (-1,-4) dB, $R_{A1'}$, $R=38$ dB with steel door frame OSS2 and metal threshold

APPLICATION

Anti-burglary internal entrance doors, used in residential buildings, public buildings and collective housing buildings, as well as utility and technical rooms.

STANDARD OPTION

- door leaf frame made of soft wood
- special multi-layer filling
- straight edge
- 3-point hook-type strip lock
- 3 triple hinges
- anti-theft pins
- expanding seals in EI 30 version

DOOR FRAMES

- steel hybrid door frame, LUX steel hybrid door frame, fixed steel door frame 2

OPTIONS AVAILABLE WITH EXTRA CHARGE

- steel threshold
- door leaf "100"
- door leaf with additional lock
- viewfinder
- fire resistant viewfinder.
- DIVA F6 INOX door handle
- F6 INOX rosette
- satin cylinder insert
- satin insert sets
- DIVA F8 BLACK door handle
- F8 BLACK rosette
- black cylinder insert
- set of black inserts
- black hinges
- DORMA TS-71 selfcloser
- DORMA TS-90 selfcloser
- silver mortise closer
- black mortise closer

In accordance with the technical conditions that buildings and their location should meet, NEFRYT RC3 doors in EI 30 version should be equipped with a self closer.



NEFRYT RC3 - honey oak

DECORS

CPL Laminate 1st group	white	milky white	ashen	dark gray**	concrete 2	gray oak	welsh oak
NEW cashmere	NEW anthracite	celini walnut	walnut	honey oak	natural hickory	roasted walnut	acacia
NEW Kendal Oak natural	NEW light Casel- la oak	black ST			CPL Laminate 2nd group	NEW natural Vicenza oak	NEW gray vicenza oak

* laminate available while stock last




HYBRID DOOR FRAME OSH2

For doors NEFRYT RC2, NEFRYT RC3, NEFRYT RC2 EI30, NEFRYT RC3 EI30



All frames are designed to be mounted on the finished floor.

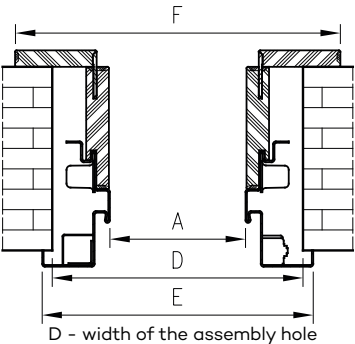

wall thickness range		SP
option	Cmax	
Cmin		
180	205	120
200	225	140
220	245	160
240	265	180
260	285	200
280	305	220
300	325	240
320	345	260
340	365	280

CONSTRUCTION

Steel Hybrid door frames combine the robustness of a metal structure with the added functionality of fully enclosing the door frame using wood-based door frame elements finished with CPL laminate. The hybrid door frame combines a fixed metal door frame, a wood-based panel available in nine widths, and a masking architrave. This solution is dedicated for the wall thickness of 180–365 mm with the masking architrave adjustment up to 25 mm.

Door frame profile dimensions and equipment depend on selected option – door leaf model.

APPLICATION / TYPES OF OSH2 DOOR FRAMES (STEEL HYBRID DOOR FRAMES)

steel hybrid door frame OSH2 for NEFRYT RC2 doors OSH2 for NEFRYT RC3 doors
steel hybrid door frame OSH2 for NEFRYT RC2 EI 30 doors OSH2 for NEFRYT RC3 EI 30 doors


STEEL HYBRID DOOR FRAME OSH2 NEFRYT RC2 AND RC3

- main lock striker sockets
- sockets for 3 triple hinges
- sockets for mounting dowels
- sockets for anti-theft pins
- reinforcement for door closer
- self-extinguishing TPE gasket

STEEL HYBRID DOOR FRAME OSH2 NEFRYT RC2 EI30 AND RC3 EI30

- main lock striker sockets
- sockets for 3 triple hinges
- sockets for mounting dowels
- sockets for anti-theft pins
- reinforcement for door closer
- self-extinguishing TPE gasket
- swelling seal in the lintel

symbol width.	A	D	E	F
„80E“	817	930 ± 5	950	1003
„90E“	917	1030 ± 5	1050	1103
„100E“	1017	1130 ± 5	1150	1203

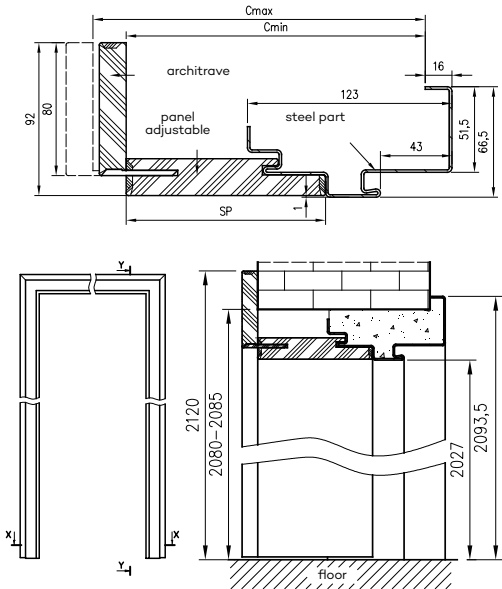

Price of the door frame = price of the metal part + price of the extension panel with a masking architrave

AVAILABLE COLOURS

The door frames are powder-coated in two gloss levels: matt/fine texture or semi-gloss/smooth. The cashmere color is only available in a deep matt finish.

white matt	light gray matt	brown matt	white semigloss	light gray semi-gloss	semigloss brown	semi-gloss beige ***	cashmere deep matt	anthracite matt
RAL 9003	RAL 7047	RAL 8017	RAL 9003	RAL 7047	RAL 8017	RAL 1001		RAL 7016
							dark gray matt*	DARK GRAY semi-gloss*
							RAL 7024	RAL 7024
								black matt
								RAL 9005
								Black semi-gloss
								RAL 9005

*** beige colour is available only in semi-gloss

*color available while stock last

STEEL HYBRID DOOR FRAME OSH LUX

For doors NEFRYT RC2, NEFRYT RC3, NEFRYT RC2 EI30, NEFRYT RC3 EI30

NEW

CONSTRUCTION:

Steel hybrid door frames combine the durability of a metal structure with the added functionality of fully enclosing the door frame using wood-based door frame elements finished with CPL laminate. The hybrid door frame combines a fixed-width metal door frame, a wood-based panel available in nine widths, and a masking architrave. Once the panel is installed, part of the steel door frame is invisible from the hallway/staircase. This solution allows for door frame thicknesses of 180-365 mm and adjustments using the architrave up to 25 mm.

Door frame profile, its dimensions and equipment depend on selected option - door leaf model.

APPLICATION / TYPES OF OSH LUX DOOR FRAMES (STEEL HYBRID DOOR FRAMES LUX)

Steel hybrid door frame OSH LUX for NEFRYT RC2 doors	OSH LUX for NEFRYT RC3 doors
Steel hybrid door frame OSH LUX for NEFRYT RC2 EI30 doors	OSH LUX for NEFRYT RC3 EI30 doors




All frames are designed to be mounted on the finished floor.

OSH LUX (STEEL HYBRID DOOR FRAME) NEFRYT RC2 AND RC3 AS A STANDARD


- main lock striker sockets
- sockets for 3 triple hinges
- sockets for mounting dowels
- sockets for anti-theft pins
- reinforcement for door closer
- self-extinguishing TPE gasket

OSH LUX (STEEL HYBRID DOOR FRAME) NEFRYT RC2 EI30 AND RC3 EI30 AS A STANDARD


- main lock striker sockets
- sockets for 3 triple hinges
- sockets for mounting dowels
- sockets for anti-theft pins
- reinforcement for door closer
- self-extinguishing TPE gasket
- swelling seal in the lintel



D - width of the assembly hole

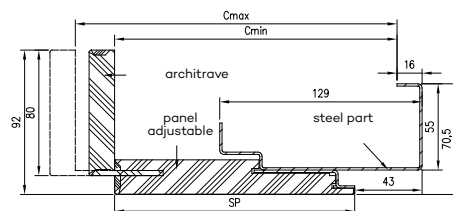

symbol width.	A	D	E	F
„80E“	816	930 ± 5	957	1000
"90E"	916	1030 ± 5	1057	1100
„100E“	1016	1130 ± 5	1157	1200

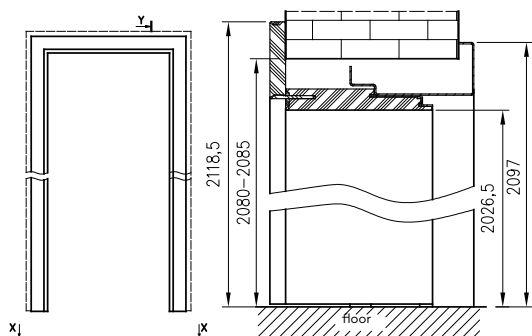


wall thickness range		SP
option Cmin	Cmax	
180	205	153
200	225	173
220	245	193
240	265	213
260	285	233
280	305	253
300	325	273
320	345	293
340	365	313

Price of the door frame = price of the metal part + price of the extension panel with a masking architrave

AVAILABLE COLOURS

The door frames are powder-coated in two gloss levels: matt/fine texture or semi-gloss/smooth. The cashmere color is only available in a deep matt finish.

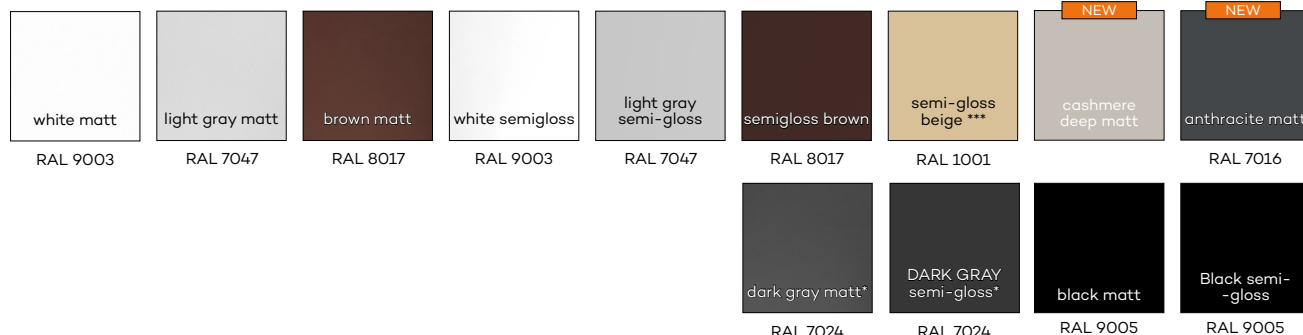

*** beige colour is available only in semi-gloss

*color available while stock last

STEEL FIXED DOOR FRAME

For doors NEFRYT RC2, NEFRYT RC3, NEFRYT RC2 EI30, NEFRYT RC3 EI30

CONSTRUCTION

Steel door frames are made of 1.5 mm thick low-carbon steel sheet, protected with a protective organic varnish coating. The door frame consists of two posts: a striker post and a hinge post, and a lintel, permanently connected by welding. The hinge posts are equipped with hinge sockets, while the striker posts have cutouts for the tongue and bolts of the lock dedicated to the door leaf (the set includes a lintel seal). The profile of the door frame, its dimensions, equipment and colors depend on the selected variant - the type of door for which the door frame is to be used.

APPLICATION / TYPES OF OSS2 DOOR FRAMES (STEEL FIXED DOOR FRAMES)


steel fixed door frames OSS2 for doors Nefryt RC2
steel fixed door frames OSS2 for doors Nefryt RC2 EI30
steel fixed door frames OSS2 for doors Nefryt RC3
steel fixed door frames OSS2 for doors Nefryt RC3 EI30

STEEL FIXED DOOR FRAMES OSS2 NEFRYT RC2 AND RC3 AS A STANDARD

- main lock striker sockets
- sockets for 3 triple hinges
- sockets for mounting dowels
- sockets for anti-theft pins
- reinforcement for door closer
- self-extinguishing TPE gasket

STEEL FIXED DOOR FRAMES OSS2 NEFRYT RC2 EI30 AND RC3 EI30AS A STANDARD

- main lock striker sockets
- sockets for 3 triple hinges
- sockets for mounting dowels
- sockets for anti-theft pins
- reinforcement for door closer
- self-extinguishing TPE gasket
- swelling seal in the lintel

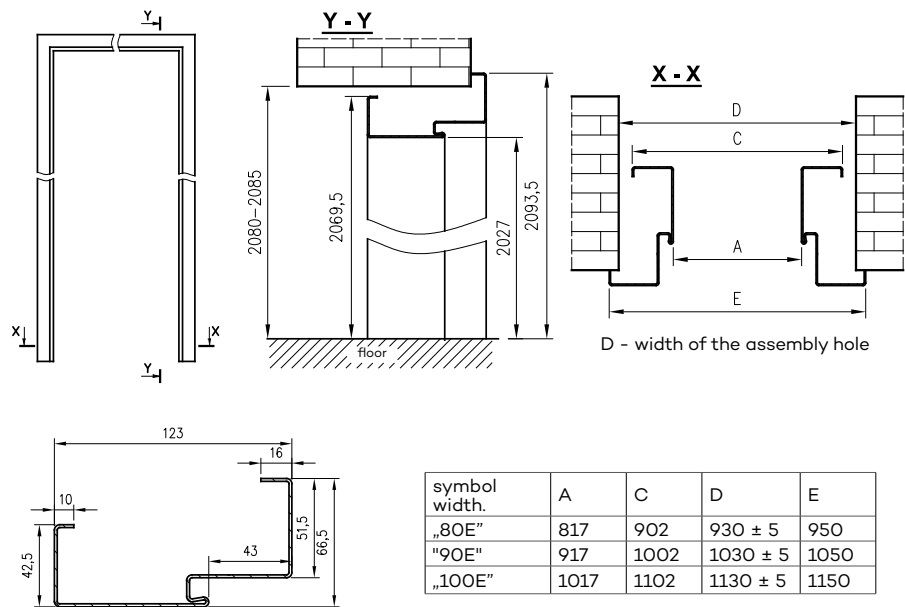

symbol width.	A	C	D	E
"80E"	817	902	930 ± 5	950
"90E"	917	1002	1030 ± 5	1050
"100E"	1017	1102	1130 ± 5	1150

AVAILABLE COLOURS

The door frames are powder-coated in two gloss levels: matt/fine texture or semi-gloss/smooth. The cashmere color is only available in a deep matt finish.

white matt

RAL 9003

light gray matt

RAL 7047

brown matt

RAL 8017

white semigloss

RAL 9003

light gray semi-gloss

RAL 7047

semigloss brown

RAL 8017

semi-gloss beige ***

RAL 1001

cashmere deep matt

RAL 7016

anthracite matt

RAL 7016

dark gray matt*

RAL 7024

DARK GRAY semi-gloss*

RAL 7024

black matt

RAL 9005

Black semi-gloss

RAL 9005



*** beige colour is available only in semi-gloss

*color available while stock last

DOOR PANELS - NEFRYT RC2 and RC3

ANTI BURGLARY, REBATED DOORS
interior entrance

AVAILABLE COLOURS

 light casella oak H1367 ST 40	 natural Kendal Oak H3170 ST 12	 natural Vicenza oak H3157 ST 12	 gray vicenza oak H3158 ST 19	 natural hickory H3730 ST 10
---	---	--	--	--

NEW



Door panel with 90° connection



Door panel with 0° connection



Optional vertical grain direction on a top panel - for 90° connection



Optional vertical grain direction on a top panel - for 0° connection

APPLICATION

Door panels made of flame-retardant wood-based panels with a fire reaction class of B-s1, d0 in accordance with EN-13501-1. Suitable for use on escape routes (corridors and stairwells). Available in two versions of connecting the side angle panels to the top panel - 0 and 90°. The door panels are adapted for installation with hybrid door frames (OSH2 and OSH LUX) from the Nefryt collection of interior entrance doors.

Details regarding orders and quotes are available from DRE Investment Department.

* The decorative coating on the panels is matched in pattern and color to the CPL laminates of the same name used on Nefryt doors. Due to different production technologies, these two types of coating may differ slightly.

ATHOS



ATHOS 10 - white



ATHOS 10 - walnut

DECORS

CPL Laminat	white	milky white	ashen	dark gray*	concrete 2	gray oak	welsh oak
	acacia	celini walnut	walnut	honey oak	natural hickory	roasted walnut	light Casella oak
	NEW	NEW					
	cashmere	anthracite					

* laminate available while stock last

TECH
CPL

P.POŻ.

SMOKE PROOF

32 dB

. Width of door leaf: single leaf "80"÷"110".

ATHOS FIRE RESISTANT DOORS

TECHNICAL REBATED DOORS,
interior entrance

ATHOS TECHNICAL DOORS MEET THE FOLLOWING REQUIREMENTS:

- fire resistance class: EI30 with a steel door frame
- fire resistance class: EI30 with a wooden door frame
- smoke proof class: Sa, S₂₀₀
- mechanical resistance class: 3
- sound insulation class: RW=32 dB

APPLICATION

Interior entrance fire resistant doors, are used in residential housing, public utility buildings and collective residential buildings, as well as commercial and technical premises.

STANDARD OPTION

- door leaf frame made of soft wood
- core made of full chipboard
- straight edge
- single-point mortise lock adapted for cylinder lock
- 3 triple hinges
- anti-theft pins

DOOR FRAMES

- steel fixed door frame p. 158
- steel adjustable door frame p. 161
- steel hybrid door frame p. 164
- wooden door frame p. 133, technical drawings p. 186

OPTIONS AVAILABLE WITH EXTRA CHARGE

- DORMA TS-71 selfcloser
- DORMA TS-90 selfcloser
- GEZE TS 2000 selfcloser
- door leaf "100" (for 0.7 mm laminate)
- door leaves "100" "110" (for 0.15-0.2 mm laminates)
- viewfinder
- wooden threshold

In order to comply with the conditions of the National Technical Assessment, doors with fire resistance EI 30 should be equipped with a selfcloser.

ATTENTION: The price of the leaf does not include the price of a steel frame or a wooden frame.

Door leaves with a width of "110" in 0.7 mm laminates available after individual pricing by the Contract Department.

CONSTRUCTION

OD ATHOS wooden door frame is made of glued pine wood, covered with CPL O, 15-0.2 mm laminate on the exposition side. Frame beams, with a fixed width of 100mm, are cut at an angle of 90 °. An intumescent gasket with fire-resistant properties is glued in the channel, milled in the notch of the beams.

APPLICATION

OD ATHOS wooden door frames are dedicated to Athos door leaves, together with which they constitute a partition with fire resistance EI₁ 30. Equipped with a fixed threshold or with a dropping seal, without a fixed threshold, Rw = 32 dB

WOODEN DOOR FRAME for ATHOS

SET CONTAINS

- Main beams (lintel, latch plate beam with the main lock catch and main beam with the hinges with milled holes for the yokes and three-part hinges and mounted anti-theft bolt sockets), rebate gasket, three hinges (middle part of the three-part hinge) + 3 hinge yokes, a set of elements to be assembled door frame according to the attached instructions. The door frames are packed in cardboard boxes.

Assortment of wooden frames:

- OD ATHOS - for Athos door with a fixed threshold
- OD ATHOS UO - for Athos doors with a dropping seal

Technical information, drawings, dimension tables p. 186



OLIMP 10 - white



OLIMP 10 - gray oak

DECORS

CPL Laminat	white	milky white	ashen	dark gray*	concrete 2	gray oak	welsh oak
	acacia	celini walnut	walnut	honey oak	natural hickory	roasted walnut	cashmere
	NEW light Casella oak	NEW anthracite					

* laminate available while stock last

OLIMP MODELS



OLIMP 20



OLIMP 30



OLIMP 40

TECH

CPL

P.POŻ.

32 dB

NOTE: In door leaf with fire-resistance EI30 there are used three triple hinges, while in door leaf with fire resistance EI60 there are used VX7939 hinges.

32 dB

Acoustic sound insulation class for single leaf door $R_w=32$ dB

OLIMP FIRE RESISTANT DOORS

TECHNICAL REBATED DOORS,
internal entrance of HALSPAN system

STANDARD OPTIONS

- core made of Halspan chipboard 44 mm in EI30 or 54 mm in EI 60 with additional pine wood strips attached circumferentially
- straight edge, rounded glazing frame, transparent fire-resistant glass (variable width depending on the size of the door leaf)
- intumescent smoke-proof gasket
- 3 hinges cylinder lock
- dropping seal

OPTIONS AVAILABLE WITH EXTRA CHARGE

- viewfinder
- DORMA TS-71 selfcloser
- DORMA TS-90 selfcloser
- GEZE TS 2000 selfcloser
- fire-resistant ventilation grille.

APPLICATION

Fire-resistance doors are used as interior entrance doors in residential housing, public utility buildings and collective residential buildings.

In order to comply with the conditions of the National Technical Assessment self closer should be applied in doors with fire-resistance EI30 and EI60.



self closer
GEZE TS2000



self closer
DORMA TS-71



self closer
DORMA TS-90 impuls



fire-resistant ventilation grille.

OLIMP DOOR FRAMES

ANTI BURGLARY, REBATED, FIRE-RESISTANT DOORS
interior entrance

FIXED STEEL DOOR FRAME OLIMP EI 30, EI 60

DOOR FRAME CONSTRUCTION
Steel door frame made of 1.5 mm thick structural carbon steel sheet, welded construction, powder coated.

APPLICATION
Door frame is applied to the interior entrance fire-resistance doors OLIMP EI30 and EI60.

STANDARD OPTIONS

- 3 hinges
- gasket with enhanced flame-resistance properties

AVAILABLE COLOURS
The door frames are powder-coated in two gloss levels: matt/fine texture or semi-gloss/smooth. The cashmere color is only available in a deep matt finish.



*** beige color available only in semi-gloss												
black matt	Black semi-gloss	white matt	light gray matt	brown matt	white semi-gloss	light gray semi-gloss	semigloss brown	semi-gloss beige ***	anthracite matt	cashmere deep matt	dark gray matt*	dark gray semi-gloss*
RAL 9005	RAL 9005	RAL 9003	RAL 7047	RAL 8017	RAL 9003	RAL 7047	RAL 8017	RAL 1001	RAL 7016		RAL 7024	RAL 7024
*color available while stock last												

Technical information, drawings, dimension tables p.187

FIRE-RESISTANT WOODEN DOOR FRAME for OLIMP EI 30, EI 60

CONSTRUCTION
Fixed wooden door frame with a cross-section of 54x100 mm (54x120mm for Olimp EI 60 doors) made of coniferous plywood laminated with a 0.2mm CPL laminate in the color of the door leaf.

APPLICATION
The door frame is used for interior fire-resistant entrance doors:
OD OLIMP EI30 wooden door frame - for Olimp EI 30 doors
OD OLIMP EI60 wooden door frame - for Olimp EI 60 doors

STANDARD OPTIONS

- 3 hinges
- gasket with enhanced flame-resistance properties
- latch strike plate
- mounting kit

AVAILABLE COLOURS



* laminate available while stock last

Technical information, drawings, dimension tables p.186

ENTER ACOUSTIC Rw 32 dB

REBATED DOORS
interior entrance

ENTER ACOUSTIC TECHNICAL DOORS MEET THE FOLLOWING REQUIREMENTS:

- mechanical resistance class: 3
- sound insulation class Rw = 32dB

APPLICATION

Door leaf ENTER ACOUSTIC are designed to be used as interior entrance door in multifamily buildings and in public utility buildings

STANDARD OPTION:

- door leaf frame made of MDF additionally reinforced with two flat metal bars
- core made of tubular chipboard
- flat external HDF board
- dropping seal
- 3 silver screw-in pivot hinges
- R2.5mm edge (available only in CPL laminates except for white, milky white, ash grey, cashmere) or straight edge
- bottom deadbolt lock adapted for door lock cylinder
- Doors available in the investment dimension "90E" (clear opening with the door leaf open at an angle of 90° = 900 mm)

DOOR FRAMES:

- steel hybrid door frame p. 164
- steel adjustable door frame p. 161
- steel fixed door frame p. 158
- fixed rebated door frame p. 142
- adjustable door frame with architrave T80, T63 page 146

OPTIONS AVAILABLE WITH EXTRA CHARGE:

- Viewfinder - supplied separately
- door leaves "110" except for 0.7 mm laminates
- black fittings for rebated door leaf

Door leaves with a width of "110" in 0.7 mm laminates available after individual pricing by the Contract Department.



ENTER O AKUSTIK - natural hickory

DECORS

				White matt	light gray matt	silver	DRE CELL 1st gr.	
white (textured)	White pine	siberian elm	sand oak	premium natur oak	vintage oak	walnut	DRE CELL 2nd gr.	
			anthracite elm	marrone chestnut textured	evoke oak	caramel walnut		
				grand oak	elm	Polish oak 3D	3D	
* laminate available while stock last								
white	milky white	ashen	dark gray*	concrete 2	gray oak	welsh oak	acacia	CPL Laminate
celini walnut	walnut	honey oak	natural hickory	roasted walnut	black ST	NEW light Casella oak	NEW cashmere	NEW anthracite



GALLA



GALLA 1 grooved transparent



GALLA 15 - grooved glass



DECORS



GALLA 1
transparent



GALLA 1
decormat



GALLA 1
decormat brown



GALLA 1
decormat graphite



GALLA 14
transparent



GALLA 15
transparent



GALLA 14
grooved glass

APPLICATION

Glass door leaf are used as interior doors in residential housing, public utility buildings and collective residential buildings.

The leaf is a glass pane, made of safe, uniform tempered glass, 8 mm thickness, with holes for mounting:

- hinges and lock in the opening doors
- round door handle and hardware adapted for sliding system door leaf
- GALLA 14, 15 pattern is painted using the screen printing technique


SELECTION OF LOCKS FOR GLASS DOORS

Glass door locks are universal, they can be configured for left or right doors. In the case of locks in the "WC" version (with a bathroom knob) - the term "left" or "right" refers to the direction of door opening.

OPTIONS AVAILABLE WITH EXTRA CHARGE

- ventilation undercut in the opening doors (in "80" and "90" meet ventilation requirements)

Galla doors have different glass sides (does not apply to Galla 1 transparent) **OBVERSE**



REVERSE




Fig. 1-2 Bathroom door opening, select left lock

fig. 1 right door leaf /outside lock

Fig. 2 left door leaf /outside lock







Fig. 3-4 Door opening to the corridor, select the right lock

fig. 3 right door leaf/blockade inside

fig. 4 left door leaf/blockade inside



HARDWARE



silver lock



silver toilet lock***



silver simple key lock



silver cylinder lock**



silver hinge



steel lock



steel toilet lock***



steel simple key lock



steel cylinder lock**



steel hinge



black lock



black toilet lock***



black simple key lock



black cylinder lock**



hinge black

** It is necessary to purchase cylinder insert 21/26 separately (see details in the above table)

** Toilet lock - selection of toilet lock see details above

DOOR FRAMES



Door frames are an essential complement to door leaves, providing stability, durability, and an aesthetically pleasing finish. We also offer a WaterProof door frame, designed for rooms exposed to moisture, such as bathrooms, laundry rooms, and utility rooms.



NESTOR 10 - sand oak, adjustable Water Proof door frame

FIXED REBATED

DOOR FRAMES

CONSTRUCTION

Fixed door frame is made of high-quality wood-based panels and is covered with ecological, wood-like decorative DRE-Cell foil, 3D foil, CPL laminate 0.15 - 0.2 mm, Finish foil or painted. The door frame has a fixed width of 100 mm.

APPLICATION

Fixed door frame can be used in the following types of doors:

- ENTER entrance doors (equipped with 3 ø 13,5 mm hinges and additional upper latch plate)
- SOLID entrance doors (equipped with 3 ø 13,5 mm hinges and 4 hooks for the latch and latches of the flat multi-point lock)
- glass doors ("OPC") they are equipped with two hinges ø 15 mm, special latch plate and rubber seal strip)
- other rebated doors (using 2 or 3 hinges ø 13.5 mm, 3 hinges for frame construction and panel construction doors with a width of "90" and wider)

For the fixed and fixed SOFT door frames we use masking architraves.

THE SET CONTAINS



Main beam (one horizontal and two vertical elements), door seal, a set of hinges, all necessary components for the installation of door frames in accordance with the supplied instruction. Door frames are packed in cardboard boxes.



Fixed door frame



fixed door frame SOFT

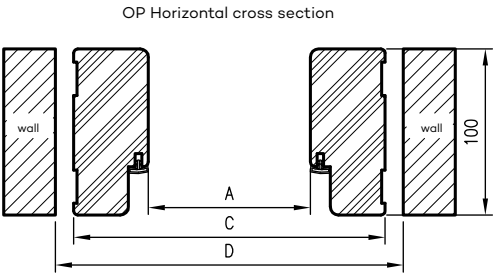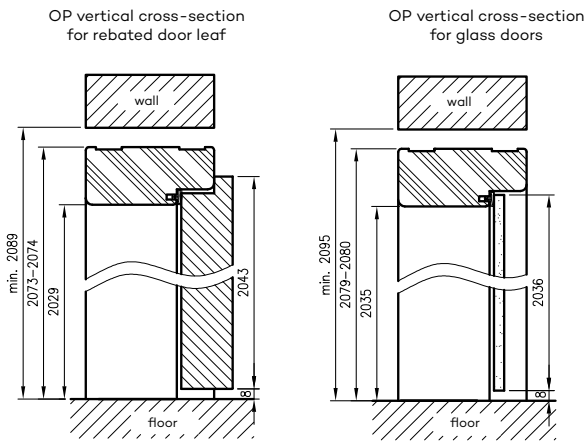

required height of wall passage 2089 mm
(2095 mm for glass doors)

OPTIONS AVAILABLE WITH EXTRA CHARGE

- ENTER door frame (with deadbolt catch)
- SOLID door frame
- door frame for double leaf doors: +30%

for single-leaf doors

	A	C	D
"60"	600	688	712
"70"	700	788	812
"80"	800	888	912
"90"	900	988	1012
"90E"	904	992	1016
"100"	1000	1088	1112
"110"	1100	1188	1212

* door frames for glass doors with width "60"- "90"
D - required width of wall passage

for rebated door leaf
double-leaf doors

	A	C	D
„100d“	1035	1123	1147
„110d“	1135	1223	1247
„120“	1235	1323	1347
„130“	1335	1423	1447
„140“	1435	1523	1547
„150“	1535	1623	1647
„160“	1635	1723	1747
„170“	1735	1823	1847
„180“	1835	1923	1947
„190“	1935	2023	2047
„200“	2035	2123	2147

FIXED DOOR FRAMES

NON-REBATED



CONSTRUCTION

Fixed non-rebated door frame is made of high-quality wood-based board and it is coated with ecological, wood-like decorative DRE-Cell veneer, 3D veneer, 0,15 - 0,20 mm CPL or painted.
Door frames has fixed width of 100 mm.


APPLICATION

Fixed non-rebated door frame can be applied to all DRE collections which are available in non-rebated option.

SET CONTAINS


Main beam (one horizontal and two vertical elements), door seal, a set of hinges, all necessary components for the installation of door frames in accordance with the supplied instruction. Door frames are packed in cardboard boxes.

OPB Horizontal cross section

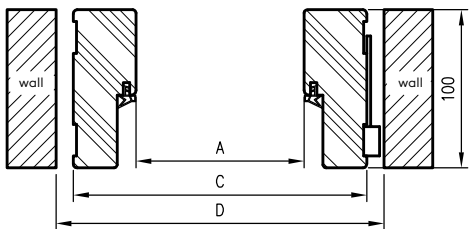

D - required wall opening 2097 mm

OPB vertical cross-section

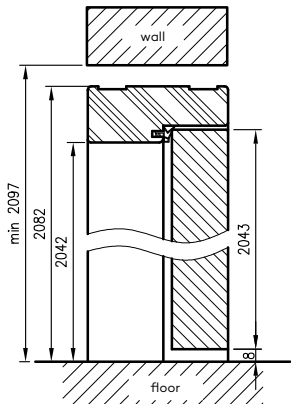

OPTIONS AVAILABLE WITH EXTRA CHARGE

- Price of the double-leaf door frame: + 50% (if 3 hinges are used, there is extra charge)
- Additional payment for the third hinge Estetic 80

for double-leaf doors

	A	C	D
„120“	1274	1354	1380
„130“	1374	1454	1480
„140“	1474	1554	1580
„150“	1574	1654	1680
„160“	1674	1754	1780
„170“	1774	1854	1880
„180“	1874	1954	1980

for single-leaf doors

	A	C	D
„60“	627	707	730
„60N“	607	687	710
„70“	727	807	830
„70N“	707	787	810
„80“	827	907	930
„80N“	807	887	910
„90“	927	1007	1030
„90N“	907	987	1010
„100“	1027	1107	1130
„100N“	1007	1087	1110

„xN“ - width standard for selected non-rebated panel and frame construction door leaves - single-leaf

WATERPROOF DOOR FRAME

ADJUSTABLE REBATED DOOR FRAMES

NEW



DECORS

DRE CELL	White matt	light gray matt	cashmere matt	black matt 2
	White pine	sand elm	vintage elm	evoke oak

CHECK ALSO!

The new **80mm** high **LPP6W** and **100mm** high **LPP7W** skirting boards are made with DRE WaterProof technology. They fit perfectly with the WaterProof door frame. More on page 180 of the catalogue.

NEW



WATERPROOF DOOR FRAME

ADJUSTABLE REBATED DOOR FRAMES



Horizontal section of Waterproof door frame (OR)

DOOR FRAME CONSTRUCTION

DRE Water Proof adjustable rebated door frame is made of a composite material, a combination of wood flour with plastics and additives that improve durability – all in a strictly controlled extrusion process.


APPLICATION

The adjustable rebated door frame is compatible with all DRE collections in the rebated, turn-hinged version. It's ideal for rooms where the door frame is at risk of moisture, such as bathrooms and laundry rooms. DRE Water Proof door frame won't swell or deform, even after prolonged, continuous contact with water! This is thanks to innovative materials and a precise manufacturing process.

DRE Water Proof door frame is visually identical to MDF models. It features the same decorative finishes. This allows you to match door frames with different properties and use them in the same space while maintaining a consistent aesthetic.


THE SET CONTAINS

Main beam (one horizontal and two vertical elements), door seal, a set of hinges, all necessary components for the installation of door frames in accordance with the supplied instruction. Door frames are packed in cardboard boxes.

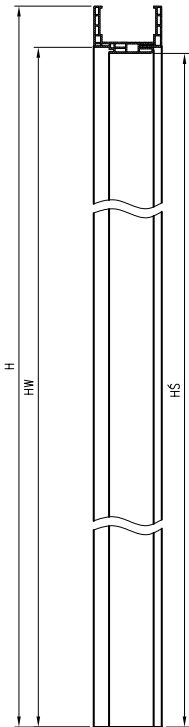

Parameters of door height variants

standard height	H	HŚ	HW
PL "2043"	2121	2029	2041

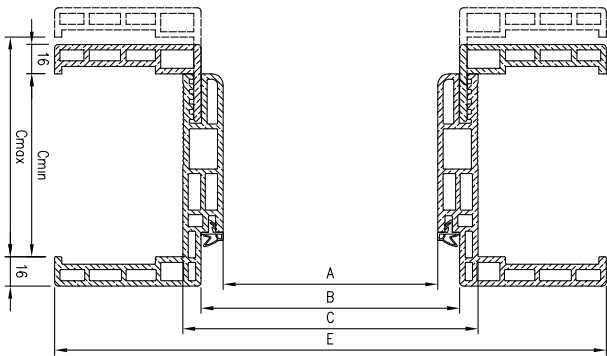

Width of the door frame of a single-leaf rebated door

symbol width.	"60"	"70"	"80"	"90"	"100"
A	602	702	802	902	1002
B	626	726	826	926	1026
C	646	746	846	946	1046
D	680	780	880	980	1080
E	786	886	986	1086	1186

We will soon be increasing the functionality of Water Proof door frames and expanding the color range.

More on the website

www.dre.pl/hydroproof



ADJUSTABLE DOOR FRAMES

REBATED WITH ARCHITRAVE T80 OR T63

CONSTRUCTION

The adjustable door frame with T80 or T63 architrave is equipped with architraves with small rounding radii of the cross profile. It is made of high-quality wood-based board. On the exposure side it is completely covered with a wood-like DRE-Cell Decor decorative foil, 3D foil, CPL laminate 0.15 - 0.2 mm thick or painted**. Its design allows for use on walls with a thickness of 60 - 325 mm. Connection at an angle of 90° is available with a T80 architrave in the following colors: **white matt, light grey matt, cashmere matt, warm grey matt, dark olive matt, dark blue matt, sage oak, black matt 2, white acrylic painted UV, white pine, sand oak, vintage oak, Polish oak 3D.**

**NOTE: To ensure the highest quality of painted door frames, before painting process they are coated with special material which constitutes solid base.

APPLICATION

Adjustable door frame can be applied for:

- interior door leaves - rebated and for glass door leaves (ORC)
- ENTER entrance door (includes 3 hinges ø 13.5 mm, additional catcher - extra charge)

SET CONTAINS

Main beam (one horizontal and two vertical elements together with masking elements), door seal, set of hinges, all necessary components for the installation of door frames in accordance with the supplied instruction. Door frames are packed in cardboard boxes. Door frames used as a set with frame construction doors and door frames with size "90" and wider, should be equipped with three hinges. Door frames for glass door "ORC" are equipped with two hinges ø 15 mm, special latch plate and rubber seal strip.

OPTIONS AVAILABLE WITH EXTRA CHARGE

Price of adjustable door frame for double leaf door: +30%

*** The door frame for the wall O60-O85 has a shallower groove on the side of the movable angle,

during assembly it is necessary to shorten the tongue of the architrave.

- Extra charge for a 90° connection angle in white matt, light grey matt, cashmere matt, warm grey matt, dark olive matt, dark blue matt, sage oak, black matt 2, white acrylic UV varnish, white pine, sand oak, vintage oak, 3D Polish oak -
- Extra charge for reinforcement for self closer applies to door frames with a connection angle of 45° -



Selected configurations of adjustable rebated door frames are available from stock in the following colours: evoke oak, white matt, alpine white, white acrylic UV varnish.



OR (adjustable rebated door frame) with T63




OR (adjustable rebated door frame) with T80

wall thickness	
Cmin	Cmax
60***	85
80	105
100	125
120	145
140	165
160	185
180	205
200	225
220	245
240	265
260	285
280	305
300	325


ADJUSTABLE DOOR FRAMES

REBATED WITH ARCHITRAVE T80 OR T63


OR/ORC cross-section with T63 architrave




OR/ORC cross-section with T80 architrave



vertical cross-section of rebated door leaf with OR

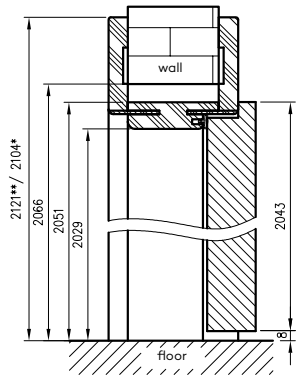


OR/ORC horizontal cross-section

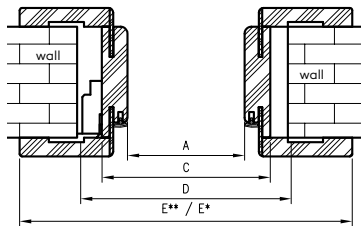


D - required width of wall passage

Adjustable door frame connection at an angle of 90° T80 architrave



90° angle connection available in white matt, light grey matt, cashmere matt, warm grey matt, dark olive matt, dark blue matt, sage oak (structure), matt black 2, acrylic UV painted white, white pine, sand oak, Polish oak 3D, vintage oak.

vertical cross-section of glass doors with ORC (adjustable door frame for glass doors)

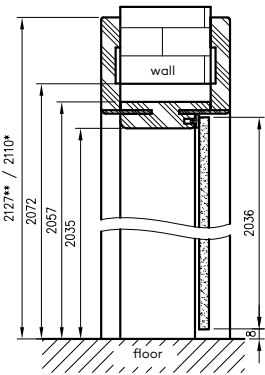

required wall passage height 2066 mm (2072 mm for glass doors)

for double-leaf doors

	A	C	D	E**	E*
100d	1035	1079	1115	1219	1185
110d	1135	1179	1215	1319	1285
120	1235	1279	1315	1419	1385
130	1335	1379	1415	1519	1485
140	1435	1479	1515	1619	1585
150	1535	1579	1615	1719	1685
160	1635	1679	1715	1819	1785
170	1735	1779	1815	1919	1885
180	1835	1879	1915	2019	1985
190	1935	1979	2015	2119	2085
200	2035	2079	2115	2219	2185

* dimension refer to door frame with T63 architrave

** dimension refer to door frame with T80 architrave

for single-leaf doors

	A	C	D	E**	E*
60	602	646	680	786	752
70	702	746	780	886	852
80	802	846	880	986	952
90	902	946	980	1086	1052
90E	906	950	984	1090	1056
100	1002	1046	1080	1186	1152
110	1102	1146	1180	1286	1252

wall thickness	
Cmin	Cmax
60***	85
80	105
100	125
120	145
140	165
160	185
180	205
200	225
220	245
240	265
260	285
280	305
300	325

2nd group of CPL - natural halifax oak laminate. Black ST decor, CPL cashmere laminate, light casella oak, available only with T80 architrave.

ADJUSTABLE DOOR FRAMES

NON-REBATED WITH ARCHITRAVE T80 OR T63

CONSTRUCTION

The adjustable, non-rebated door frame is made of high-quality wood-based board. wood-based. The exposed side is fully covered with DRE-Cell Decor wood-like decorative foil, 3D foil, CPL laminate or painted**. Its design is adapted to a door leaf thickness of 40 mm and allows for use in walls with a thickness of 75 - 325 mm. Available in **white matt, light grey matt, cashmere matt, warm grey matt, dark olive matt, dark blue matt, sage oak (structure), black matt2, acrylic UV painted white, white pine, sand oak, vintage oak, Polish oak 3D, varnished white, varnished black, decors from the LUX collection** possible selection of beam connection angle 90° with T80 architraves.

**NOTE: To ensure the highest quality of painted and lacquered door frames, before varnishing or painting process they are coated with special material which constitutes solid base.

APPLICATION

The adjustable non-rebated door frame with Estetic 80 hinges is applicable to all DRE collections in the non-rebated version with Estetic 80 hinges.

SET CONTAINS

Main beam (one horizontal and two vertical elements) with wide angular architrave (80 mm) with small rounding angles of the cross-section profile (R2), door seal, a set of hinges, all necessary components for the instalation of door frames in accordance with the supplied instruction. Door frames are packed in cardboard boxes.



Selected configurations of adjustable non-rebated door frames are available from stock.

EXTRA CHARGE OPTIONS


- Prices include 2 hinges with assembly plates.
- Price of a door frame for double doors: +50% (additional charge when using 3 Estetic 80 hinges)
 - Extra charge for third hinge Estetic 80
 - Extra charge for a 90° connection angle in the following colours: white matt, light grey matt, cashmere matt, warm grey matt, dark olive matt, dark blue matt, sage oak (structure), black matt2, white acrylic UV varnish, white pine, sand oak, 3D Polish oak, vintage oak, white varnish, black varnish and decors from the LUX collection, acrylic laminates (standard gloss, metallic gloss, standard matt)
 - Extra charge for reinforcement for the self closer applies to door frames with a connection angle of 45°

Cmin	Cmax
75	100
100	125
120	145
140	165
160	185
180	205
200	225
220	245
240	265
260	285
280	305
300	325


ADJUSTABLE DOOR FRAMES

NON-REBATED WITH ARCHITRAVE T80 OR T63


ORB cross-section 095-300

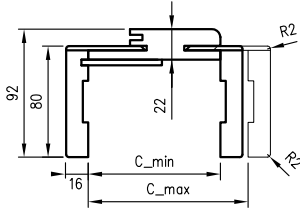


ORB cross-section 075



ORB horizontal cross-section

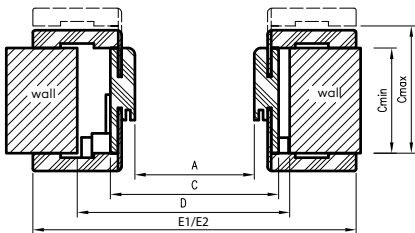


Vertical section of the door non-rebated door leaf

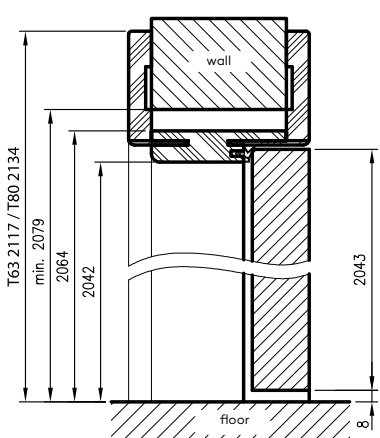


required wall passage height 2079 mm

ORB connection at 45



Adjustable non-rebated door frame connection at an angle of 90°** T80 architrave



** 90° connection available in white matt, light grey matt, cashmere matt, warm grey matt, dark olive matt, dark blue matt, sage oak (structure), black matt2, white acrylic UV painted, white pine, sand oak, 3D Polish oak, white varnish, black varnish and decors from the LUX collection.

D - required width of wall opening

E1 - dimension for T63 architrave

E2 - dimension for T80 architrave

* 075-100 door frame has a different cross-section, for wall thicknesses of 75-95 mm it will be necessary to shorten the tongue of the movable architrave yourself.

for double-leaf doors

	A	C	D	E1	E2
120	1274	1318	1350	1424	1458
130	1374	1418	1450	1524	1558
140	1474	1518	1550	1624	1658
150	1574	1618	1650	1724	1758
160	1674	1718	1750	1824	1858
170	1774	1818	1850	1924	1958
180	1874	1918	1950	2024	2058

for single-leaf doors

	A	C	D	E1	E2
"60"	627	671	700	777	811
"60N"	607	651	680	757	791
"70"	727	771	800	877	911
"70N"	707	751	780	857	891
"80"	827	871	900	977	1011
"80N"	807	851	880	957	991
"90"	927	971	1000	1077	1111
"90N"	907	951	980	1057	1091
"100"	1027	1071	1100	1177	1211
"100N"	1007	1051	1080	1157	1191

"xN" - width standard for selected non-rebated panel and frame construction door leaves - single-leaf

Cmin	Cmax
75	100
100	125
120	145
140	165
160	185
180	205
200	225
220	245
240	265
260	285
280	305
300	325

Black ST decor, CPL cashmere laminate, light Casella oak and laminates:
standard gloss, metallic gloss, standard matt only available with T80 architrave

ADJUSTABLE DOOR FRAMES

REBATED WITH VARIABLE HEIGHTS WITH ARCHITRAVE T80 OR T63

APPLICATION

The adjustable door frame with variable heights can be used for Standard 10, Modern, Plus rebated door leaves in three additional height options: 1983 mm, 2110 mm and 2240 mm.


SET CONTAINS

Main beam (one horizontal and two vertical elements together with masking elements), door seal, set of hinges, all necessary components for the installation of door frames in accordance with the supplied instruction. Door frames are packed in cardboard boxes. Door frames are packed in cardboard boxes.


All rebated door frames in 3 additional height options should be equipped with 3 hinges.




OR vertical cross-section



OR horizontal cross-section



OR (rebated door frame) cross-section with T80 architrave



H	Hs	hw	H0	hc **	hc *
1983	1969	1991	2006	2061	2044
2110	2096	2118	2133	2188	2171
2240	2226	2248	2263	2318	2301

Hc* - door leaf height with T63 architrave
Hc** - door leaf height with T80 architrave

for single-leaf doors

	A	C	D	E**	E*
60	602	646	680	786	752
70	702	746	780	886	852
80	802	846	880	986	952
90	902	946	980	1086	1052
100	1002	1046	1080	1186	1152

for double-leaf doors

	A	C	D	E**	E*
120	1235	1279	1315	1419	1385
130	1335	1379	1415	1519	1485
140	1435	1479	1515	1619	1585
150	1535	1579	1615	1719	1685
160	1635	1679	1715	1819	1785
170	1735	1779	1815	1919	1885
180	1835	1879	1915	2019	1985
190	1935	1979	2015	2119	2085
200	2035	2079	2115	2219	2185

Extra charge for reinforcement for self closer applies to door frames with 45° connection angle
Price of adjustable door frame for double leaf door: +30%.
Black ST decor, CPL cashmere laminate, light casella oak, available only with T80 architrave.

wall thickness	
Cmin	Cmax
80	105
100	125
120	145
140	165
160	185
180	205
200	225
220	245
240	265
260	285
280	305
300	325

ADJUSTABLE DOOR FRAMES

NON-REBATED WITH VARIABLE HEIGHTS WITH ARCHITRAVE T80 OR T63



APPLICATION


Non-rebated adjustable door frame with variable heights can be used with non-rebated STANDARD 10 , MODERN and PLUS door leaf model which are available in three additional door leaf height options:1983 mm, 2110 mm and 2240 mm.

SET CONTAINS


Main beam (one horizontal and two vertical elements together with masking elements), door seal, set of hinges, all necessary components for the installation of door frames in accordance with the supplied instruction. Door frames are packed in cardboard boxes. Door frames are packed in cardboard boxes.

All door frames in 3 additional height options can be equipped with 2 or 3 hinges.

ORB cross-section 095-300




ORB cross-section 075




E1 - dimension for T63 architrave
E2 - dimension for T80 architrave

ORB vertical cross-section



ORB horizontal cross-section

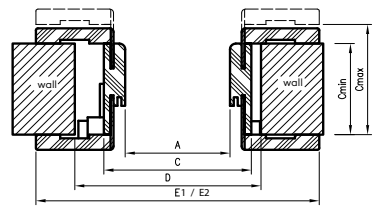

D - required width of wall passage

H	HŚ	hw	H0	hc **	hc *
1983	1982	2004	2019	2074	2057
2110	2109	2131	2146	2201	2184
2240	2239	2261	2276	2331	2314

H0 - required the wall passage height

for single-leaf doors

	A	C	D	E1	E2
"60"	627	671	700	777	811
"70"	727	771	800	877	911
"80"	827	871	900	977	1011
"90"	927	971	1000	1077	1111
"100"	1027	1071	1100	1177	1211

for double-leaf doors

	A	C	D	E2	E1
120	1274	1318	1350	1458	1424
130	1374	1418	1450	1558	1524
140	1474	1518	1550	1658	1624
150	1574	1618	1650	1758	1724
160	1674	1718	1750	1858	1824
170	1774	1818	1850	1958	1924
180	1874	1918	1950	2058	2024

*** NOTE:** 075-100 door frame has a different cross-section for a wall thickness of 75-95 mm

it will be necessary to shorten the tongue of the movable architrave by yourself.

Black ST decor, CPL cashmere laminate, light casella oak and laminates: standard gloss, metallic gloss, standard matt available only with T80 architrave.

Prices for door leaf heights 1983 and 2043 on pages 148-149

Prices include 2 hinges with assembly plates.

- Price of the door frame for double doors: +50% (extra charge when using 3 hinges)
- Extra charge for the third Estetic 80 hinge
- Extra charge for reinforcement for self closer applies to door frames with 45° connection angle
- Extra charge for 90° connection(standard gloss, metallic gloss, standard matt)

wall thickness	
Cmin	Cmax
75	100
100	125
120	145
140	165
160	185
180	205
200	225
220	245
240	265
260	285
280	305
300	325

ADJUSTABLE DOOR FRAMES

FOR DOORS WITH INVERTED REBATE

CONSTRUCTION

The adjustable door frame with the inverted rebate is made of high-quality wood-based board. The exposed side is covered with eco-friendly, wood-like decorative DRE Cell foil, CPL black ST, or painted with the highest quality UV acrylic varnishes. To ensure the high quality of painted door frames, they are coated with a special material before painting, providing a uniform base. Its design is adapted to a door leaf thickness of 40 mm and allows for use in walls ranging from 90 to 295 mm thickness. Connections are made at a 45°.

APPLICATION



The door frame with an inverted rebate is applicable to selected collections: Estra, Nestor, Nova Cell, Uni, Binito, Fargo, Auri, Reva, Premium.

THE SET CONTAINS

Main beam (horizontal and two vertical elements), architrave T80 (horizontal and two vertical elements), door seal, set of two Estetic 1821 hinges, magnetic lock latch, door frame assembling set with the manual. Door frames are packed in cardboard packaging.




vertical cross-section of ORO

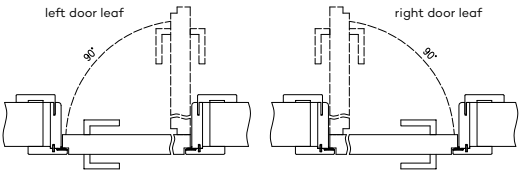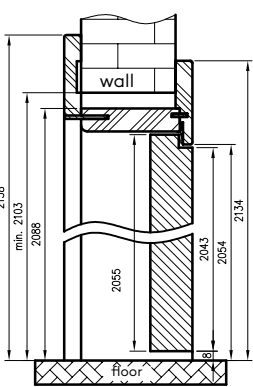


	A	C	D	E	F	S
60	625	694	724	785	834	644
70	725	794	824	885	934	744
80	825	894	924	985	1034	844
90	925	994	1024	1085	1134	944
100	1025	1094	1124	1185	1234	1044

door frame profile



horizontal cross-section of ORO

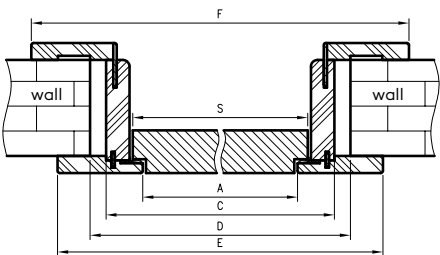

Required height of the wall opening = 2103 mm
D - required width of wall opening

Extra charge for the third Estetic 1821 hinge -

Cmin	Cmax
90	115
110	135
130	155
150	175
170	195
190	215
210	235
230	255
250	275
270	295

DECORS

Painted: white, cashmere, ashen, latte.

DRE Cell: white matt, light grey matt, warm grey matt, cashmere matt, sage oak (structure), dark olive matt, dark blue matt, sage matt, black matt 2, evoke oak, vintage oak, premium nature oak.

CPL laminate: black ST

ADJUSTABLE TUNNEL


WITH ARCHITRAVE T80 or T63

APPLICATION

Adjustable tunnel is a decorative cover of wall passage. It can be used as a separate solution or as an integral part of the sliding wall-mounted system NT.


The adjustable tunnel is a product which is, at first glance visually similar to adjustable door frames, but with a few differences:

- there is no possibility to mount any hinges
- there is no latch strike plate
- no milling for the seal, different height and span of the front and rear architraves (E and F values in the tables)

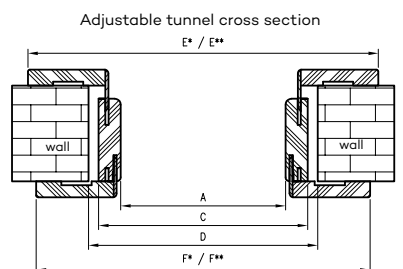


D - required width of wall opening
*refers to Adjustable Tunnel with T63
*refers to Adjustable Tunnel with T80 architrave


TUN cross-section with T80




TUN cross-section with T63



Vertical cross-section of adjustable tunnel with T80 architrave

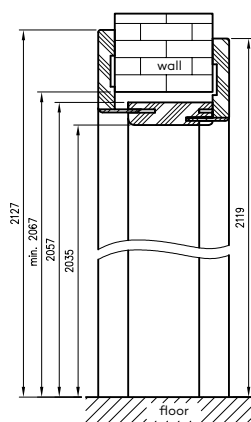

Vertical section of the adjustable tunnel with T63 architrave

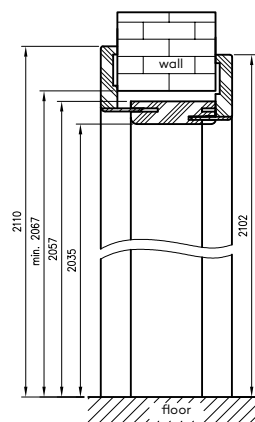

Required height of the wall opening 2067 mm.

SINGLE ADJUSTABLE TUNNEL

symbol	60	70	80	90	100
A	602	702	802	902	1002
C	646	746	846	946	1046
D	664	764	864	964	1064
E*	752	852	952	1052	1152
E**	786	886	986	1086	1186
F*	736	836	936	1036	1136
F**	770	870	970	1070	1170

NOTE: To ensure the highest quality of painted tunnels, before painting process they are coated with special material which constitutes solid base.

DOUBLE ADJUSTABLE TUNNEL

symbol	120	130	140	150	160	170	180	190	200
A	1200	1300	1400	1500	1600	1700	1800	1900	2000
C	1244	1344	1444	1544	1644	1744	1844	1944	2044
D	1264	1364	1464	1564	1664	1764	1864	1964	2064
E*	1350	1450	1550	1650	1750	1850	1950	2050	2150

symbol	120	130	140	150	160	170	180	190	200
E**	1384	1484	1584	1684	1784	1884	1984	2084	2184
F*	1334	1434	1534	1634	1734	1834	1934	2034	2134
F**	1368	1468	1568	1668	1768	1868	1968	2068	2168

OPTIONS AVAILABLE WITH EXTRA CHARGE

Tunnel for double leaf door: +30%

2nd group CPL - CPL laminate natural halifax oak.
Black ST decor, CPL cashmere laminate, light casella oak,
available only with T80 architrave.

wall thickness	
Cmin	Cmax
62	87
87	112
107	132
127	152
147	172
167	192
187	212
207	232
227	252
247	272
267	292
287	312

ADJUSTABLE DOOR FRAMES

NON-REBATED WITH ANGLE PANELS



FARGO 30 - white

DECORS

PAINTED	white	cashmere	latte	ashen
---------	-------	----------	-------	-------

white - UV Premium acrylic varnish - RAL 9003
Cashmere - Premium UV Acrylic Varnish - NCS S2002-Y50R
Latte - Premium UV Acrylic Varnish - Flugger 4362, NCS S1505-Y50R
ashen - Premium UV acrylic varnish - RAL 7035

Wall thickness	
Cmin	Cmax
75	100
100	125
120	145
140	165
160	185
180	205
200	225
220	245
240	265
260	285
280	305
300	325

size of the archi- trave panels	side A	side B
80 mm(x2)	80	80
180 mm(x2)	180	180
900 mm(x2)	900	900
80/180 mm (1/1)	80	180
180/80 mm (1/1)	180	80
80/900 mm (1/1)	80	900
900/80 mm (1/1)	900	80
180/900 mm (1/1)	180	900
900/180 mm (1/1)	900	180

Price of the set

=

price of two vertical
beams

+

price of the hori-
zontal beam with
architrave panels

Prices include 2 hinges with assembly plates.
Extra charge for the third Estetic 80 hinge

ADJUSTABLE DOOR FRAMES

NON-REBATED WITH ANGLE PANELS



CONSTRUCTION

The adjustable, non-rebated door frame is made of high-quality wood-based board. The exposed side is fully covered with a special foil and then painted. Its design is adapted to a door leaf thickness of 40 mm and allows for use in walls ranging from 75 to 325 mm thick. The lintel on both sides of the frame features special angled panels with dimensions to be chosen: 80 mm, 180 mm, or 900 mm.


APPLICATION

Adjustable non-rebated door frame with architrave panels can be used with all DRE non-rebated painted collections.


SET CONTAINS

Main beam with wide architrave (80 mm) with small rounding angles of the cross-section profile (R2), horizontal beam with architrave panels in 3 optional dimensions, door gasket, a set of hinges, all necessary components for the installation of door frames in accordance with the supplied instruction. Door frames are packed in cardboard boxes.

horizontal cross-section of the lintel


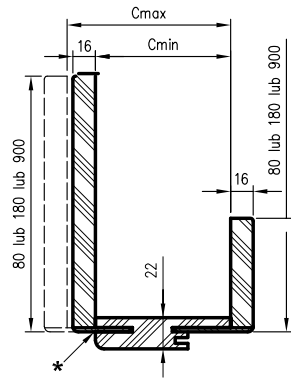


A-A Vertical cross-section

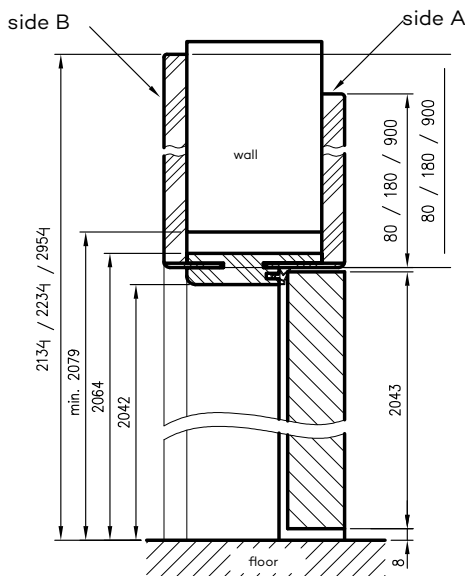


Required height of the wall opening = 2079 mm

cross-section of vertical beam

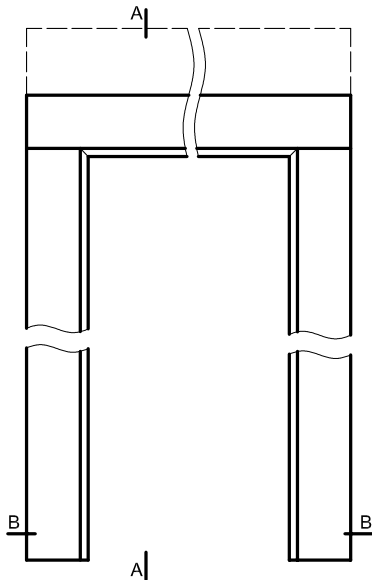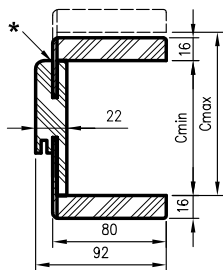

B-B Horizontal cross-section

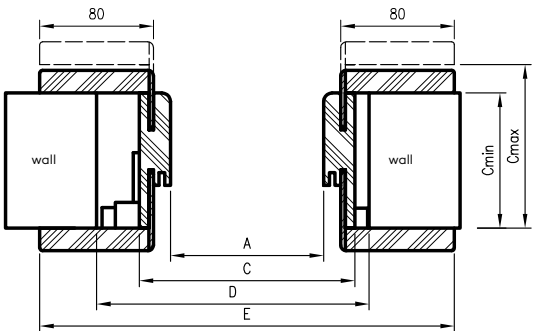

D - required width of wall opening

* Note - 075-100 door frame has a shallower groove for the movable architrave, for a wall thickness of 75-95 mm it will be necessary to shorten the movable architrave yourself.
** - third hinge, option at extra charge

for single-leaf doors

	A	C	D	E
"60"	627	671	700	811
"60N"	607	651	680	791
"70"	727	771	800	911
"70N"	707	751	780	891
"80"	827	871	900	1011
"80N"	807	851	880	991
"90"	927	971	1000	1111
"90N"	907	951	980	1091
"100"	1027	1071	1100	1211
"100N"	1007	1051	1080	1191

"xN" - width standard for selected non-rebated panel and frame construction door leaves - single-leaf

EXTENSION PANELS

APPLICATION



The extension panel is a component of the decorative construction of a passage in a wall or the enlargement of the possibility of installing door frames in walls thicker than 325 mm. The panel extends the central sections of adjustable door frames and adjustable tunnels. It is used with adjustable architraves from previously ordered door frames or tunnels with a 45° connection.

Connection angle of 90° in adjustable door frame (OR) panels comes in color white matt, light grey matt, cashmere matt, warm grey matt, dark olive matt, dark blue matt, sage oak, black matt 2, white acrylic UV varnish, white pine, vintage oak, sand oak, Polish oak 3D

Connection angle of 90° in adjustable non-rebated door frame (ORB) panels , comes in color white matt, light grey matt, cashmere matt, warm grey matt, dark olive matt, dark blue matt, sage oak, black matt 2, white acrylic UV varnish, white pine, sand oak, vintage oak, Polish oak 3D, acrylic laminates (standard gloss, metallic gloss, standard matt, xtreme matt) Extension panels with variable heights are available in Cell and CPL veneer groups and laminates: metallic gloss, standard matt, standard gloss, xtreme matt.

SET CONTAINS

- two vertical beams
- horizontal beam
- three connecting tongues
- accessories used to connect main beams

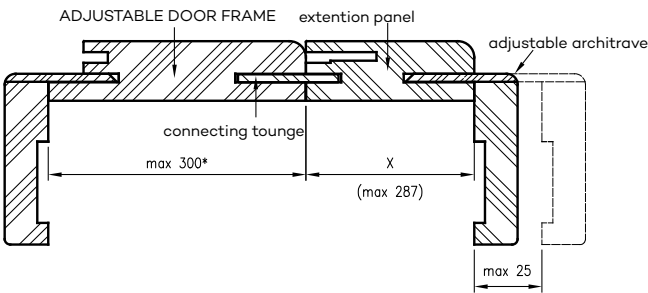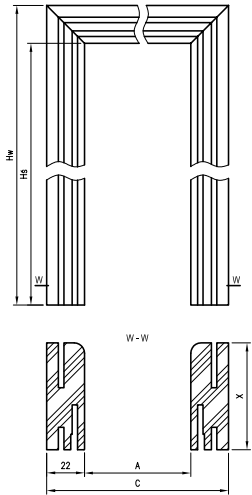

* in ORS max 280
in adjustable inverted reate door frame (ORO) max 270
in a tunnel (TUN) max 287

options of the width of panels cross-section

X	062	087	107	127	147	167	187	207	227	247	267	287
---	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

EXTENSION PANELS

Dimensions of extension panels OR - adjustable door frames for rebated doors

	height options					for single-leaf doors						for double-leaf doors											
	PL	198x	211x	224X		"60"	"70"	"80"	"90"	"100"	"110"	"100d"	"110d"	"120"	"130"	"140"	"150"	"160"	"170"	"180"	"190"	"200"	
HŠ	2029	1969	2096	2226	A	602	702	802	902	1002	1102	1035	1135	1235	1335	1435	1535	1635	1735	1835	1935	2035	
hw	2051	1991	2118	2248	C	646	746	846	946	1046	1146	1079	1179	1279	1379	1479	1579	1679	1779	1879	1979	2079	

Dimensions of the ORB extension panels connected at 45° - non-rebated adjustable door frames for non-rebated doors connected at 45°

height options					for single-leaf doors										for double-leaf doors							
	PL	198x	211x	224X		"60"	"60N"	"70"	"70N"	"80"	"80N"	"90"	"90N"	"100"	"100N"	„120"	„130"	„140"	„150"	„160"	„170"	„180"
HŠ	2042	1982	2109	2239	A	627	607	727	707	827	807	927	907	1027	1007	1274	1374	1474	1574	1674	1774	1874
hw	2064	2004	2131	2261	C	671	651	771	751	871	851	971	951	1071	1051	1318	1418	1518	1618	1718	1818	1918

Dimensions of TUN extension panels - adjustable tunnels

"xN" - width standard for selected non-rebated panel and frame construction door leaves - single-leaf

		for single-leaf doors					for double-leaf doors									
	PL	"60"	"70"	"80"	"90"	"100"	„120"	„130"	„140"	„150"	„160"	„170"	„180"	„190"	„200"	
HŠ	2035	A	602	702	802	902	1002	1200	1300	1400	1500	1600	1700	1800	1900	2000
hw	2057	C	646	746	846	946	1046	1244	1344	1444	1544	1644	1744	1844	1944	2044

Dimensions of the ORC extension panels - adjustable door frames for glass doors

	PL		"60"	"70"	"80"	"90"
HŠ	2035	A	600	700	800	900
hw	2057	C	644	744	844	944

Dimensions of the ORS extension panels - adjustable door frames for folding doors

	PL		"80"	"90"	"100"
HŠ	2029	A	806	906	1006
hw	2051	C	850	950	1050

Dimensions of ORO extension panels - adjustable door frames for door leaves with inverted rebate

	PL		"60"	"70"	"80"	"90"	"100"
HŠ	2066	A	650	750	850	950	1050
hw	2088	C	694	794	894	994	1094

Width of the panel X
62
87
107
127
147
167
187
207
227
247
267
287

OPTIONS AVAILABLE WITH EXTRA CHARGE

- Double door panel: +30%
- Extra charge for 90° connection

STEEL FIXED DOOR FRAMES

DOOR FRAME CONSTRUCTION

Steel door frames are made of 1.5 mm thick low-carbon steel sheet, protected with a varnished, organic protective coating. The door frame consists of two stands: a catch and a hinge (in the door frame for double-leaf doors, both hinge stands) and a lintel, permanently connected to each other by welding. The hinge stands are equipped with hinge sockets, while the catch stands have cutouts for the tongue and bolts of the lock dedicated to the door leaf (the set includes a closing gasket). The profile of the door frame, its dimensions, equipment and colors depend on the selected variant - the type of door for which the door frame is to be used.

APPLICATION / TYPES OF OSS DOOR FRAMES (FIXED STEEL DOOR FRAMES)

OSS_STAND	OSS For rebated interior doors
OSSB_STAND	OSS for non-rebated interior doors
OSS_GLASS	OSS for interior glass doors
OSS_ENTER	OSS for the Enter door, Enter Akustik, Revos
OSS_SOLID	OSS for solid doors
OSS_SOLID_RC2	OSS for Solid RC2 door leaf
OSS_ATHOS	OSS for Athos door leaf
OSS_OLIMP_EI30	OSS for Olimp EI-30 door leaf

All frames are designed to be mounted on the finished floor.



STANDARD OPTIONS IN OSS

- sockets for 2, 3, 4 or 6 hinges
- socket for latch plate of main lock

STANDARD OPTIONS IN OSSB

- sockets for 2, 4 or 6 hinges
- magnetic lock latch

STANDARD OPTIONS IN OSS GLASS

- sockets for 2 hinges
- socket for latch plate of main lock

STANDARD OPTIONS IN OSS ENTER

- sockets for 3 hinges
- socket for main lock or additionally for upper lock

STANDARD OPTIONS IN OSS SOLID

- sockets for 3 hinges
- additional sockets for anti-thrust bolts
- sockets for latch bolts of multi-point lock used in SOLID model

STANDARD OPTIONS IN OSS SOLID RC2

- sockets for 3 triple hinges
- additional sockets for anti-thrust bolts
- sockets for latch bolts of multi-point lock used in SOLID model

STEEL FIXED DOOR FRAME OSS ATHOS AS A STANDARD





- sockets for 3 triple hinges
- additional sockets for anti-thrust bolts
- socket for latch plate of main lock

STANDARD OPTIONS FOR OSS OLIMP EI30

- sockets for 3 three-part hinges
- socket for latch plate of main lock

AVAILABLE COLOURS


The door frames are powder-coated in two gloss levels: matt/fine texture or semi-gloss/smooth. The cashmere color is only available in a deep matt finish.

 white matt RAL 9003	 light gray matt RAL 7047	 brown matt RAL 8017	 white semigloss RAL 9003	 light gray semi-gloss RAL 7047	 semigloss brown RAL 8017	 semi-gloss beige *** RAL 1001	 black matt RAL 9005	 Black semi-gloss RAL 9005
 cashmere deep matt NEW	 anthracite matt NEW	 dark gray matt*	 dark gray semi-gloss*					
	RAL 7016	RAL 7024	RAL 7024					

*** beige colour is available only in semi-gloss


*color available while stock last

STEEL FIXED DOOR FRAMES

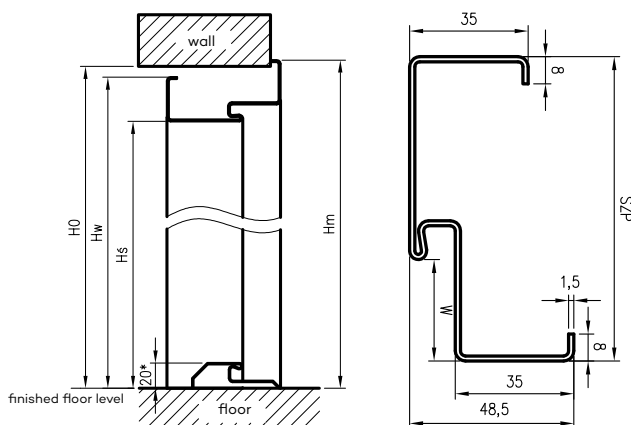

type of the door frame	H0	Hs	hw	hm	W	SZP
OSSB STAND	2084	2040,5	2075,5	2089	48	106
OSS STAND	2071	2027,5*	2062,5	2076	30	90
OSS ENTER						
OSS SOLID						
OSS SOLID RC2						
OSS for glass doors	2077	2033,5	2068,5	2082	30	90
OSS ATHOS	2073	2029,5*	2064,5	2078	38	117
OSS OLIMP EI30	2070	2025,5	2060,5	2074		

H0 - height of the wall opening
Hs - height of the door frame passage
* - with the use of a steel threshold - the actual height of the door frame passage will be reduced by 20mm from the floor

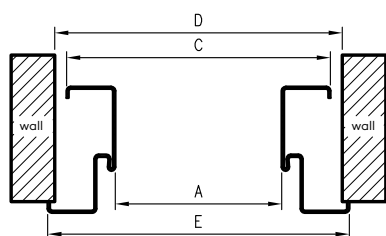

D - width of the assembly hole

OSS width dimensions

symbol width.	A	C	D	E	OSS STAND	OSS glass doors	OSS ENTER	OSS SOLID	OSS SOLID RC2	OSS ATHOS
"60"	600	670	687	697	•	•				
"70"	700	770	787	797	•	•	•			
"80"	800	870	887	897	•	•	•	•	•	•
"90"	900	970	987	997	•	•	•	•	•	•
"90E"	904	974	991	1001	•		•	•	•	
"90E"	915	985	1002	1012						•
"100"	1000	1070	1087	1097	•		•	•	•	•
"110"	1100	1170	1187	1197	•	•	•	•	•	•

**** - investment dimension "90E" different for technical and other doors

OSS OLIMP EI30
for single leaf door

symbol width.	A	C	D	E
"80"	802	872	889	899
"90"	902	972	989	999
"90E"	917	987	1004	1014
"100"	1002	1072	1089	1099
"110"	1102	1172	1189	1199

"xN" - width standard for selected non-rebated panel and frame construction door leaves - single-leaf

OSSB STAND
for single leaf door

symbol width.	A	C	D	E
"60"	624	694	711	721
"60N"	604	674	691	701
"70"	724	794	811	821
"70N"	704	774	791	801
"80"	824	894	911	921
"80N"	804	874	891	901
"90"	924	994	1011	1021
"90N"	904	974	991	1001
"100"	1024	1094	1111	1121
"100N"	1004	1074	1091	1101

OSS STAND dimensions
for double leaf doors

symbol width.	A	C	D	E
"100D"	1034	1104	1121	1131
"110D"	1134	1204	1221	1231
"120"	1234	1304	1321	1331
"130"	1334	1404	1421	1431
"140"	1434	1504	1521	1531
"150"	1534	1604	1621	1631
"160"	1634	1704	1721	1731
"170"	1734	1804	1821	1831
"180"	1834	1904	1921	1931
"190"	1934	2004	2021	2031
"200"	2034	2104	2121	2131

OSSB STAND
for double leaf doors

symbol width.	A	C	D	E
"120"	1271	1341	1358	1368
"130"	1371	1441	1458	1468
"140"	1471	1541	1558	1568
"150"	1571	1641	1658	1668
"160"	1671	1741	1758	1768
"170"	1771	1841	1858	1868
"180"	1871	1941	1958	1968

Prices of OSS OLIMP EI30

width	net price	gross price
"80" - "90", "90E"		
"100", "110"		

* - STAND steel fixed door frames for double leaf door "100d" - "200" width
*** - OSSB STAND (fixed steel non-rebated door frame) single-leaf door frames with 3 hinges, extra charge ,
for double-leaf doors with 6 hinges extra charge

STEEL ADJUSTABLE DOOR FRAMES

REBATED

The essence of the adjustable door frame is that its construction allows to instal door frame, without additional finishing work. Angular architrave allows for additional adjustment in the range + 30mm.

APPLICATION / TYPES OF OSR DOOR FRAMES (STEEL ADJUSTABLE DOOR FRAMES)

OSR_STAND	OSR For rebated interior doors
OSRB_STAND	OSR for non-rebated interior doors
OSR_GLASS	OSR For interior glass doors
OSR_ENTER	OSR for the door leaf Enter, Enter Akustik, Revos
OSR_SOLID	OSS for solid doors
OSR_SOLID_RC2	OSR for Solid RC2
OSR_ATHOS	OSR for Athos door leaf
OSR_OLIMP EI 30	OSS for Olimp EI-30 door leaf
OSR_OLIMP EI 60	OSR for Olimp EI 60 doors

All frames are designed to be mounted on the finished floor.
The door frames are suitable for walls with a thickness of 95-305 mm, 103-313 mm in the case of steel adjustable door frame OSR ATHOS and steel adjustable door frame OSR OLIMP EI30 or 113-323 mm in the case of steel adjustable door frame OSR OLIMP EI 60.
For a given wall thickness, select the appropriate door frame variant, the Cmin - Cmax range of which will include the thickness of the finished wall.



CONSTRUCTION

Steel door frames are made of 1.5 mm thick low-carbon steel sheet, powder coated. The door frame consists of two stands: a catch and a hinge (in the door frame for double-leaf doors, both hinge stands) and a lintel, permanently connected to each other by welding. The hinge stands are equipped with hinge sockets, while the catch stands have cutouts for the tongue and bolts of the lock dedicated to the door leaf (the set includes a closing gasket). The outer and inner side of the door frame is protected with a varnished, organic protective coating. The profile of the door frame, its dimensions and equipment depend on the selected variant - the type of door to which the door frame is to be applied

STANDARD OPTIONS IN OSR STAND

- sockets for 2, 3, 4 or 6 hinges
- socket for latch plate of main lock

STANDARD OPTIONS IN OSRB STAND

- sockets for 2, 4 or 6 hinges
- magnetic lock latch

STANDARD OPTIONS IN OSR GLASS DOORS

- sockets for 2 hinges
- socket for latch plate of main lock

STANDARD OPTIONS IN OSR ENTER

- sockets for 3 hinges
- socket for main lock or additionally for upper lock

STANDARD OPTIONS IN OSR SOLID

- sockets for 3 hinges
- additional sockets for anti-thrust bolts
- sockets for latch bolts of multi-point lock used in SOLID model

STANDARD OPTIONS IN OSR SOLID RC2

- sockets for 3 triple hinges
- additional sockets for anti-thrust bolts
- sockets for latch bolts of multi-point lock used in SOLID model

OSS ATHOS AS A STANDARD

- sockets for 3 triple hinges
- additional sockets for anti-thrust bolts
- socket for latch plate of main lock

STANDARD OPTIONS FOR OSR OLIMP EI30






- sockets for 3 threefold hinges
- socket for latch plate of main lock

AS STANDARD OSR OLIMP EI 60

- sockets for 3 pcs. of three-part or object hinges
- socket for latch plate of main lock

AVAILABLE COLOURS

The door frames are powder-coated in two gloss levels: matt/fine texture or semi-gloss/smooth. The cashmere color is only available in a deep matt finish.

 white matt RAL 9003	 light gray matt RAL 7047	 brown matt RAL 8017	 white semigloss RAL 9003	 light gray semi-gloss RAL 7047	 semigloss brown RAL 8017	 semi-gloss beige *** RAL 1001	 black matt RAL 9005	 Black semi-gloss RAL 9005
 cashmere deep matt NEW	 anthracite matt NEW	 dark gray matt*	 dark gray semi-gloss*					
	RAL 7016	RAL 7024	RAL 7024					


*color available while stock last

*** beige colour is available only in semi-gloss


STEEL ADJUSTABLE DOOR FRAMES

REBATED


ADJUSTABLE STEEL REBATED DOOR FRAMES - DIMENSIONS

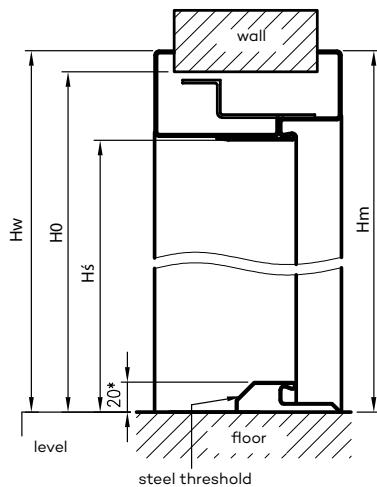

OSR door frame profile with the T57 architrave

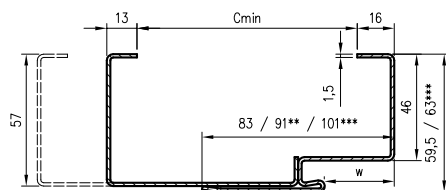

** 91 for steel adjustable door frame OSR ATHOS, OSR OLIMP EI 30
*** applies to steel adjustable door frame OSR Olimp EI 60

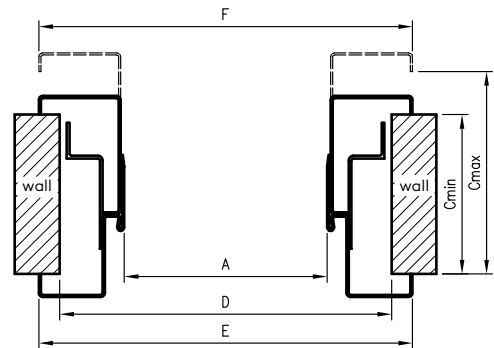

* - with the use of a steel threshold - the actual height of the door frame passage will be reduced by 20mm from the floor
D - width of the wall opening

OSR OLIMP EI30 for single leaf door

symbol width.	A	D	E	F
"80"	802	892	921	921
"90"	902	992	1021	1021
"90E"	917	1007	1036	1036
"100"	1002	1092	1121	1121
"110"	1102	1192	1221	1221

steel adjustable door frame OSR OLIMP EI60 for single leaf door

symbol width.	A	D	E	F
"80"	797	894	923	916
"90"	897	994	1023	1016
"90E"	926	1023	1052	1045
"100"	997	1094	1123	1116
"110"	1097	1194	1223	1216

OSR STAND dimensions for double leaf doors

sym-bol width.	A	D	E	F
"100D"	1034	1124	1153	1153
"110D"	1134	1224	1253	1253
"120"	1234	1324	1353	1353
"130"	1334	1424	1453	1453
"140"	1434	1524	1553	1553
"150"	1534	1624	1653	1653
"160"	1634	1724	1753	1753
"170"	1734	1824	1853	1853
"180"	1834	1924	1953	1953
"190"	1934	2024	2053	2053
"200"	2034	2124	2153	2153

type of the door frame	H0	Hs	hw	hm	W
OSR_STAND					
OSR_ENTER	2073	2027,5*	2088	2087	30
OSR_SOLID					
OSR_SOLID_RC2					
OSR_GLASS DOORS	2079	2033,5	2094	2093	30
OSR_ATHOS	2073	2027,5*	2088	2087	38
OSR OLIMP EI30	2073	2027,5	2088	2087	
OSR OLIMP EI60	2072	2023	2083,5	2086	48

H0 - height of the wall opening
Hs - height of the door frame passage
* - with the use of a steel threshold - the actual height of the door frame passage will be reduced by 20mm from the floor

OSR width dimensions

symbol width.	A	D	E	OSR_STAND	OSR_glass doors	OSR_ENTER	OSR_SOLID	OSR_SOLID_RC2	OSR_ATHOS
"60"	600	690	719	•	•				
"70"	700	790	819	•	•	•			
"80"	800	890	919	•	•	•	•	•	•
"90"	900	990	1019	•	•	•	•	•	•
"90E"	904	994	1023	•	•	•	•	•	•
"90E"	915	1005	1034						•
"100"	1000	1090	1119	•	•	•	•	•	•
"110"	1100	1190	1219	•	•	•	•	•	•

**** - investment dimension "90E" different for technical and other doors

STEEL ADJUSTABLE DOOR FRAMES

REBATED



PRICES OF STEEL ADJUSTABLE REBATED DOOR FRAMES

OSR ENTER, OSR SOLID, OSR STAND ***, OSR GLASS DOORS, OSR_SO- LID_RC2	
wall thickness	
Cmin	Cmax
95	125
125	155
155	185
185	215
215	245
245	275
275	305

*** OSR ENTER "70" - "110"; OSR SOLID "80" - "100" OSR GLASS "60" - "90"

OSR ATHOS, OSR OLIMP EI 30	
wall thickness	
Cmin	C max
103	133
133	163
163	193
193	223
223	253
253	283
283	313


OSR_OLIMP EI 60 "80" - "90E" OSR_OLIMP EI 60 „100" - „110"	
wall thickness	
Cmin	Cmax
113	143
143	173
173	203
203	233
233	263
263	293
293	323

STEEL ADJUSTABLE DOOR FRAMES

NON-REBATED


STEEL ADJUSTABLE NON-REBATED DOOR FRAMES - DIMENSIONS

OSRB horizontal cross-section

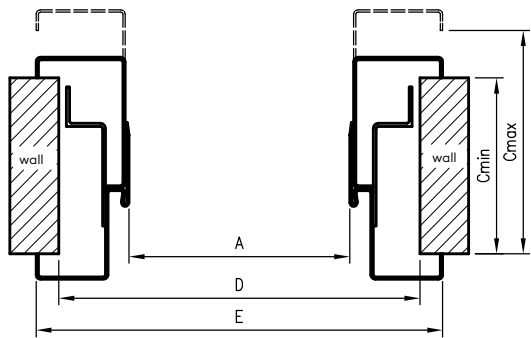


D - width of the assembly hole

Vertical section of the OSRB

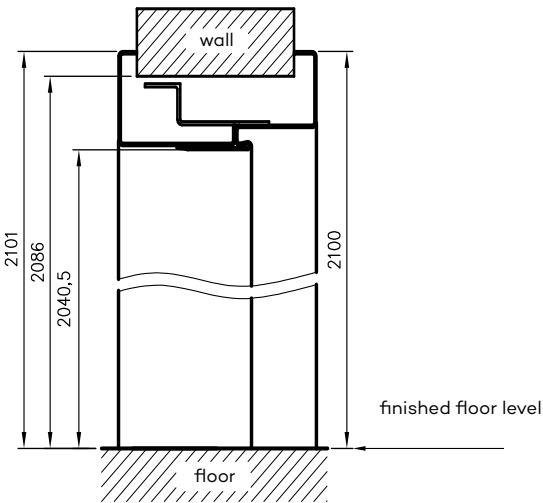

OSRB door frame profile

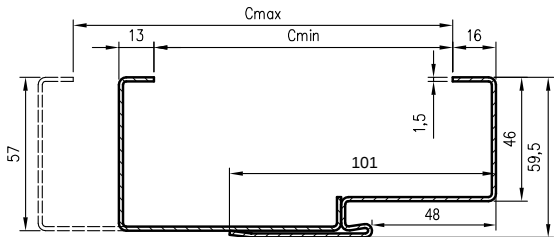

Dimensions for double leaf doors

symbol width.	A	D	E
„120“	1271	1361	1390
„130“	1371	1461	1490
„140“	1471	1561	1590
„150“	1571	1661	1690
„160“	1671	1761	1790
„170“	1771	1861	1890
„180“	1871	1961	1990

Dimensions for single leaf doors

symbol width.	A	D	E
„60“	624	714	743
„60N“	604	694	723
„70“	724	814	843
„70N“	704	794	823
„80“	824	914	943
„80N“	804	894	923
„90“	924	1014	1043
„90N“	904	994	1023
„100“	1024	1114	1143
„100N“	1004	1094	1123

„xN“ - width standard for selected non-rebated panel and frame construction door leaves - single-leaf

NOTE: Extra charge for reinforcement for door closer

wall thickness	
Cmin	Cmax
95	125
111	141
141	171
171	201
201	231
231	261
261	291
291	321

*** - OSRB STAND (steel adjustable non-rebated door frame for STANDARD door leaf model) single leaf door frames with 3 hinges, extra charge , for double leaf with 6 pcs. of hinges extra charge

STEEL HYBRID DOOR FRAMES

REBATED

CONSTRUCTION:

Steel hybrid door frames combine the durability of a metal structure with the added functionality of fully enclosing the door frame using wood-based door frame elements finished with CPL laminate. The hybrid door frame combines a fixed-width metal door frame, a wood-based panel available in 11 widths, and a masking architrave. This solution allows for door frame thicknesses of 137-337 mm (145-345 mm for technical doors and 155-355 mm for Olimp EI60 doors) and allows for adjustment using the masking architrave up to 25 mm.

Door frame profile dimensions and equipment depend on selected option - door leaf model.

APPLICATION / TYPES OF OSH DOOR FRAMES (STEEL HYBRID DOOR FRAMES)

OSH_STAND	OSH for rebated interior door leaf	
OSHB_STAND	OSH for non-rebated interior doors	
OSH_GLASS	OSH For interior glass doors	
OSH_ENTER	OSH for the door Enter, Enter Akustik, Revos	
OSH_SOLID	OSH for Solid doors	
OSH_SOLID_RC2	OSH for Solid RC2	
OSH_ATHOS	OSH for the Athos door leaf	
steel hybrid door frame OSH_OLIMP EI 30	OSH for Olimp EI-30 door leaf	
steel hybrid door frame OSH_OLIMP EI 60	steel hybrid door frame OSH for	
Olimp EI 60 doors		



All frames are designed to be mounted on the finished floor.

STANDARD OPTIONS IN OSH STAND

- sockets for 2 or 3 hinges
- socket for latch plate of main lock
- In the door frame for double-leaf doors - sockets for 4 or 6 hinges

STANDARD OPTIONS IN OSHB STAND

- sockets for 2 or 4 hinges
- magnetic lock latch

STANDARD OPTIONS IN OSH GLASS

- sockets for 2 hinges
- socket for latch plate of main lock

STANDARD OPTIONS IN OSH ENTER

- sockets for 3 hinges
- socket for main lock or additionally for upper lock

STANDARD OPTIONS IN OSH SOLID

- sockets for 3 hinges
- additional sockets for anti-thrust bolts
- sockets for latch bolts of multi-point lock used in SOLID model

STANDARD OPTIONS IN OSH SOLID RC2

- sockets for 3 triple hinges
- additional sockets for anti-thrust bolts
- sockets for latch bolts of multi-point lock used in SOLID model

STEEL HYBRID DOOR FRAME OSS ATHOS AS A STANDARD

- sockets for 3 triple hinges
- additional sockets for anti-thrust bolts
- socket for latch plate of main lock

STANDARD OPTIONS FOR OSH OLIMP EI30

- socket for latch plate of main lock
- sockets for 3 triple hinges

AS A STANDARD OSH OLIMP EI60

- socket for latch plate of main lock
- sockets for 3 pcs. of three-part or object hinges

AVAILABLE COLOURS

The door frames are powder-coated in two gloss levels: matt/fine texture or semi-gloss/smooth. The cashmere color is only available in a deep matt finish.

white matt	light gray matt	brown matt	white semigloss	light gray semi-gloss	semigloss brown	semi-gloss beige ***	black matt	Black semi-gloss
RAL 9003	RAL 7047	RAL 8017	RAL 9003	RAL 7047	RAL 8017	RAL 1001	RAL 9005	RAL 9005

*** beige colour is available only in semi-gloss

CPL LAMINATES

white	milky white	ashen	anthracite	concrete 2	gray oak	welsh oak	light Casella oak	dark gray*
acacia	celini walnut	walnut	honey oak	natural hickory	roasted walnut	black ST	NEW cashmere	

cashmere deep matt	anthracite matt
	RAL 7016
dark gray matt*	dark gray semi-gloss*


RAL 7024 RAL 7024

*color available while stock last

STEEL HYBRID DOOR FRAMES

REBATED

STEEL HYBRID REBATED DOOR FRAMES - DIMENSIONS

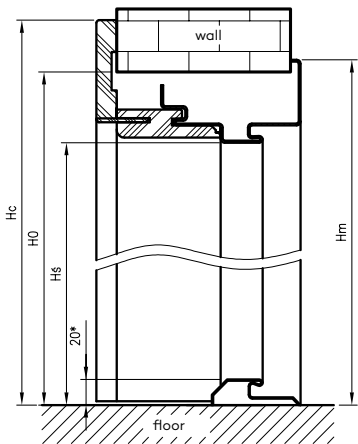

OSH STAND dimensions for double leaf doors


symbol width.	A	D	E	F
„100d“	1034	1144	1164	1226
„110d“	1134	1244	1264	1326
„120“	1234	1344	1364	1426
„130“	1334	1444	1464	1526
„140“	1434	1544	1564	1626
„150“	1534	1644	1664	1726
„160“	1634	1744	1764	1826
„170“	1734	1844	1864	1926
„180“	1834	1944	1964	2026
„190“	1934	2044	2064	2126
„200“	2034	2144	2164	2226

OSH (Steel Hybrid door frames) width dimensions

symbol width.	A	D	E	F	OSH_STAND	OSH glass doors	OSH ENTER	OSH_SOLID	OSH SOLID RC2	OSH_ATHOS
„60“	600	710	730	792	•	•				
„70“	700	810	830	892	•	•	•			
„80“	800	910	930	992	•	•	•	•	•	•
„90“	900	1010	1030	1092	•	•	•	•	•	•
„90E“	904	1014	1034	1096	•		•	•	•	
„90E“	915	1025	1045	1107						•
„100“	1000	1110	1130	1192	•		•	•	•	•
„110“	1100	1210	1230	1292	•	•				•

**** - investment dimension "90E" different for technical and other doors


D - width of the assembly hole
Select the appropriate option of the adjustable panel with masking architrave (Cmin) for a specific wall thickness

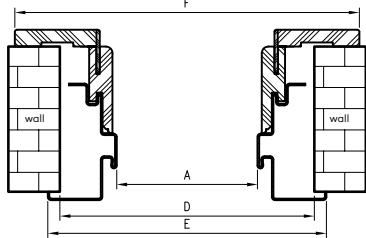

OSH OLIMP EI30 dimensions for single leaf door

symbol width.	A	D	E	F
„80“	802	912	932	994
„90“	902	1012	1032	1094
„90E“	917	1027	1047	1109
„100“	1002	1112	1132	1194
„110“	1102	1212	1232	1294

door frame profile

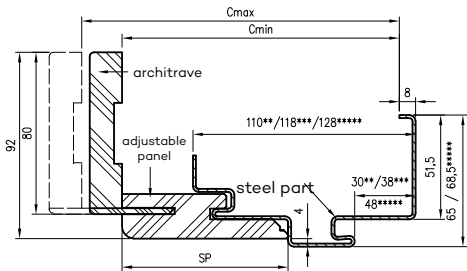

** - dimensions for remaining OSH frames

*** - dimensions for steel hybrid door frame OSH ATHOS, OSH OLIMP EI 30

**** - dimensions for steel hybrid door frame OSH OLIMP EI 60

type of the door frame.	H0	Hs	hm	HC
OSH_STAND	2083	2027,5*	2092,5	2124
OSH ENTER				
OSH_SOLID				
OSH SOLID RC2				
OSH for glass doors	2089	2033,5	2098,5	2130
OSH_ATHOS	2085	2029,5*	2094,5	2126
OSH OLIMP EI30	2081	2025,5	2090	2122
OSH OLIMP EI60	2082	2023	2091,5	2119

H0 - height of the wall opening
Hs - height of the door frame passage
* - when using a steel threshold - actual the height of the clear passage will decrease by 20mm from the given one

Dimensions steel hybrid door frame OSH OLIMP EI60 for single leaf door

symbol width.	A	D	E	F
„80“	797	907	934	989
„90“	897	1007	1034	1089
„90E“	926	1036	1063	1118
„100“	997	1107	1134	1189
„110“	1097	1207	1234	1289

Prices for the adjustable panel with masking architrave


wall thickness range						SP
OSH_ATHOS OSH for Olimp EI-30 door leaf		OSH STAND OSH GLASS OSH ENTER OSH SOLID OSH SOLID RC2		OSH OLIMP EI60		
option Cmin	Cmax	option Cmin	Cmax	option Cmin	Cmax	
145	170	137	162	155	180	82
165	190	157	182	175	200	102
185	210	177	202	195	220	122
205	230	197	222	215	240	142
225	250	217	242	235	260	162
245	270	237	262	255	280	182
265	290	257	282	275	300	202
285	310	277	302	295	320	222
305	330	297	322	315	340	242
325	350	317	342	335	360	262
345	370	337	362	355	380	282

Price for double doors: +30% 2nd group of CPL - CPL laminate, natural halifax oak.

STEEL HYBRID NON-REBATED



NON-REBATED

STEEL HYBRID NON-REBATED DOOR FRAMES - DIMENSIONS

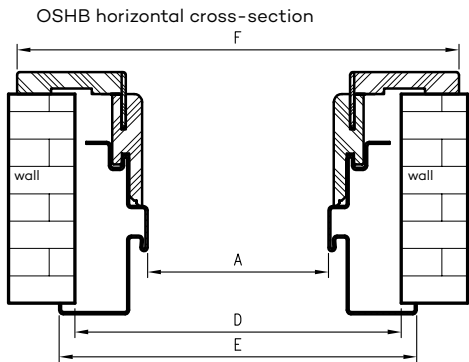

D - width of the assembly hole

OSH door frame profile

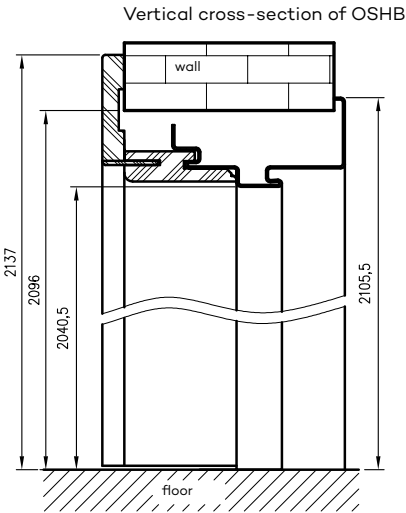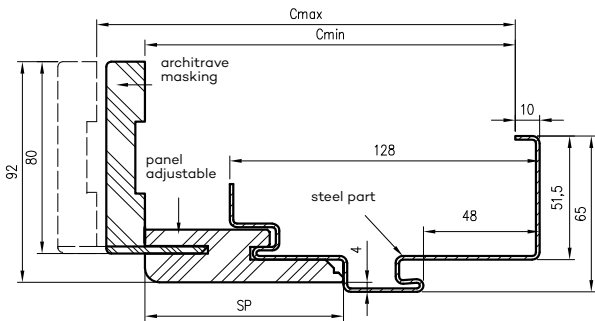

Select the appropriate option of the adjustable panel with masking architrave (Cmin) for a specific wall thickness

Dimensions for single leaf doors

symbol width.	A	D	E	F
"60"	624	734	754	816
"60N"	604	714	734	796
"70"	724	834	854	916
"70N"	704	814	834	896
"80"	824	934	954	1016
"80N"	804	914	934	996
"90"	924	1034	1054	1116
"90N"	904	1014	1034	1096
"100"	1024	1134	1154	1216
"100N"	1004	1114	1134	1196

"xN" - width standard for selected non-rebated panel and frame construction door leaves - single-leaf

Dimensions for double leaf doors

symbol width.	A	D	E	F
„120"	1271	1381	1401	1463
„130"	1371	1481	1501	1563
„140"	1471	1581	1601	1663
„150"	1571	1681	1701	1763
„160"	1671	1781	1801	1863
„170"	1771	1881	1901	1963
„180"	1871	1981	2001	2063

OSH STAND		SP
variant= Cmin	Cmax	
153	178	82
173	198	102
193	218	122
213	238	142
233	258	162
253	278	182
273	298	202
293	318	222
313	338	242
333	358	262
353	378	282

Price for double-leaf doors: + 30%
2nd group CPL - CPL laminate natural halifax oak.

SMALL ANGULAR REBATED DOOR FRAMES

DOOR FRAMES

CONSTRUCTION:




The steel door frames are made of 1.2 mm thick low-carbon steel sheet, protected with a varnish, organic protective coating. The door frame consists of two stands: latch strike plate and hinge, and a lintel, permanently connected by welding. Hinged racks are equipped with hinge sockets (2-3 pcs.), while hook racks have cutouts for the tongue and latches of the dedicated door leaf lock (the set includes a covering gasket).

APPLICATION

Small Angular Steel Door Frame - door frame designed for rebated interior doors



OSMK door frame profile

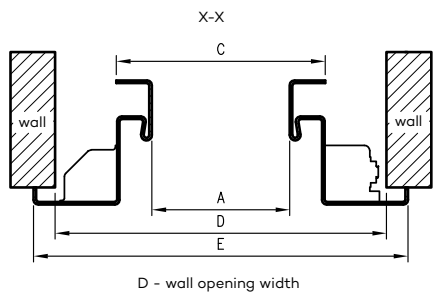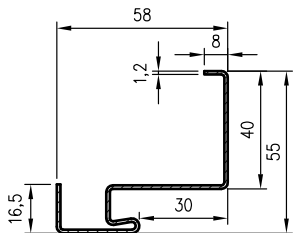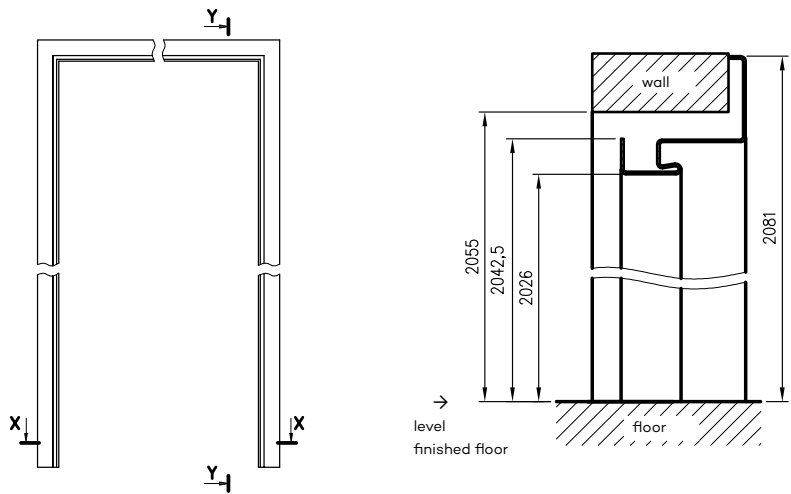

Dimensions for single leaf doors

symbol width.	A	C	D	E
"60"	600	633	690	710
"70"	700	733	790	810
"80"	800	833	890	910
"90"	900	933	990	1010
"90E"	904	937	994	1014
"100"	1000	1033	1090	1110

AVAILABLE COLOURS

The door frames are powder-coated in two gloss levels: matt/fine texture or semi-gloss/smooth. The cashmere color is only available in a deep matt finish.




*color available while stock last

*** beige colour is available only in semi-gloss

ACCESSORIES, DOOR HANDLES, ADDITIONAL INFORMATION

Door handles and accessories are details that give doors a unique character, emphasize their style, and help them coherently fit into the overall interior design. Carefully selected finishing elements also enhance the comfort, functionality, and aesthetics of the door, creating a harmonious whole with other furnishings.

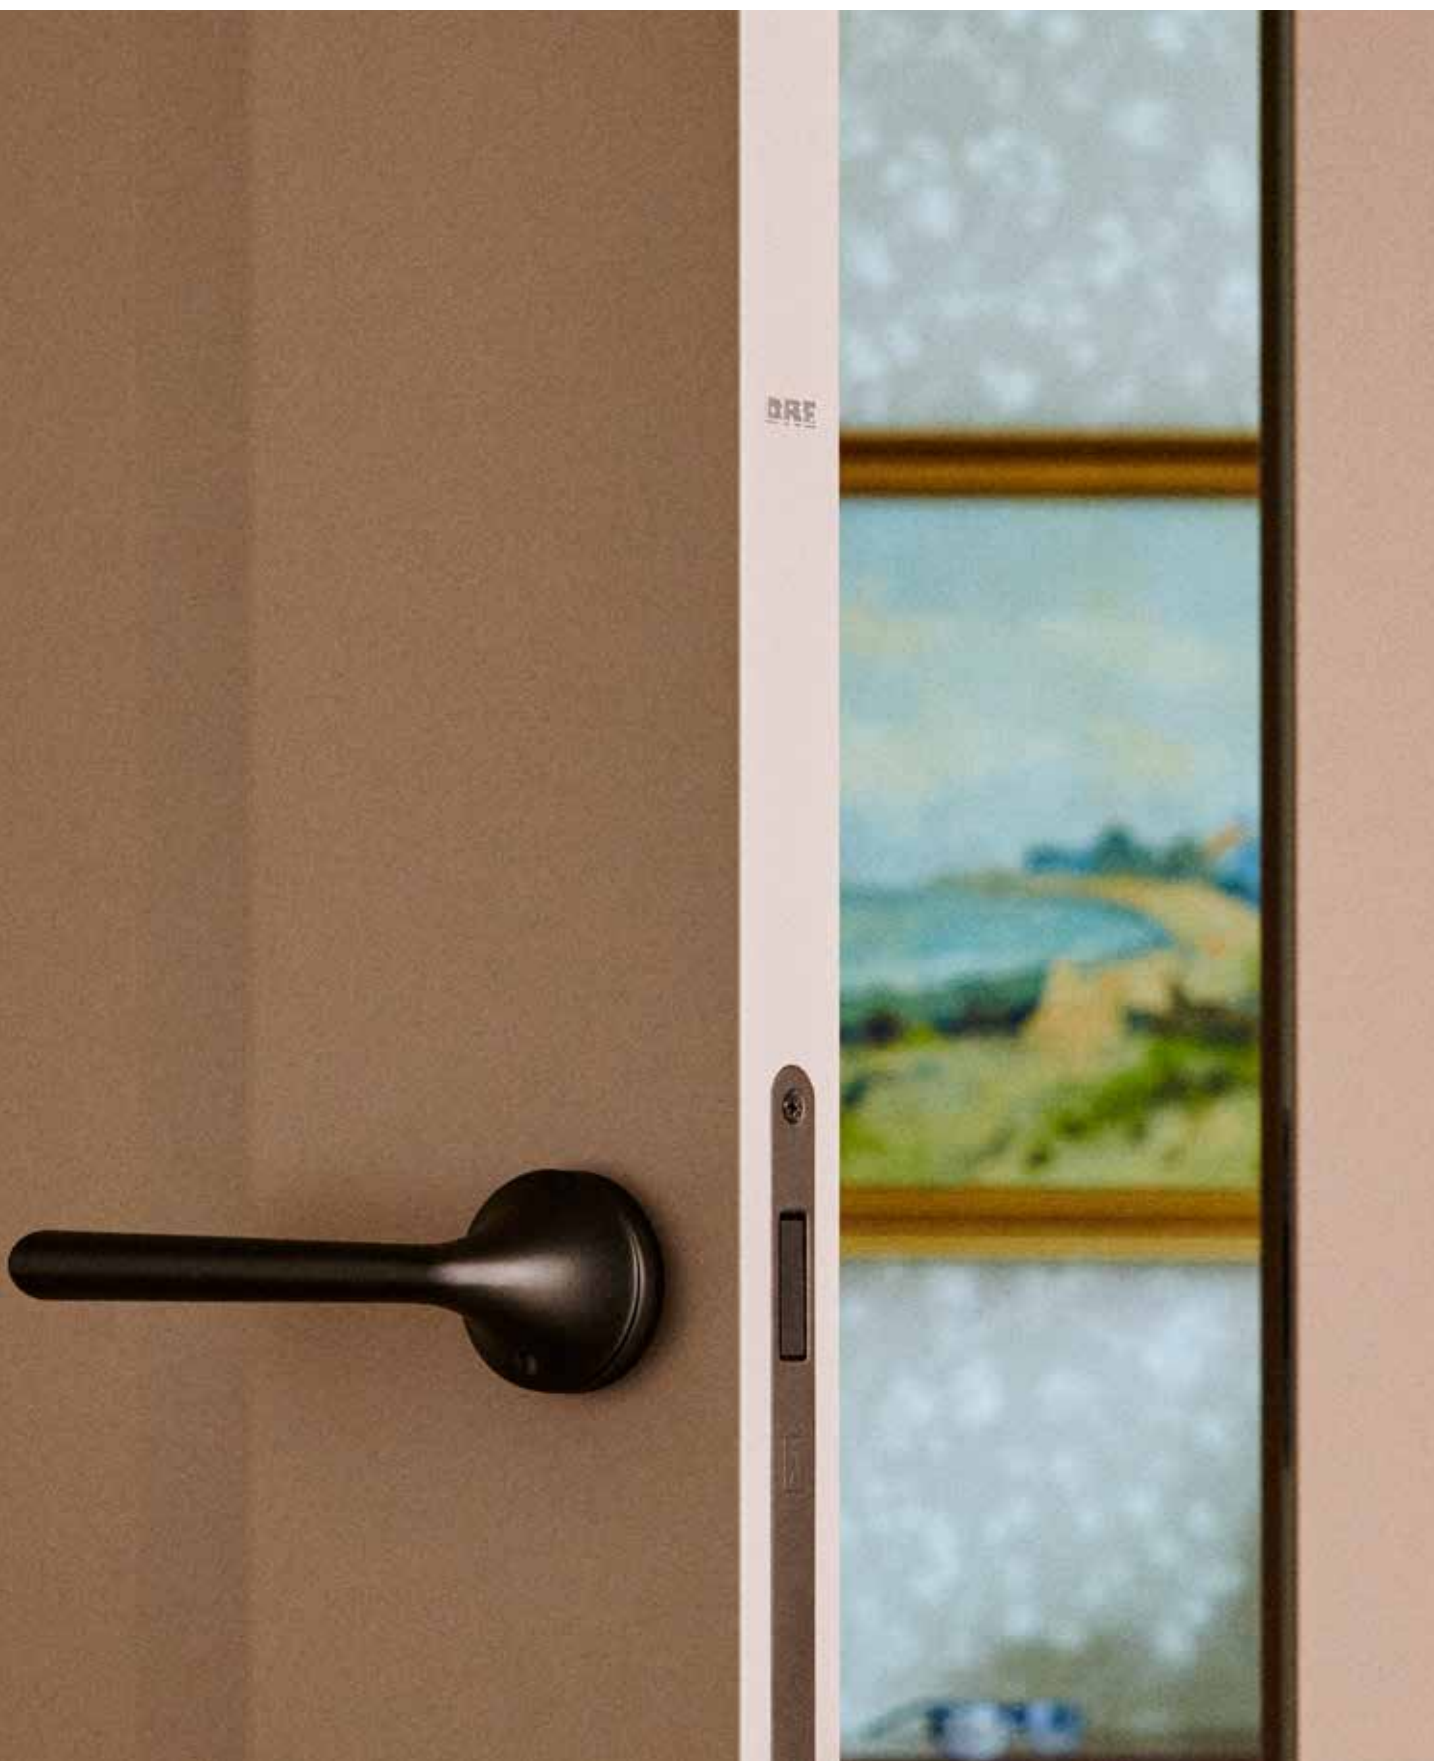

NESTOR 10 - warm grey matt

DOOR HANDLES



POLARIS door handle - chrome
inserts in DRE-Cell, 3D and CPL colors
inserts in acrylic laminates



POLARIS door handle - black matt
inserts in DRE-Cell, 3D and CPL colors
inserts in acrylic laminates



WEGA door handle - satin nickel



WEGA door handle - matt black



ATRIA door handle - satin nickel



ATRIA door handle - black matt



ORION door handle - satin nickel



ORION door handle - black matt



ARCTUS door handle - satin nickel



backplate for
simple key



backplate for
cylinder lock



backplate for
toilet lock



backplate for
simple key



backplate for
cylinder lock



backplate for
toilet lock



backplate for
simple key



backplate for
cylinder lock



backplate for
toilet lock



backplate for
simple key



backplate for
cylinder lock



backplate for
toilet lock



backplate for
simple key



backplate for
cylinder lock



backplate for
toilet lock



backplate for
simple key



backplate for
cylinder lock



backplate for
toilet lock



backplate for
simple key



backplate for
cylinder lock



backplate for
toilet lock



backplate for
simple key



backplate for
cylinder lock



backplate for
toilet lock



backplate for
simple key



backplate for
cylinder lock



backplate for
toilet lock

DOOR HANDLES



NAOS door handle - black matt



AVIOR door handle - glossy chrome



ZETA door handle - satin nickel



CORSA door handle - black matt



RUMBA handle - black



RUMBA door handle - brass matt



SCALA door handle - black



SCALA handle - brass



IMPERIA door handle - black
with lock -
without lock -



hidden locking sys-
tem in the handle



backplate for
simple key



backplate for
cylinder lock



backplate for
toilet lock

NEW



backplate for
simple key



backplate for
cylinder lock



backplate for
toilet lock



backplate for
simple key



backplate for
cylinder lock



backplate for
toilet lock



backplate for
simple key



backplate for
cylinder lock



backplate for
toilet lock



backplate for
simple key



backplate for
cylinder lock



backplate for
toilet lock



backplate for
simple key



backplate for
cylinder lock



backplate for
toilet lock



backplate for
simple key



backplate for
cylinder lock



backplate for
toilet lock



backplate for
simple key



backplate for
cylinder lock



backplate for
toilet lock



backplate for
simple key



backplate for
cylinder lock



backplate for
toilet lock

NEW

DOOR HANDLES



DIVA FIT door handle - brass



door handle IBIZA - black matt



CUBE door handle - brushed nickel



CUBE door handle - black matt



ZOJA door handle - brushed brass



ZORBA door handle - shiny chrome/satin

NEW



BELLA SLIM door handle - chocolate brown

NEW



PIXEL SLIM door handle - black

NEW



STELLA SLIM door handle - satin nickel



backplate for simple key



backplate for cylinder lock



backplate for toilet lock



backplate for simple key



backplate for cylinder lock



backplate for toilet lock



backplate for simple key



backplate for cylinder lock



backplate for toilet lock



backplate for simple key



backplate for cylinder lock



backplate for toilet lock



backplate for simple key



backplate for cylinder lock



backplate for toilet lock



backplate for simple key



backplate for cylinder lock



backplate for toilet lock



backplate for simple key



backplate for cylinder lock



backplate for toilet lock



backplate for simple key



backplate for cylinder lock



backplate for toilet lock



backplate for simple key



backplate for cylinder lock



backplate for toilet lock

DOOR HANDLES



TOPAZ door handle - stainless steel



TOPAZ door handle - stainless steel, black matt



door handle JOWISZ - stainless steel



LUNA SLIM door handle - brushed chrome



LUNA SLIM door handle - glossy brass



IBIZA door handle - nickel satin



door handle MEDA - shiny chrome
inserts in DRE-Cell, 3D and CPL colors
inserts in acrylic laminates



QUIK Fit door handle - black



DIVA FIT door handle - black matt



backplate for
simple key



backplate for
cylinder lock



backplate for
toilet lock



backplate for
simple key



backplate for
cylinder lock



backplate for
toilet lock



backplate for
simple key



backplate for
cylinder lock



backplate for
toilet lock



backplate for
simple key



backplate for
cylinder lock



backplate for
toilet lock



backplate for
simple key



backplate for
cylinder lock



backplate for
toilet lock



backplate for
simple key



backplate for
cylinder lock



backplate for
toilet lock



backplate for
simple key



backplate for
cylinder lock



backplate for
toilet lock



backplate for
simple key



backplate for
cylinder lock



backplate for
toilet lock



backplate for
simple key



backplate for
cylinder lock



backplate for
toilet lock

DOOR HANDLES



TOMA door handle - black



STARK Fit door handle - black



VARNA door handle - satin nickel



NOX slim door handle - black matt, round backplate



NOX slim door handle - black matt, square backplate



EDER door handle - black matt



ALAMBRE door handle - glossy chrome



FOKUS door handle - satin nickel velvet



UNO door handle - stainless steel



backplate for
simple key



backplate for
cylinder lock



backplate for
toilet lock



backplate for
simple key



backplate for
cylinder lock



backplate for
toilet lock



backplate for
simple key



backplate for
cylinder lock



backplate for
toilet lock



backplate for
simple key



backplate for
cylinder lock



backplate for
toilet lock



backplate for
simple key



backplate for
cylinder lock



backplate for
toilet lock



backplate for
simple key



backplate for
cylinder lock



backplate for
toilet lock



backplate for
simple key



backplate for
cylinder lock



backplate for
toilet lock



backplate for
simple key



backplate for
cylinder lock



backplate for
toilet lock



simple key
backplate



backplate for
cylinder lock



backplate for
toilet lock

DOOR HANDLES



ROMANA door handle - chrome/lacquered nickel



backplate for simple key



backplate for cylinder lock



backplate for toilet lock



TIK-QR handle - anthracite



backplate for simple key



backplate for cylinder lock



backplate for toilet lock



QUBIK door handle - varnished nickel



backplate for simple key



backplate for cylinder lock



backplate for toilet lock



MAGNI door handle - black structure



backplate for simple key



backplate for cylinder lock



backplate for toilet lock



ORGANIC door handle - gray-brown, cashmere



backplate for simple key



backplate for cylinder lock



backplate for toilet lock



cashmere



UNICO door handle - pink satin gold



backplate for simple key



backplate for cylinder lock




backplate for toilet lock



technical handle STAR TEC - class IV - stainless steel matt price for a set (door handle + cylinder backplate), door leaves thickness up to 55 mm



backplate for cylinder lock

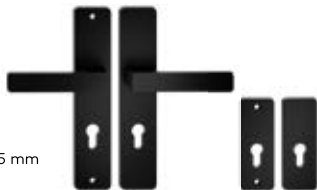

ATLAS RC0 handle and rosette to Enter / Solid door leaf black matt or stainless steel door handle rosette



ATLAS RC2 handle and rosette for SOLID RC2 model black matt or stainless steel door handle rosette



DIVA door handle and backplate for the NEFRYT RC2 spacing 72 mm, black F8 door handle rosette



DIVA door handle and backplate for the NEFRYT RC2 spacing 72 mm, stainless steel color F6 door handle rosette



DIVA door handle and back plate for NEFRYT RC3 door leaf spacing 92 mm, F8 black door handle rosette




DIVA door handle and back plate for NEFRYT RC3 door leaf spacing 92 mm, F6 stainless steel color door handle rosette

DOOR HANDLES


Note: long plates do not fit doors with magnetic locks.

ZORBA door handle with long plate - glossy chrome, spacing 72mm

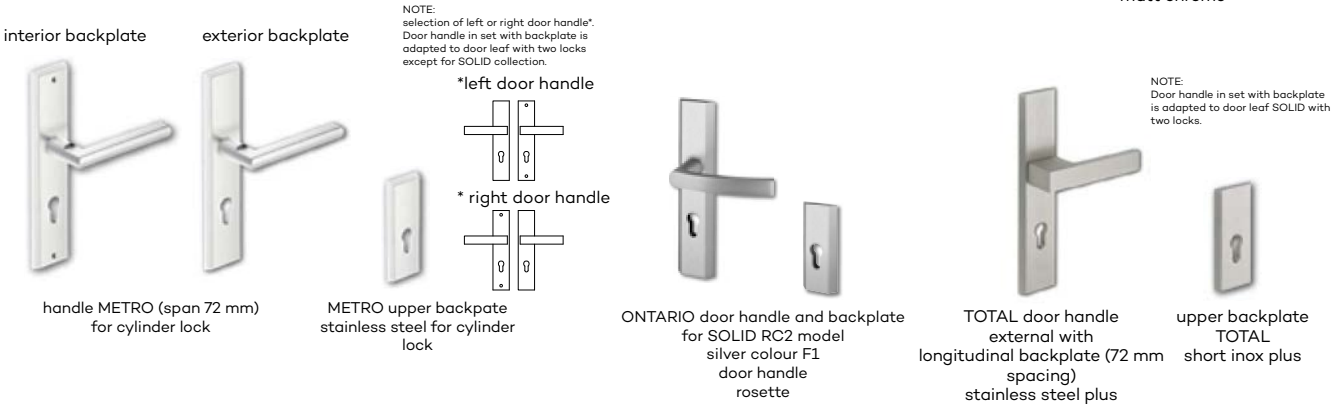

Note: long backplates do not fit doors with magnetic lock

CYLINDER LOCK INSERTS

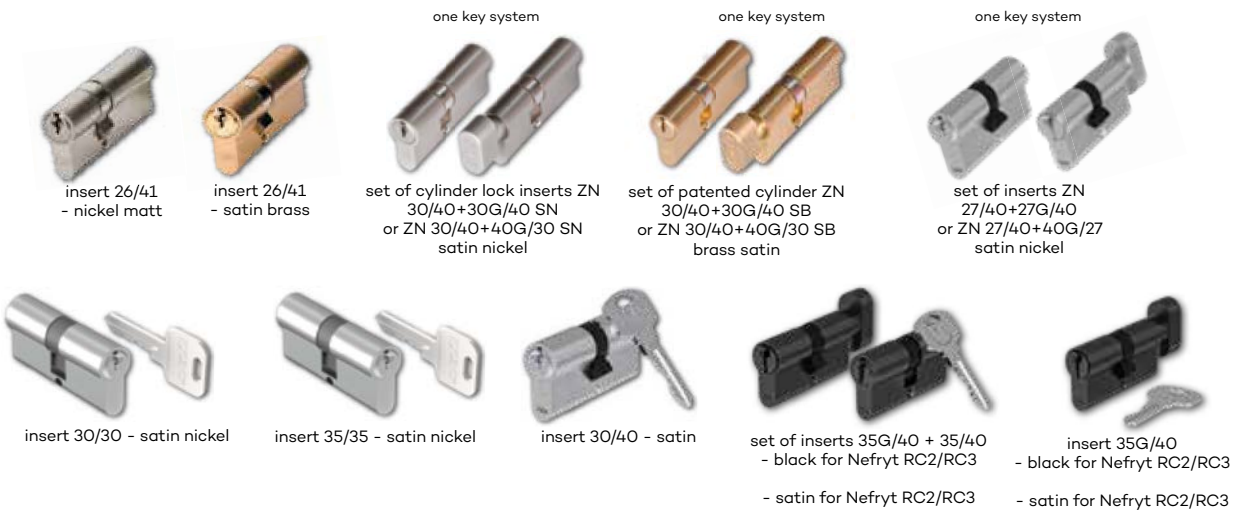

SELF CLOSER

DORMA TS-90 impuls self closer
Price.....



DORMA TS-71 selfcloser
Price.....



GEZE TS 2000 selfcloser
Price.....



GLASS



mat dre



decormat graphite



milky laminated VSG 2.2.1, smooth on both sides



decormat brown



window blind



chinchila




white bark




VSG black



grooved - available in VOLTA and GALLA collections



VETRO transparent




VETRO decormat




VETRO decormat brown



VETRO decormat graphite



VETRO pattern E laminated glass decormat













pattern VETRO E, VETRO D1 black opaque laminated glass

PRICES

Prices and availability of glass panes are listed on the door leaf pages. Glass panes in our door collections have obverse and reverse sides (except for VSG 2.2.1, VSG3.3.1 and VETRO E, VETRO D1).

DECORS


PCELL RCELL WCELL	white (wood grain structure)	white matt	white pine	siberian elm	silver	light gray matt
	sand oak	vintage oak	premium natur oak	marrone chestnut textured	evoke oak	caramel walnut
	walnut	anthracite elm	oxide concrete	antique copper	dark olive matt	dark blue matt
P HIGH GLOSS R HIGH GLOSS P STANDARD MATT R STANDARD MATT	cashmere matt	warm gray matt	sage oak (textured)	sage matt	black matt 2	
	bianco	magnolia	moro	NEW cashmere	NEW cappuccino	
	cubanit	gabbiano	bigio	bianco matt	cemento matt	moro matt
P3D R3D W3D	elm	Polish oak 3D	grand oak			
* decor available while stocks last, **decor available only in horizontal wood grain						
P SYNCHRO R SYNCHRO	halifax gray oak	halifax natural oak	Halifax Tabac Oak			
P FINISH R FINISH	alpine white	bleached craft oak	riviera oak	rustic oak		

 milky white CPL 0,2 mm thick CPL 0,7 mm thick	 gray oak CPL 0,2 mm thick CPL 0,7 mm thick	 welsh oak CPL 0,2 mm thick CPL 0,7 mm thick	 walnut CPL 0,2 mm thick CPL 0,7 mm thick	 celini walnut CPL 0,2 mm thick CPL 0,7 mm thick	 concrete 2 CPL 0,2 mm thick CPL 0,7 mm thick	  
 acacia CPL 0,2 mm thick CPL 0,7 mm thick	 honey oak CPL 0,2 mm thick CPL 0,7 mm thick	 roasted walnut CPL 0,2 mm thick CPL 0,7 mm thick	 white W0118 CPL 0,2 mm thick CPL 0,7 mm thick	 ashen CPL 0,2 mm thick CPL 0,7 mm thick	 dark gray*** CPL 0,2 mm thick CPL 0,7 mm thick	
		 anthracite CPL 0,2 mm thick CPL 0,7 mm thick	 cashmere CPL 0,15 mm thick CPL 0,7 mm	 black ST*	 natural halifax oak CPL 0,15 mm thick Door frames only	
 light casella oak H1367 ST 10 CPL 0,15 mm thick	 natural Kendal Oak H3170 ST 12 CPL 0,15 mm thick	 natural Vicenza oak H3157 ST 12 CPL 0,15 mm thick	 gray vicenza oak H3158 ST 19 CPL 0,15 mm thick	 natural hickory H3730 ST 10 CPL 0,15 mm thick		

* Black ST decor - Tecofoil double-coated with pigmented varnish, matt. The decor is assigned to the CPL price group, however, it is not a CPL laminate.
*** color available while stock last

** RAL, NCS, FLUGGER values are approximate, closest to the color of the door leaf and door frame.


Decors from LUX collection

 white Premium UV acrylic varnish RAL=9003**	 cashmere Premium UV acrylic varnish NCS = S2002-Y50R**	 latte Premium UV acrylic varnish Flugger = 4362 NCS = S1505-Y50R**	 ashen UV acrylic varnish Premium RAL=7035**	 	
 pavio oak	 viking oak	 country oak	 cannero walnut		 birch
			 uranus		

DOOR FRAMES MASKING ELEMENTS

KT2 ARCHITRAVE


KT2 80mm and 63mm architraves increase the adjustment range of the standard OR (adjustable) door frame by +10mm. The architrave must be ordered as a separate accessory. The architrave's price is available at your distributor.



ARCHITRAVES

Application: fixed door frame, fixed door frame **SOFT**

Contents of the set (for one side of the door): horizontal and two vertical strips, plastic hooks, pins and clamps. The masking architraves are packed in a cardboard box.

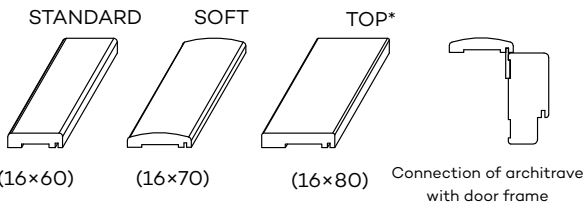

QUARTER ROUNDS

Quarter round is used to cover the angular connection between the wall and the door frame. A single item constitutes a trade unit. prices of quarter rounds

Quarter rounds require cutting before the assembly.



quarter round 16 × 16 × 2200 mm




quarter round **SOFT**
11 × 18 × 2200 mm

SKIRTING BOARDS



The length of the skirting boards is 2.62 m (except for LPP4W, LPP6W, LPP7W). Skirting boards need to be trimmed prior to installation.

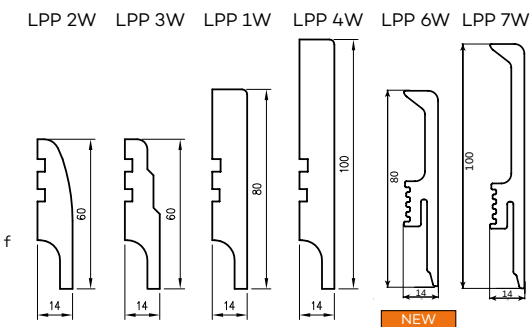

Lenght of LPP4W, LPP6W, LPP7W is 2,40 mb
It is made of moisture resistant board.

VENTILATION GRILLE

There is possibility to instal bathroom plastic ventilation grille, which is available in the following colours: white, beige, calvados, brown, silver, creamy, gray, black and ashen (except for frame construction doors, sliding doors, fire resistant doors and SOLID, ENTER) or aluminum ventilation grille

- plastic ventilation grille
- aluminum ventilation grille



plastic ventilation grille



aluminum ventilation grille

VENTILATION ACCESSORIES AND OTHERS

VENTILATION SLEEVES FOR PANEL DOORS

There is possibility to purchase a set (5 pcs) of ventilation sleeves.
DRE-Cell Decor, 3D foil, CPL laminate.



VENTILATION SLEEVES FOR FRAME CONSTRUCTION DOOR LEAF

For frame construction doors, except for VETRO with plastic sleeves (3 sleeves for doors "60", 4 sleeves for doors "70", 5 sleeves for doors "80"- "100")

PLASTIC VENTILATION SLEEVES



VENTILATION UNDERCUT

In all collections (except for SOLID, SOLID RC2, ENTER, FIRE resistant door leaves, sliding doors, folding), ventilation undercut can be made upon request.



13.5 MM HINGE FOR REBATED DOORS


- (set of lower and upper part) 13.5 mm diameter hinge in black
- extra charge for an adjustable silver hinge for a rebated door leaf



HINGE CAPS


- (set consist of 2 pcs. for 1 hinge)
- Plastic caps suitable for 13.5mm diameter hinges, with and without adjustment.

- thimble (price for 1 pcs.)




TECHNICAL INFORMATION



TYPES OF DOOR LEAF EDGES

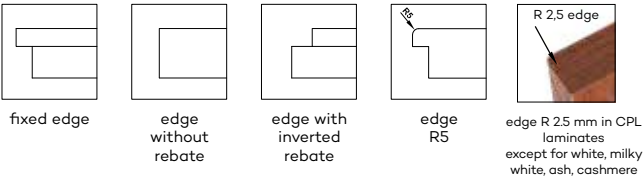


TYPES OF GLAZING FRAMES AND PANELS

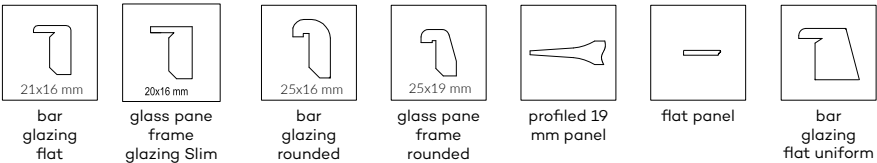


TECHNICAL INFORMATION - VETRO E SYNCHRONOUS LAMINATES, PAINTED

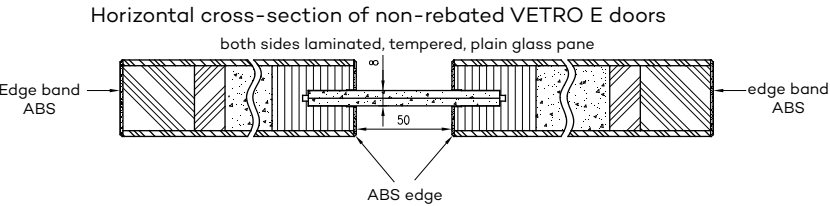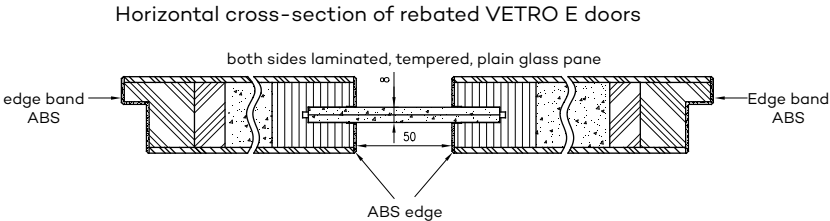

TECHNICAL INFORMATION - ESTRA

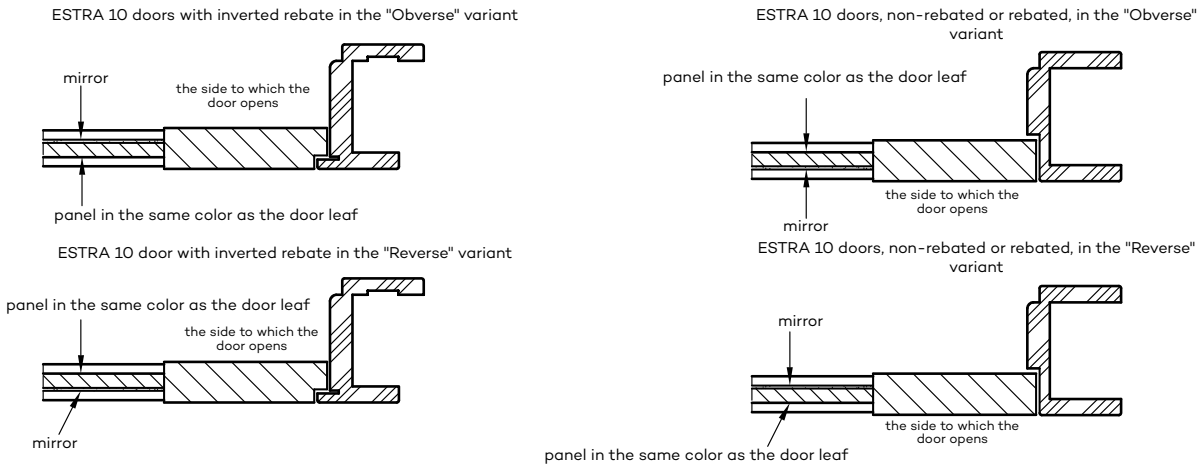

FIXED DOOR FRAME PROFILES OP, OP SOFT, OPB

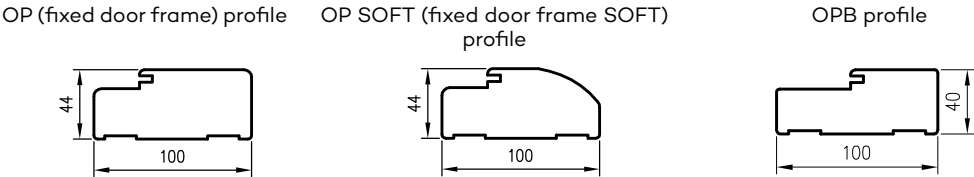


TECHNICAL INFORMATION


TECHNICAL INFORMATION - VETRO D1

NOTE: In white matt color the door leaves are also available in non-rebated door leaf.

cross-section of stile in non-rebated door leaf




A - milled edges



1.3 mm edge band


Horizontal cross-section of VETRO D1

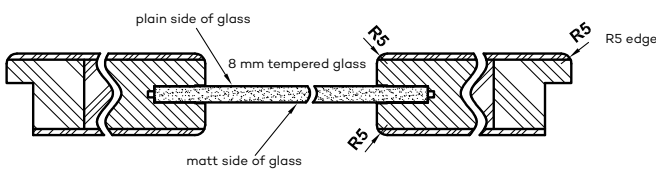

VETRO collection glass panes have obverse and reverse sides (important in juxtaposition of doors opening inversely). Presented horizontal cross-sections show the arrangement of glass pane in the obverse version. When choosing a reverse version, glass pane is rotated by 180° around the vertical axis.

WALL-MOUNTED SLIDING SYSTEM

masking strip with guide bar



Single sliding system

Dimension	Masking strip		Guide bar
door [mm]	Mz	Mw	Pa
644, 744	1620	1588	1500
844	1920	1888	1800
944	2120	2088	2000
1044	2160	2128	2000




double leaf door sliding system

Dimension	Masking strip		Guide bar
door [mm]	Mz	Mw	Pa
2 x 644	2 x 1519	2 x 1503	2 x 1500
2 x 744	2 x 1519	2 x 1503	2 x 1500
2 x 844	2 x 1819	2 x 1803	2 x 1800
2 x 944	2 x 2019	2 x 2003	2 x 2000
2 x 1044	2 x 2063	2 x 2047	2 x 2000

Single sliding system


symbol	"60"	"70"	"80"	"90"	"100"
A	602	702	802	902	1002
C	646	746	846	946	1046
D	664	764	864	964	1064
E	752	852	952	1052	1152
E*	786	886	986	1086	1186
S	644	744	844	944	1044

NS - vertical cross-section for tunnel with 63 mm architrave **NT** - vertical cross-section for tunnel with 80 mm architrave

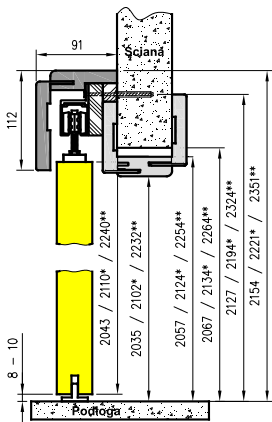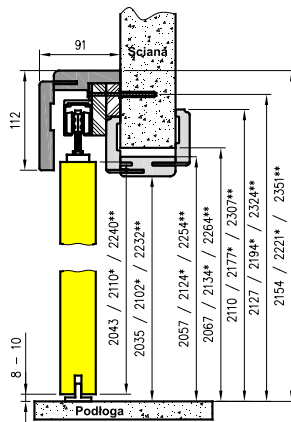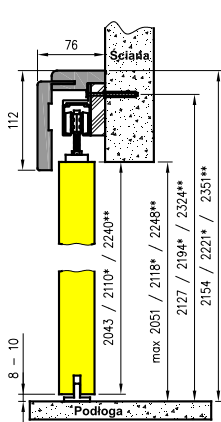


Standard dimensions height 2043,
* for the standard height 211X,
** for the standard height 224X

NS - horizontal cross-section (left system)

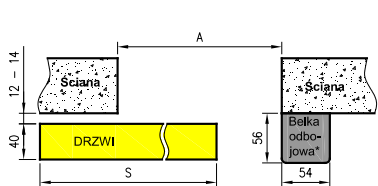

NT - horizontal cross-section (left system)

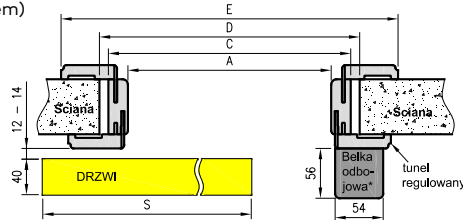

* is not available in double leaf system


E* applies to tunnel with T80 architrave
S** width of single leaf door

double leaf sliding system

symbol	"120"	"140"	"160"	"180"	"200"
A	1200	1400	1600	1800	2000
C	1244	1444	1644	1844	2044
D	1264	1464	1664	1864	2064
E	1350	1550	1750	1950	2150
E*	1384	1584	1784	1984	2184
S**	644	744	844	944	1044

TECHNICAL INFORMATION

PROFI - NON-REBATED - OPENING OUTWARDS IN ACCORDANCE WITH THE 2043, 2240 STANDARD

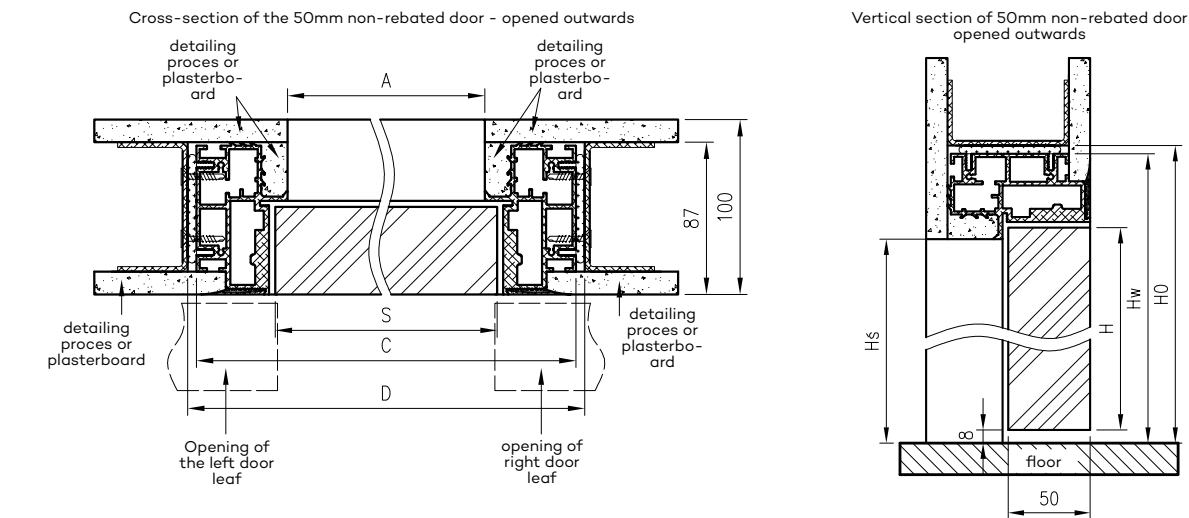


Profi door width dimensions

	S	A	C	D
"60"	600	586	690	700
"70"	700	686	790	800
"80"	800	786	890	900
"90"	900	886	990	1000
"100"	1000	986	1090	1100

Door height dimensions

stan- dard	H	H _S	hw	H ₀
2043	2043	2044	2096	2101
2240	2240	2241	2293	2298

PROFI - INVERTED REBATE - OPENING INWARDS IN ACCORDANCE WITH THE 2043, 2240 STANDARD

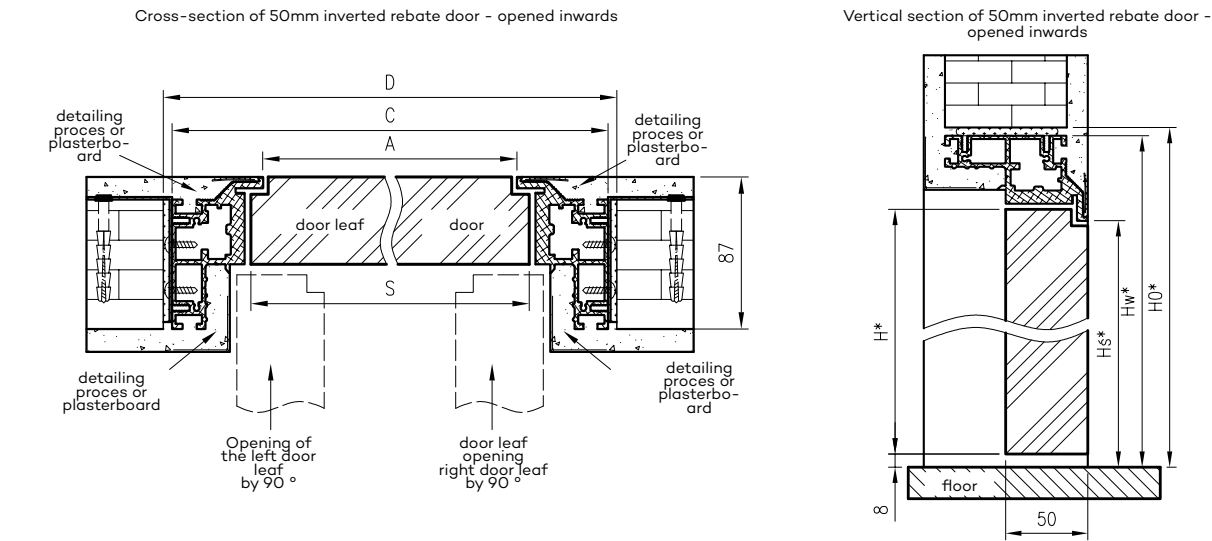

Profi door width dimensions

	S	A	C	D
"60"	600	586	690	700
"70"	700	686	790	800
"80"	800	786	890	900
"90"	900	886	990	1000
"100"	1000	986	1090	1100

Door height dimensions


stan- dard	H	H _S	hw	H ₀
2043	2053	2054	2106	2111
2240	2250	2251	2303	2308

S - door leaf width
A - width of passage in door frame unit
C - external width of door frame
D - required width of wall opening
H₀ - height of the wall opening


TECHNICAL INFORMATION

SARA ECO 2 - NON-REBATED - OUTWARD OPENING DRE DOOR FRAME

Cross- section for Sara Eco2 non-rebated doors opened outwards

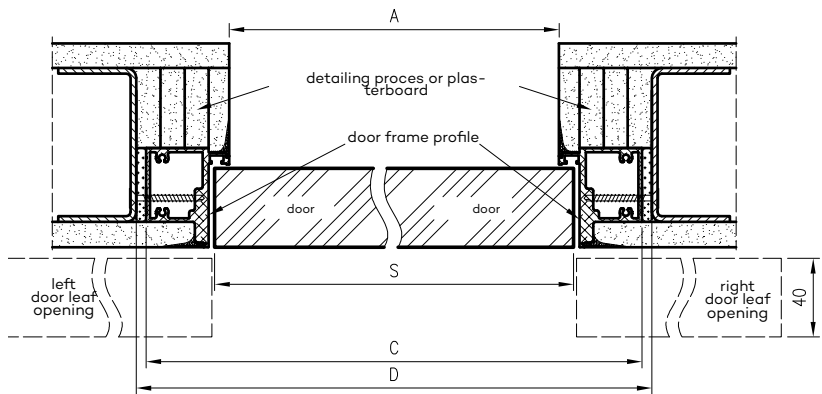

Vertical cross - section for Sara Eco2 door non-rebated - opening outwards

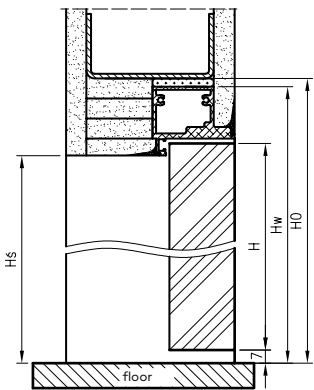


Dimensions of the door leaf width
Sara Eco 2

	S	A	C	D
"60"	620	605	690	700
"70"	720	705	790	800
"80"	820	805	890	900
"90"	920	905	990	1000
"100"	1020	1005	1090	1100

Door height dimensions


stan- dard	H	Hs	hw	H0
202x	2020	2020	2062	2070
220X	2200	2200	2242	2250
240X	2400	2400	2442	2450

DRE profile for non-rebated outward opening doors




SARA ECO 2 - INVERTED REBATE - INWARD OPENING DRE DOOR FRAME

Cross-section of Sara Eco 2 with inverted rebate - opened inwards

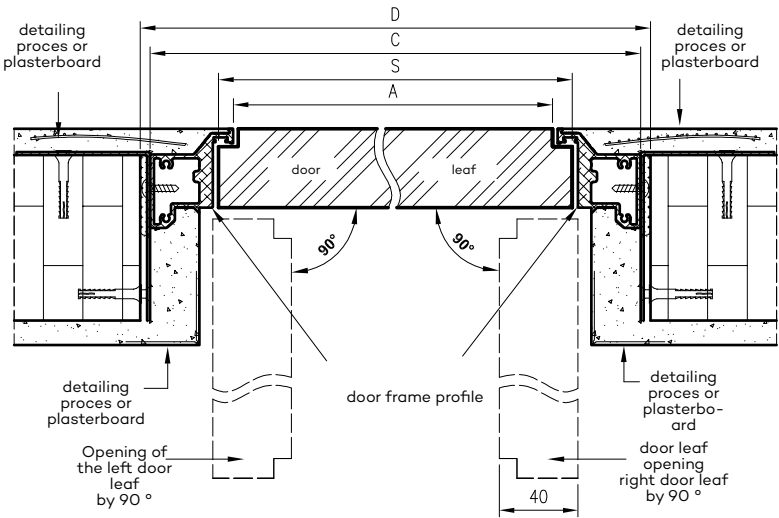

Vertical section of Sara Eco 2 with inverted rebate - opened inwards

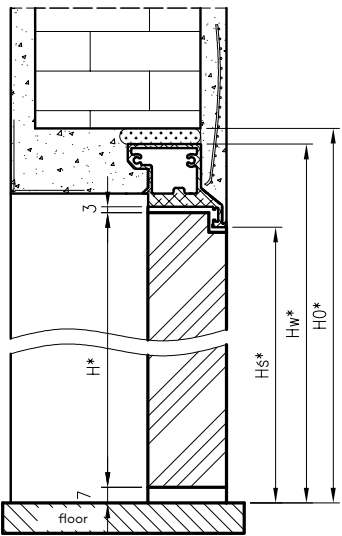

Dimensions of the door leaf width
Sara Eco 2


	S	A	C	D
"60"	620	605	690	700
"70"	720	705	790	800
"80"	820	805	890	900
"90"	920	905	990	1000
"100"	1020	1005	1090	1100

S - door leaf width
A - width of passage in door frame unit
C - external width of door frame
D - required width of wall opening

Door height dimensions


stan- dard	H*	Hs *	Hw *	H0 *
202x	2030	2030	2072	2080
220X	2210	2210	2252	2260
240X	2410	2410	2452	2460

DRE profile for doors with inverted rebate opened inwards



TECHNICAL INFORMATION

WOODEN DOOR FRAME FOR ATHOS EI 30

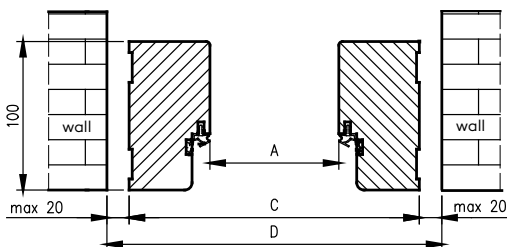


OD (wooden door frame)
dimensions for Athos doors


width.	A	C	D
"80"	802	910	934
"90"	902	1010	1034
"90E"	917	1025	1049
"100"	1002	1110	1134
"110"	1102	1210	1234

D - width of the assembly hole

Wooden door frame for
Athos door
with a fixed threshold

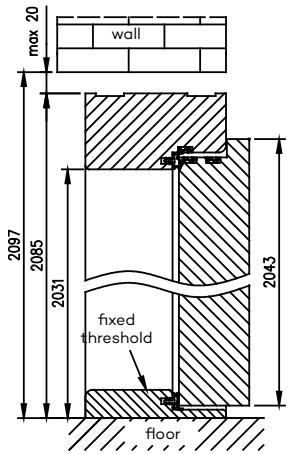


Wooden door frame for
Athos door
with dropping seal *

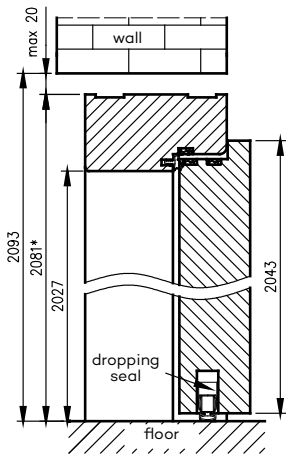

FIRE-RESISTANT WOODEN DOOR FRAME FOR OLIMP EI 30, EI 60

horizontal cross-section of
door frame in the wall

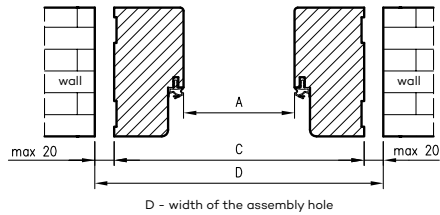

D - width of the assembly hole


OD OLIMP EI30 wooden door frame
for single-leaf doors

	A	C	D
80	802	910	934
90	902	1010	1034
90E	917	1025	1049
100	1002	1110	1134
110	1102	1210	1234


OD OLIMP EI60 wooden door frame
for single-leaf doors

	A	C	D
80	804	912	936
90	904	1012	1036
90E	933	1041	1065
100	1004	1112	1136
110	1104	1212	1236


Cross-section of the wooden door
frame for OLIMP EI30 doors

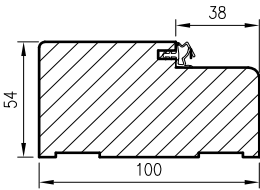

Cross-section of the wooden door
frame for OLIMP EI60 doors



vertical cross-section
of fire-resistance door leaf.

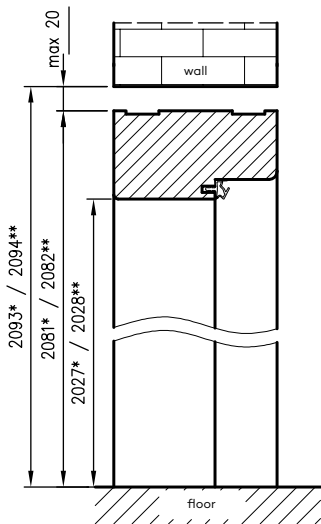


* dimensions of OD OLIMP EI 30 wooden door frame

** dimensions of OD OLIMP EI 60 wooden door frame


TECHNICAL INFORMATION

STEEL FIXED DOOR FRAME FOR OLIMP EI 60

OLIMP EI-60 door leaf vertical cross-section

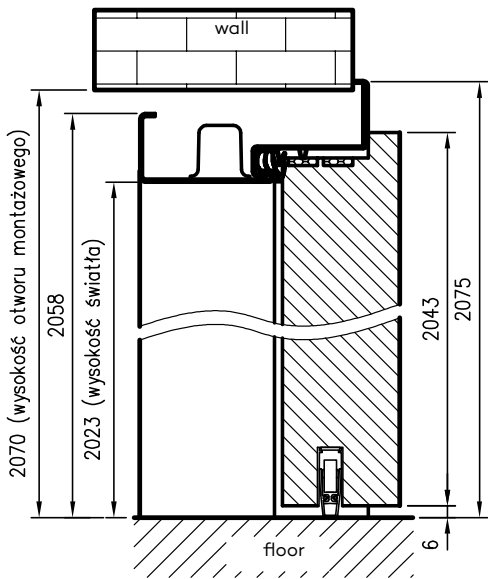


horizontal cross-section of door frame mounted in the wall

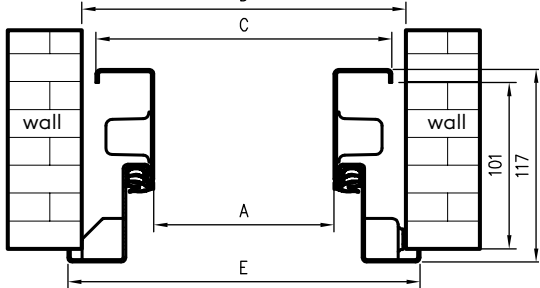

D - width of the assembly hole

door frame profile

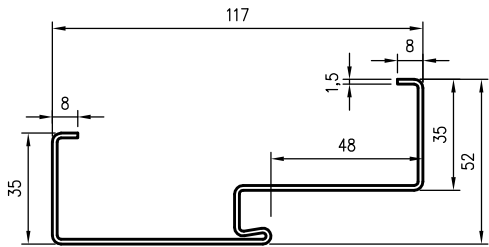

Olimp EI60 dimensions for single leaf doors

	A	C	D	E
"80"	797	867	884	901
"90"	897	967	984	1001
"90E"	926	996	1013	1030
"100"	997	1067	1084	1101
"110"	1097	1167	1184	1201




threefold hinge




Hinge SIMONSWERK VX 7939/160 (for door widths "100" and "110")

DIMENSIONS OF THE DOOR LEAVES AND ARRANGEMENT OF FITTINGS FOR GALLA GLASS DOORS

glass door leaf
a) swing

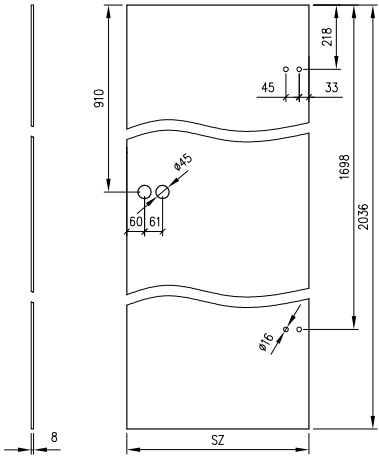

b) sliding

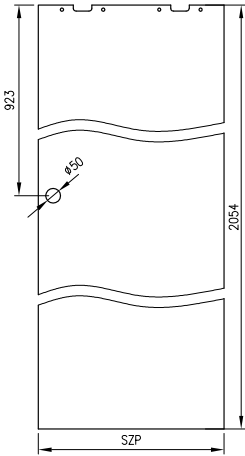

DOOR LEAF WIDTH

Symbol of the door dimension	SZ	SZP
"60"	617	630
"70"	717	730
"80"	817	830
"90"	917	930

SZ - width of glass swing door leaf

SZP - width of glass sliding door leaf


DOOR LEAF HEIGHT

2036 mm - height of glass swing door leaf

2054 mm - height of glass sliding door leaf

TECHNICAL INFORMATION

DOOR LEAF DIMENSION AND PLACEMENT OF HINGES

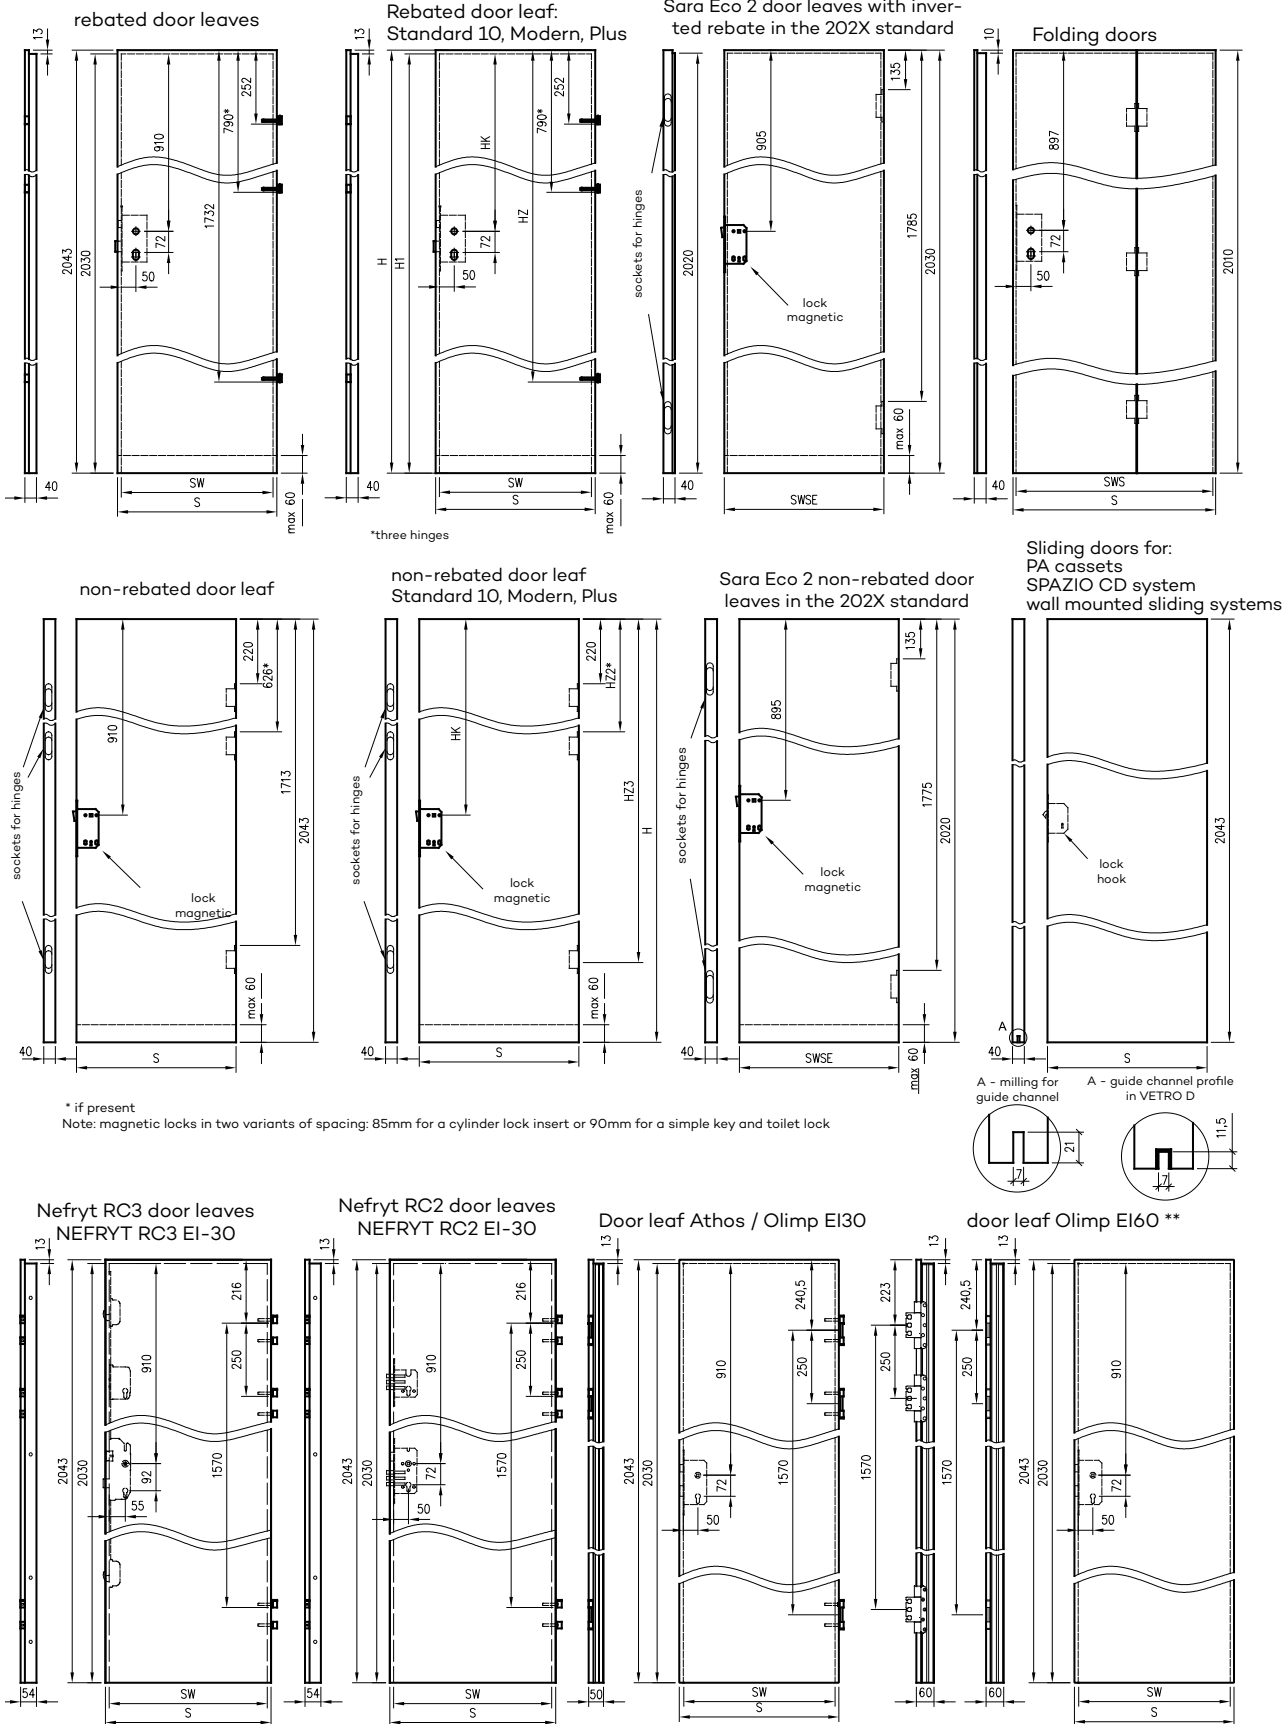

TECHNICAL INFORMATION

DOOR LEAF WIDTH

Symbol of the door dimension	S	SW	SWSE	SWS
"60"	644	618	620	,-
"60N"	624	,-	,-	,-
"70"	744	718	720	,-
"70N"	724	,-	,-	,-
"80"	844	818	820	824
"80N"	824	,-	,-	,-
"90"	944	918	920	924
"90N"	924	,-	,-	,-
"100"	1044	1018	1020	1024
"100N"	1024	,-	,-	,-
"110"	1144	1118	,-	,-

S - total door leaf width
SW - width in the rebate (refers to rebated door leaf)
SWSE - Sara Eco 2 leaf width
SWS - width in the rebate of folding door leaf
* - width "110" is only available in door leaves Standard 10, Athos, Enter Acoustic and Olimp

NOTE: Total width of "40" side panels is 444 mm.

"xN" - width standard for selected non-rebated panel and frame construction doors - single-leaf in 2043 standard

The investment standard "90E" provides 900mm passage in the door frame with the door leaf opened at an angle of 90°

ADDITIONAL LEAF WIDTHS

Symbol of the door dimension	S	SW
"90E" for OLIMP EI30, ATHOS	959	933
"90E" for OLIMP EI60	973	947
"90E" for STANDARD, ENTER, ENTER AKUSTIK, SOLID, SOLID RC2	948	922

Symbol of the door dimension	S	SW
Nefryt RC2 / RC3	"80E"	865
	"90E"	965
	"100E"	1065

DIMENSIONS OF THE DOOR LEAF WITH 4 VARIABLE HEIGHTS

(refers to door leaf STANDARD 10 and collections MODERN and PLUS)

H	H1	HK	HZ	HZ2	HZ3
1983	1970	850	1672	606	1653
2043	2030	910	1732	626	1713
2110	2097	977	1799	647	1780
2240	2227	1107	1929	691	1910

H - total height of the door leaf
H1 - door leaf height in the rebate
HK - distance from the top rebate of door leaf to the axis of the handle
HZ - distance from the upper edge of the door leaf to the mounting point of the third hinge

DOOR LEAF HEIGHT

2043 mm - total height of rebated and non-rebated door leaf (2010 for folding doors)
2030 mm - height of the rebated door leaves in the rebate (2020 for Sara Eco 2 door leaves with the inverted rebate, 2000 for folded doors)
2055 mm - total height of the door leaves with inverted rebate
1983, 2043, 2110, 2240 mm - total possible height of STANDARD 10 door leaf and MODERN and PLUS collection (1970, 2030, 2097, 2227 mm - measured in the door leaf rebate)

SHORTENING OF DOOR LEAF

There is possibility to shorten the leaves yourself, by a maximum of 60 mm (VETRO, fire-resistance doors, NEFRYT all collections in the sliding version, passive leaves, glass leaves, folding leaves and leaves with a dropp seal cannot be shortened).

NOTE: The door leaf after recuperative undercut - 8 mm, is adapted to be shortened by oneself, by a maximum of 52 mm.

CLEARANCE BETWEEN DOOR LEAF AND FLOOR

standard clearance between door leaf and finished floor is 8 mm high (15 mm in FOLDE door leaf, 5-6 mm in OLIMP door leaf).

NOTES REFERED TO HINGE

In rebated door leaf: frame construction doors, entrance (Enter, Enter Acoustic, Solid) and in the other collections with size wider than "90", 3 screw-in pivot hinges of ø 13,5 mm are mounted. For other interior rebated leaves, there is possibility to choose 2 or 3 hinges.

SOLID RC2, ATHOS, NEFRYT RC2, NEFRYT RC3 and OLIMP EI30 door leaves are equipped with 3 tripartite hinges.

The OLIMP EI60 leaves, depending on the width, are equipped with 3 three-part hinges or 3 SIMONSWERK hinges VX 7939/160.

Non-rebated door leaf come with pre-milled sockets for two or three hidden concealed hinges which are attached together with non-rebated door frame.

Sara Eco 2 door leaves with inverted rebate and non-rebated doors have milled sockets for recessed hinges, which are packed together with the door frame.

Folding doors come with 3 hidden recessed hinges which join two parts of door leaf.

Door leaves with inverted rebate have sockets for two concealed hinges, which are packed together with door frame.

Non-rebated door leaf



edge
without rebate



magnetic
lock



recessed
hinge

REBATED DOOR LEAF



fixed edge



screw-in
hinge



threefold
hinge



upper deadbolt lock

TECHNICAL INFORMATION

DOOR LEAF THICKNESS AND SELECTION OF CYLINDER INSERT

Door leaf type	Door leaf thickness	proportion in the door leaf (WO/ZO)	recommended** dimension of the cylinder insert (W/Z)	Refers to cylinder insert with door knob	
				Cylinder insert with a knob on the inside (W/Z)	Cylinder Insert with a door knob outside (W/Z)
rebated door leaf	40	14 / 26	25 / 40 ; 26 / 36 26 / 41 ; 30 / 40	25G/40; 26G/36 26G/41; 30G/40 27G/40	25/40G; 26/36G 26/41G; 30/40G 27/40G
Sara Eco 2 inverted rebate door leaves	40	24 / 16	35 / 30 ; 36 / 26 36 / 31 ; 40 / 30	35G/30; 36G/26 36G/31; 40G/30	35/30G; 36/26G 36/31G; 40/30G
Non-rebated door leaf	40	20 / 20	31 / 31 ; 30 / 30 35 / 35	31G/31; 30G/30 35G / 35	
Profi non-rebated door leaves	50	25/25	35/35; 36/36 40/40; 41/41	35G/35 ; 36G/36 41G/41 ; 40G/40	
Non-rebated door leaf Sara Eco 2	40	16 / 24	30 / 35 ; 26 / 36 31 / 36 ; 30 / 40	30G/35; 26G/36 31G/36; 30G/40	30/35G; 26/36G 31/36G; 30/40G
Door leaf with inverted rebate	40	27 / 13	40 / 25 ; 41 / 26	40G/25; 41G/26	40/25G; 41/26G
Profi Door leaf with inverted rebate	50	30/20	40/30; 41/31 45/35	40G/30 ; 41G/31 45G/35	40/30G ; 41/31G 45/35G
Folding doors	40	17/23	30/35; 31/36 30/40	30G/35; 31G/36 30G / 40	30/35G; 31/36G 30 / 40G
fire resistance Athos	50	21 / 29	31 / 41 ; 35 / 40	31G/41; 35G/40	31/41G; 35/40G
Olimp EI30	50	18 / 32	30 / 45 ; 31 / 46	30G/45; 31G/46	30/45G; 31/46G
Olimp EI60	60	28 / 32	40 / 45 ; 41 / 46	40G/45; 41G/46	40/45G; 41 / 46G
SOLID RC2	40,6	14 / 26,6	26 / 40 ; 26 / 41 30 / 40		
NEFRYT RC2, RC2 EI 30 NEFRYT RC3, RC3 EI 30	54	27,5/26,5	35/40	35G/40	35G/40

* The inserts are reversible - i.e. 25/40 = 40/25, 26G/36 = 36/26G
**recommended dimensions (assuming that backplate is 10 mm thick, and patented cylinder doesnt exceed 5 mm above backplate).

Fig. Selection of the cylinder insert dimensions





fig. selection of cylinder insert dimension with door knob

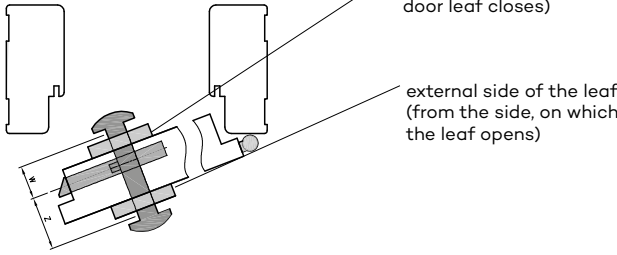


Dimension of cylinder insert is calculated using the following formula:
 $WO + \text{backplate thickness} + 2 \div 3\text{mm} / ZO + \text{backplate thickness} + 2 \div 3\text{mm}$
where:
WO and ZO - values have been presented in the table above
thickness of the backplate - measured (presented values in above table assume that backplate is 10mm thick)

Selection of backplate with door knob - if we want to mount a knob on:

- the inner side of door leaf - symbol of the door knob must be next to "W" dimension (see column 5 in the table)
- the external side of the leaf - symbol of the door knob must be next to "Z" dimension (see column 6 in the table)

SINGLE LEAF REBATED DOOR

We offer left, right and central door leaf

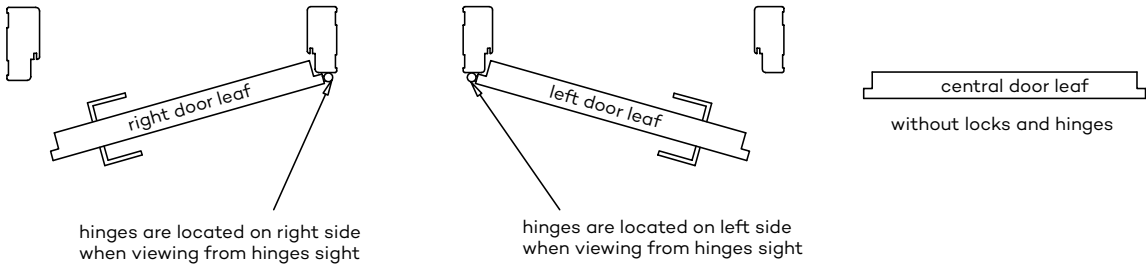


TECHNICAL INFORMATION

DOUBLE LEAF REBATED DOOR

We offer double leaf doors: the right - then right door leaf becomes an active one and left door leaf becomes passive, and double left leaf - left leaf is an active one and the right one is passive.

An active door leaf has a rebate and a lock as a standard option. In double leaf door there is available only straight edge.

Inactive door leaf comes with a "counter rebate" and additionally is equipped with a latch strike plate and a flush bolt as a standard fitting (A)

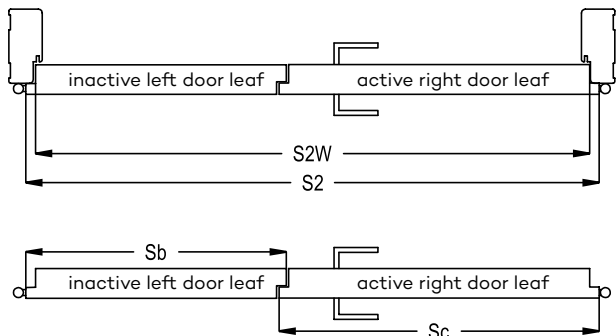

flush bolt (A)

Only door frames produced by DRE fit double-leaf doors, that is the reason that we recommend to our customers to buy doors as a complete sets.

Whole DRE set comprises of 2 door leaf and door frame.

price of double leaf door

=

leaf price x2


+

price of the fire resistance

Symbol of door dimension	dimension in [mm]		
	S2	S2W	combination* Sc+Sb
"100d"	1078	1052	644+444
"110d"	1178	1152	744+444
"120"	1278	1252	844+444; 644+644
"130"	1378	1352	944+444; 744+644; 644+744
"140"	1478	1452	1044+444; 844+644; 744+744; 644+844
"150"	1578	1552	944+644; 844+744; 744+844; 644+944
"160"	1678	1652	1044+644; 944+744; 844+844;
			744+944; 644+1044
"170"	1778	1752	1044+744; 944+844; 844+944; 744+1044
"180"	1878	1852	1044+844; 944+944; 844+1044
"190"	1978	1952	1044+944; 944+1044
"200"	2078	2052	1044+1044
combination* possible combination of active (Sc) and inactive (Sb) leaf width			

NON-REBATED DOOR LEAF - SLIDING VERSION

We offer left, right and central door leaf (door leaf without a lock and handle)

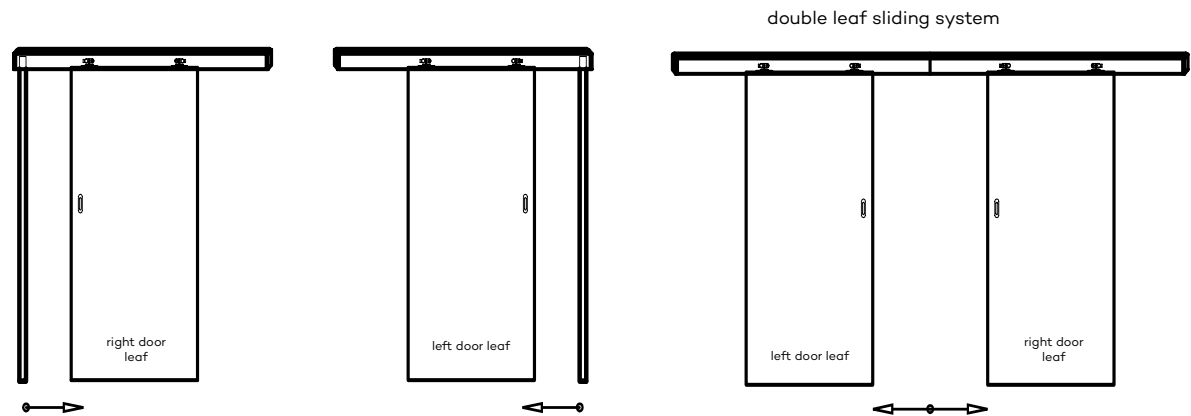


when active leaf is equipped with lock non-active leaf is equipped with latch strike plate

TECHNICAL INFORMATION

SINGLE LEAF DOOR NON-REBATED

We offer left, right and central door leaf

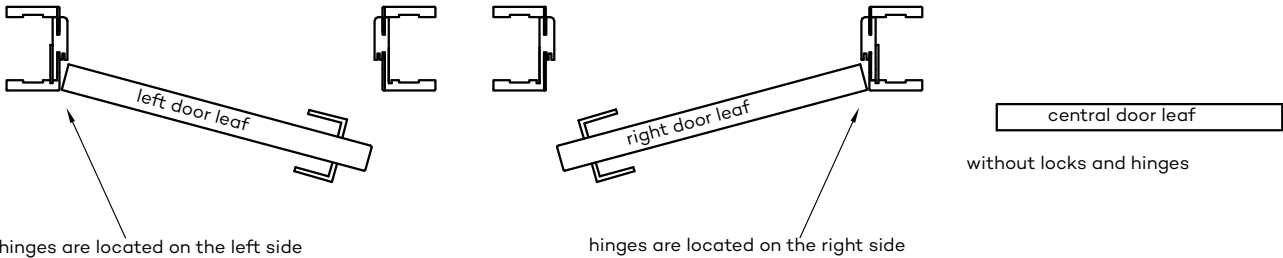


when viewing from the side of the room (door leaf unit is opened towards opening direction)

NOTE: the mechanical lock option for non-rebated doors is only available for single-leaf doors

DOUBLE LEAF NON-REBATED DOOR

We offer double leaf doors: the right - then right door leaf becomes an active one and left door leaf becomes passive, and double left leaf - left leaf is an active one and the right one is passive.

An active door leaf has lock as a standard option. Inactive door leaf is equipped with a latch strike plate and a flush bolt as a standard fitting.

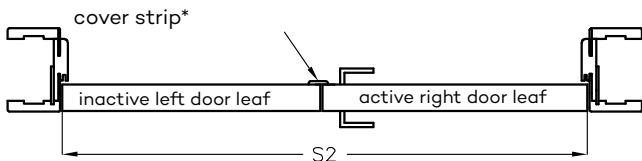

* for double leaf non-rebated doors there is possibility to purchase cover stripe width of cover stripe 30 mm

price of double leaf door

=

leaf price x2

+

price of the fire resistance


Symbol of door dimension	dimension in [mm]	
	S2	combination* Sc+Sb
"120"	1291	644+644
"130"	1391	744+644; 644+744
"140"	1491	844+644; 744+744; 644+844
"150"	1591	944+644; 844+744; 744+844; 644+944
"160"	1691	1044+644; 944+744; 844+844;
		744+944; 644+1044
"170"	1791	1044+744; 944+844; 844+944; 744+1044
"180"	1891	1044+844; 944+944; 844+1044
combination* - possible combination of active (Sc) and inactive (Sb) leaf width		

CONSTRUCTION OF PANEL DOORS


- door leaf frame made of coniferous wood or MDF
- Core: stabilizing insert "honeycomb" (A), perforated chipboard (B) and in fire proof doors: chipboard
- 3 mm HDF external board or 4 mm HDF external board (Finea, Finea B, Enter, Enter Akustik, Solid)
- type of edge straight or without rebate

External boards of door leaf is finished with:
a) in DRE-Cell decor collection - decorative foil based on the polypropylene
b) in 3D foil - 3D foil based on decorative paper
c) in CPL laminate - CPL laminate th. 0.15-0.2mm or 0.7 mm

Fire resistant door leaf Olimp EI30

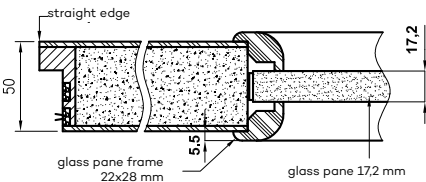

Fire resistant door leaf Olimp EI60

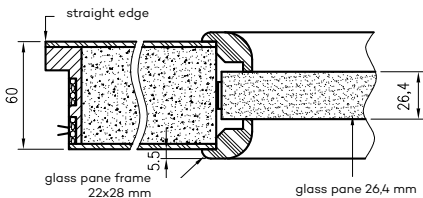


A. Stabilizing insert "honeycomb"


B. Tubular chipboard

TECHNICAL INFORMATION


Anti-burglary door leaf SOLID RC2

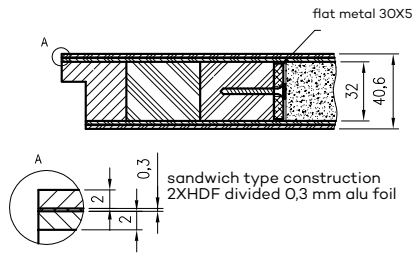


Fire-resistant door leaf Forca EI30

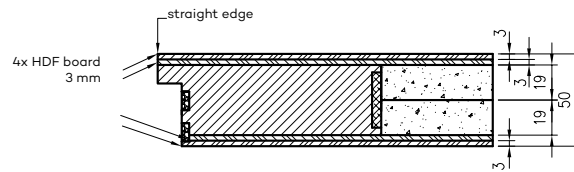

Anti-burglary and fire-resistant door leaf NEFRYT RC2/RC3 EI-30

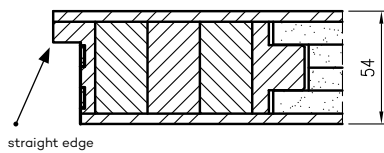

NEFRYT RC2/RC3 anti-burglary door leaf

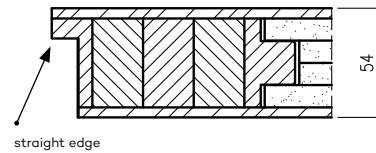

FRAME CONSTRUCTION DOOR LEAF CONSTRUCTION (DOES NOT APPLY TO VETRO D COLLECTION)

Frame construction door leaf is entirely made of wood-based panels:

vertical stiles made of wood-based panels - 40 mm


external horizontal stiles made of wood-based panels - 35 mm

horizontal rails (interior):


- wood-based boards - 22 mm in Lumio, Vico, Auri, Piano, Even, Premium, Fosca, Verso, Reva, Triesta*, Ena* door leaves (* In Ena 1-2, Triesta 1-2, 1-2 collections, the frame near the large glass pane is made of wood-based boards - 35 mm. In Ena 3-5 and Triesta 3 models, two frames near the large glass panes are made of wood-based boards - 35 mm.)

- wood-based boards - 35 mm in Nestor, Scala, Berge, Estra door leaves.


Horizontal cross-section of door leaf Lumio, Vico, Auri, Piano, Premium, Fosca, Verso, Ena, Even, Triesta, Reva,

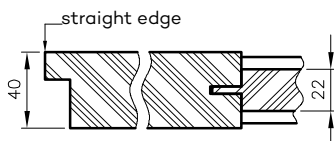


Horizontal cross-section of Nestor



Horizontal cross-section of Ena and Triesta doors (cross-section at the height of the frame next to the large glass)



Horizontal cross section of the door leaf Scala, Berge



FILLINGS OF FRAME CONSTRUCTION DOOR LEAF:

Scala A; - 4 mm glass pane, flat 4 mm HDF board

Scala B - 4 mm glass pane, 19 mm MDF profiled board

Premium 1-3 - 4 mm glass pane

Premium 4-7, 12 - 4 mm glass pane, 4 mm HDF marquetrys made in door leaf colour

Premium 8-11, 13 - 4 mm glass pane, 4 mm HDF marquetrys coated with silver laminate

Piano 1-6 - 4 mm glass pane, 16 mm MDF profiled board

Piano 9-12 - 4 mm glass pane, 19 mm MDF profiled board

Fosca 1-3 - 4 mm glass pane, 4 mm HDF board coated with silver laminate

Fosca 4-6 - 4 mm HDF board coated with veneer in door leaf colour


Nestor, Berge - 4 mm glass, 19 mm profiled MDF panel

Ena, Triesta, Auri, Even, Reva, Verso - 4 mm glass

Estra - 4 mm glass, 16 mm flat MDF panel, undercutted

Volta - 6 mm glass pane

Panel profile
19mm MDF (Scala B, Piano
9-12, Nestor, Berge)



Panel profile
16mm MDF (Piano 1,2,5,6)



Panel profile
16mm MDF (Estra 1-3, 5, 11)



TECHNICAL INFORMATION

REMAINING TECHNICAL INFORMATION:

1. While maintaining the standard dimensions of door leaves and door frames, the gap between the "ready" floor and the lower edge of the door leaf is 8 mm. In order to reduce the above gap, the door frame should be shortened appropriately from the bottom (does not apply to FOLDE and OLIMP).
2. Note! Prior to the purchase and assembly of construction woodwork, check whether the selected type of joinery meet technical requirements of the project and technical drawings, it is particularly necessary to make sure that the construction of walls and ceilings allows for the mounting of construction woodwork of weight specified in the table below:

	door leaf			Door frames		other products	
	interior	entrance	fire-resistance	adjustable	fixed	Adjustable tunnel	Sliding system
Max weight	50 kg*	50 kg*	105 kg*	40 kg	20 kg	40 kg	20 kg

* max weight of single leaf door

3. Door leaf is wrapped in shrink film and the edges are additionally protected with Styrofoam or cardboard inserts.
4. The price of the door leaves does not include the handle, backplates and cylinder insert (except for SCALA A and B collections in the rebated and non-rebated turn-only versions in DRE-Cell veneer and 3D foil, BINITO collection in the rebated and non-rebated turn-only versions painted with acrylic varnish, in which the handle and backplates are for net).
5. There is possibility to purchase CENTRAL doors and frames (without pre-drilled holes for the lock and hinges - this option is not available for fire-rated doors, ENTER/SOLID, ENTER AKUSTIK, NEFRYT RC2, NEFRYT RC3, SOLID RC2, Sara Eco 2, FOLDE) for the price of a similar product with fittings and pre-drilled holes. CENTRAL frames have seals. Fittings are not included.
6. Under the current regulations, doors to the bathroom, wash room and a separate toilets must be opened to the outwards have width of at least 0,8 meter and height of 2 meter and also have on the bottom part openings with their total surface not smaller than 0,022 m2, in order to fulfill correct air circulation. Door ventilation surface is the sum of the available ventilation components: ventilation grille (ensures the ventilation surface of 0,022 m2 in all widths of doors) or ventilation undercut or ventilation sleeves, and the surface of the ground clearance between door leaf and the floor.

Ensuring ventilation surface for rebated doors**

Symbol of door leaf dimension	doors with ventilation sleeves		doors with ventilation undercut	
	ventilation surface of sleeves and the clearance 8 mm [m2]	required clearance to meet ventilation requirements [in mm]	ventilation surface of the undercut and the clearance 8 mm [m2]	required clearance to meet ventilation requirements [in mm]
"100"	0,011	19*	0,033	0
"90"	0,010	21*	0,029	1
"80"	0,009	24*	0,025	4
"70"	0,008	28*	0,021	14*
"60"	0,007	33*	0,018	35*

Ensuring ventilation surface for Sara Eco 2 doors and all non-rebated doors

Symbol of door leaf dimension	doors with ventilation sleeves		doors with ventilation undercut	
	ventilation surface of sleeves and the clearance 8 mm [m2]	required clearance to meet ventilation requirements [in mm]	ventilation surface of the undercut and the clearance 8 mm [m2]	required clearance to meet ventilation requirements [in mm]
"100"	0,0112	19*	0,033	0
"90"	0,0104	21*	0,029	1
"80"	0,0096	23*	0,025	4
"70"	0,0082	27*	0,021	12*
"60"	0,0074	32*	0,018	31*



The above - stated required clearance height of the space under the door assures total ventilation surface of 0.022 m2. The standard clearance for door leaf is 8mm high.

* it is necessary to increase the clearance to the specified height by shortening door leaf at the bottom (when such a shortening is possible - see**)

** Exceptions that are not included in the table (door leaf that can not be shortened):


- Vetro D and E collections – the use of a ventilation undercut in doors with a width of "80"- "100" and a standard clearance under the door (8 mm) will ensure compliance with the ventilation requirement.
- Sliding doors – due to the design of the sliding system (distance from the wall/tunnel by 12-14 mm), they meet the ventilation requirement without the need to use additional options.

there is no possibility to shorten double leaf doors and folding doors FOLDE.

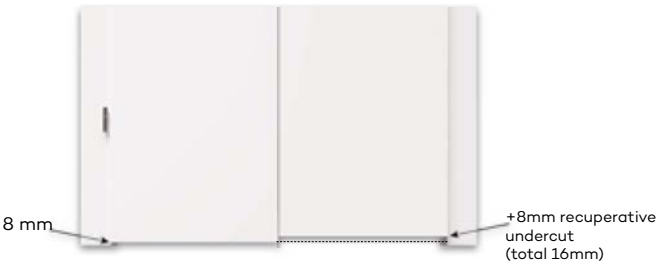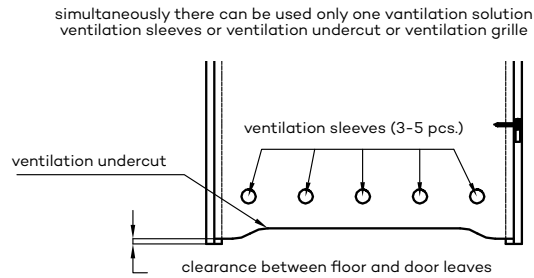

TECHNICAL INFORMATION


VENTILATION UNDERCUT



KICK PLATES

Kick plates so called „OKOPNIKI“ it is finishing solution for selected panel door models with straight edge. We offer door leaf covered with thin 0.6 mm metal sheets made of stainless steel optional bottom and middle panels. It is also possible that both of panels are installed at the same time on the selected door leaf. Height of the panel is 300 mm. Door leaf with kick plates must be filled with perforated chipboard. There is possibility to order door leaf with bottom panel and ventilation undercut.

NOTE: If you wish to place an order, please contact the Customer Service Department.

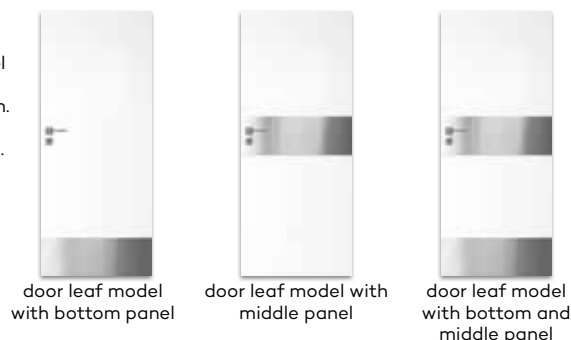

EXPLANATIONS:

	flush doors , DRE - Cell veneer		PROFI flush doors
	frame and panel doors, DRE - Cell veneer		flush doors Sara Eco 2
	entrance doors, DRE - Cell veneer		smoke-proof technical doors
	flush doors, 3D veneer		fire resistant technical doors
	frame and panel doors, 3D foil		anti-burglary doors
	entrance doors, 3D veneer		flush doors, lacquered
	flush doors, Finish foil		flush doors, synchronous laminate
	frame and panel doors, Finish veneer		frame and panel doors, synchronous laminate
	flush doors, painted		frame and panel doors, glossy
	frame and panel doors, painted		flush doors, glossy
	flush doors, laminate CPL		frame and panel doors, standard matt
	entrance doors, laminate CPL		flush doors, standard matt
	technical doors, laminate CPL		
	glass doors		

Presented prices of the door leaves doesn't include prices of the door frames and door handles.

The price list is valid from **01/07/2026**.

Producer provides 24 months of warranty for door leaf and door frames.

The photos and visualizations used in the catalog show door leaves in the width of 80 cm (does not apply to side panels). In the case of other door widths, the proportions of the collection pattern layout, glazing, frames, millings, graphics will change. More TECHNICAL INFORMATION and informations referred to assembly process are available in product guarantee card.

This product catalogue shall not constitute an offer under the regulations of the Civil Code and is published only for information purposes. Information provided in this catalogue was up-to-date on the day the catalogue was published. Due to the company policy of constant development DRE reserves the right to introduce (without prior notice) of changes to technical parameters, equipment, extended warranty conditions and product specification. The actual colours may vary from the colours printed in this catalogue. We reserve the right to errors in print.

National Technical Assessments and Product Standards:

National Technical Assessment ITB-KOT-2019/0860 edition 2 (sliding system)

National Technical Assessment ITB-KOT-2018/0633 ed. 2 (ATHOS fire - resistant doors)

National Technical Assessment ITB-KOT-2022/2051, edition 1 (glass door)

National Technical Assessment ITB-KOT-2021/1945 edition 1 (folding and sliding glass doors)

National Technical Assessment ITB-KOT-2017/0011 3rd edition (ENTER/SOLID/SOLID RC2)

National Technical Assessment ITB-KOT-2018/0407 edition 2 (OLIMP)

PN-EN 14351-2:2018-12 (interior doors, NEFRYT doors)

National Technical Assessment ITB-KOT-2019/0805 edition 2 (steel door frames)

PN-EN 16034:2014-11 (fire resistance and/or smoke control properties, NEFRYT doors)

DRE Sp. z o.o.

Gronowo Górne ul. Nefrytowa 4,
82-300 Elbląg - Poland

mob/WhatsApp: +48 571 305 037
mob/WhatsApp: +48 537 870 031
e-mail: export@dre.pl

working hours:
Monday - Friday: 8:00 AM to 4:00 PM
Saturday - Sunday: closed

www.dre.eu

